


DRG No.	ISSUE	TYPE No.	DIM. IN:	ODC:QS-40077	THIS DRAWING AND THE COPYRIGHT AND DESIGN RIGHT THEREIN ARE THE PROPERTY OF OXLEY DEVELOPMENTS CO. LTD. AND MUST NOT BE REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.
CP32903	3	OXL/CLH/100/-/FLXX/-	MILLIMETRES	ISSUE 1	
				DO NOT SCALE	
					ISS
					MODIFICATION
					DATE
					3
					CHANGE No. 05/243
					18.7.05

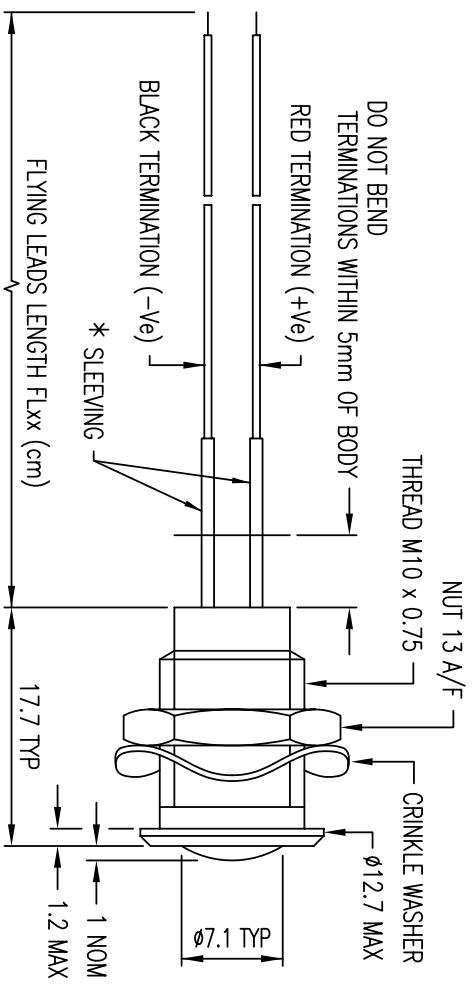

* FOR 110V : BLUE SLEEVING ON RED TERMINATION & BLACK SLEEVING ON BLACK TERMINATION
 FOR 240V : BLACK SLEEVING ON BOTH TERMINATIONS


MATERIALS AND FINISHES	
DESCRIPTION	MATERIAL, FINISH
BODY	ALUMINIUM, MATT BLACK ANODISED
LENS	POLYCARBONATE
TERMINATIONS	FLYING LEADS
NUT	ALUMINIUM ALLOY
WASHER	BeCu, TIN PLATED

OPERATING AND STORAGE TEMPERATURE : -40°C to 85°C

ELECTRICAL CHARACTERISTICS											
	AGds	RED	YELLOW	GREEN	BLUE	WHITE					
LUMINOUS INTENSITY TYPICAL (mcd AT RATED VOLTAGE)	110	240	110	240	110	240	110	240	110	240	110
FORWARD CURRENT (mA) TYP	300	150	250	125	315	160	300	150	250	125	300
REVERSE VOLTAGE (V) MAX	5	2.5	2.5	1	5	2.5	5	2.5	5	2.5	5
RATED VOLTAGE											

MOUNTING DETAILS	
MOUNTING HOLE :	φ10.15±0.1
RECOMMENDED MOUNTING TORQUE :	1Nm
CHASSIS THICKNESS :	1.5mm (Min)

WHEN ORDERING, PLEASE STATE TYPE NUMBER, SPECIFYING FLYING LEAD LENGTH, OPERATING VOLTAGE & LED COLOUR

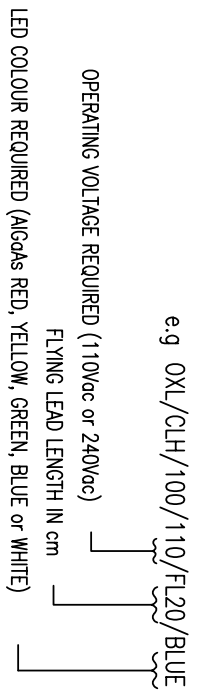

MATERIAL	DRAWN
AS STATED	Simon Russam
FINISH	CHECKED
AS STATED	T. DAVIS
PLATING	APPROVED
AS STATED	DA01/322
TOLERANCE	DATE
AS STATED	2 APR 01
REMARKS	
TITLE	
LOW PROFILE HIGH INTENSITY LED INDICATOR LAMP	

Tel. 01229 589231
 Fax. 01229 585090

OXLEY DEVELOPMENTS COMPANY LTD.

Uiverston Cumbria LA12 9QC ENGLAND

SCALE 2 : 1

TYPE No. OXL/CLH/100/-/FLXX/-

DRG No. CP32903

ISSUE 3