

## LUM – Technical Information

**Extremely economical batten luminaire with innovative T5 lamp.**



### **Tender text**

- OSRAM ECOPACK®-FH provide the same light, using less power than comparable batten luminaires of the same length using 26mm fluorescent tubes
- Compact batten luminaire for fixed connection
- Long lamp life, thanks to cut-off technology
- Equipped with innovative LUMILUX® T5 830 HE fluorescent lamp
- With QUICKTRONIC® QT*i* electronic control gear

### **Table of contents:**

<b>Tender text</b> .....	<b>1</b>
<b>A) Technical Information</b> .....	<b>2</b>
<b>1) Housing, Mounting and Accessories</b> .....	<b>2</b>
<b>2) Electrical Installation</b> .....	<b>3</b>
<b>3) Optical features</b> .....	<b>4</b>
<b>4) Control</b> .....	<b>5</b>
<b>B) Logistic Data</b> .....	<b>5</b>


## A) Technical Information

### 1) Housing, Mounting and Accessories

- With prismatic lamp cover for uniform light distribution
- Accessories: Pendant kit and louvre

Product name	OSRAM ECOPACK-FH 14 W	OSRAM ECOPACK-FH 21 W	OSRAM ECOPACK-FH 28 W	OSRAM ECOPACK-FH 35 W
Body material	steel			
Color of the luminaire (RAL)	white			
Cover material	polycarbonate			
Type of cover	prismatic			

Length l [mm]	584	884	1184	1484
Width b [mm]	38			
Height h [mm]	58			
Hole spacing a [mm]	538	838	1138	1438

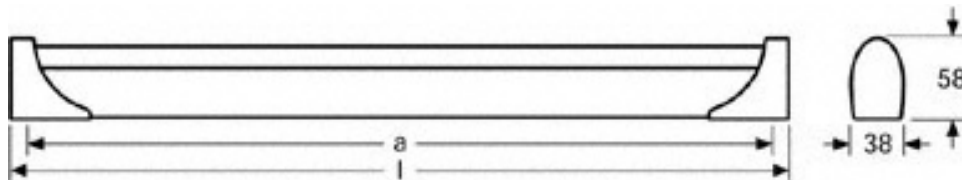

Type of connection	Fixed			
Net weight [g]	820	950	1150	1350

Protection class	I
Type of protection (IP code)	IP 20
Protection against ignition and fire	F; MM
Glow Wire Test according to IEC 695-2-1 (> 650°C)	-
Shock resistance (IK code)	-
Approval marks	ENEC10 VDE
Luminaire efficiency $\eta$	0.84

## Pendant kit



Suitable for all versions of the ECOPACK® family; contains 2 fixings, adjustable cap holders, steel cable for pendant lengths of up to 2 m, and strain relief

## Louvre



Double parabolic, fit the appropriate lengths of all OSRAM ECOPACK® with, or for, T5 lamps. Suitable for screen-based workplaces. Surface: Highly polished, low-irisation aluminium (Alanod Miro 4).

## 2) Electrical Installation


- For fixed connection
- Low power consumption

Product name	OSRAM ECOPACK-FH 14 W	OSRAM ECOPACK-FH 21 W	OSRAM ECOPACK-FH 28 W	OSRAM ECOPACK-FH 35 W
Nominal wattage [W]	14	21	28	35
Mains voltage [V]	230-240			
Mains frequency [Hz]	50-60			

### 3) Optical features

- Equipped with innovative LUMILUX® T5 830 HE fluorescent lamp

Product name	OSRAM ECOPACK-FH 14 W	OSRAM ECOPACK-FH 21 W	OSRAM ECOPACK-FH 28 W	OSRAM ECOPACK-FH 35 W
Equipped with Lamp	Yes			
Lamp type	LUMILUX® T5 830 HE			
Number of lighting outlets	1			
Base	G5			
Lifetime lamp	20,000 h			
Light color	830			
Color rendering index (CRI)	80...89			
Color temperature [K]	3000 K			
Luminous flux [lm]	1200	1900	2600	3300

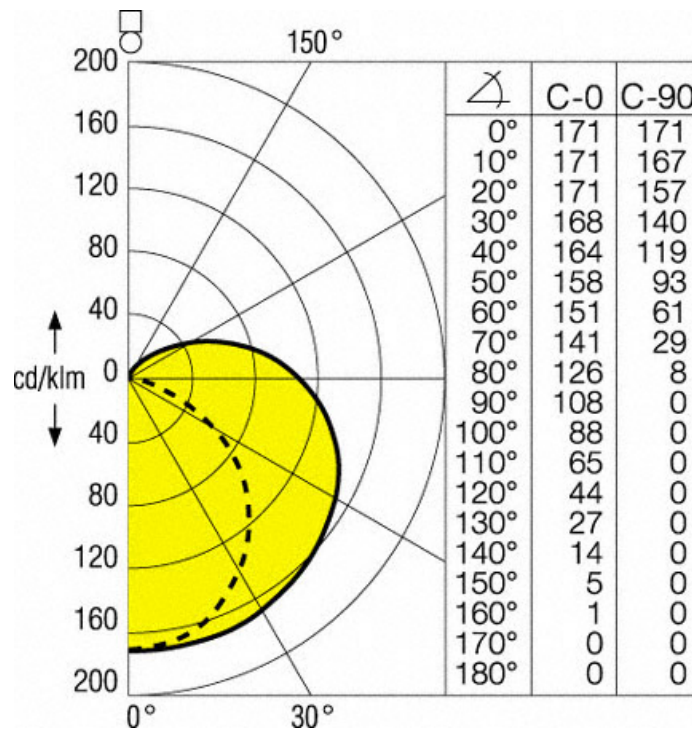

## 4) Control

- With QUICKTRONIC® QT*i* electronic control gear
- Quick start, flicker free light

Product name	OSRAM ECOPACK-FH 14 W	OSRAM ECOPACK-FH 21 W	OSRAM ECOPACK-FH 28 W	OSRAM ECOPACK-FH 35 W
Control gear	QUICKTRONIC® QT <i>i</i>			
Permissible sinusoidal operating voltage [V <sub>AC</sub> ]	198-264			
Dimmable	No			
Through-wiring	E.g. for batten luminaires			
Energy Efficiency Index EEI	A2			

## B) Logistic Data

Product reference	Product number (EAN 10)	Color	Wattage	SU
OSRAM ECOPACK-FH 14 W	4050300 <b>513249</b>	white	14	4x1
OSRAM ECOPACK-FH 21 W	4050300 <b>513263</b>	white	21	4x1
OSRAM ECOPACK-FH 28 W	4050300 <b>513287</b>	white	28	4x1
OSRAM ECOPACK-FH 35 W	4050300 <b>513300</b>	white	35	4x1

### Accessories:

Product reference	Product number (EAN 10)	Color	Wattage	SU
Pendant kit	4050300 <b>792200</b>	silver	-	4x1
OSRAM ECOPACK® Louvre	4008321 <b>079886</b>	white	14/24	4x1
OSRAM ECOPACK® Louvre	4008321 <b>079909</b>	white	21/39	4x1
OSRAM ECOPACK® Louvre	4008321 <b>080424</b>	white	28/54	4x1
OSRAM ECOPACK® Louvre	4008321 <b>080448</b>	white	35/49/80	4x1