


| Type         | Size       | Description                | Part No.    |
|--------------|------------|----------------------------|-------------|
| Incandescent | G11 (G-3½) | Miniature Screw lamp (MES) | (see table) |

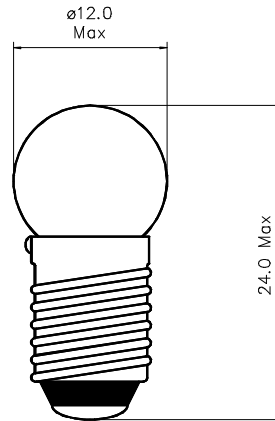

Drawing not to scale  
All dimensions in mm

### PHOTOMETRY DATA

| Farnell Part No. | SLI P/N | Lamp Rating | Test Volts | Current (mA) |     |     | Light Output (Lm) |      |      | Fil Shape | Life (Hrs) |
|------------------|---------|-------------|------------|--------------|-----|-----|-------------------|------|------|-----------|------------|
|                  |         |             |            | Min          | Nom | Max | Min               | Nom  | Max  |           |            |
| 328285           | G638    | 1.25V 0.3W  | 1.25       | 225          | 250 | 275 | 0.75              | 1.0  | 1.25 | S-2       | 10         |
| 328297           | G627    | 2.5V 0.5W   | 2.5        | 180          | 200 | 220 | 3.0               | 3.8  | 4.5  | C-2R      | 10         |
| 526952           | G628    | 2.5V 0.63W  | 2.5        | 225          | 250 | 275 | 5.0               | 5.6  | 6.0  | C-2R      | 30         |
| 265305           | G191    | 3.5V 0.52W  | 3.5        | 135          | 150 | 165 | 1.0               | 1.5  | 2.0  | C-2R      | 5000       |
| 328303           | G647    | 3.5V 1.05W  | 3.5        | 270          | 300 | 330 | 4.5               | 6.0  | 7.5  | C-2R      | 1000       |
| 526964           | G978    | 3.8V 0.84W  | 3.8        | 207          | 220 | 233 | 7.6               | 9.0  | 10.3 | C-2R      | 25         |
| 328315           | G991    | 6V 0.24W    | 6.0        | 36           | 40  | 44  | 0.35              | 0.45 | 0.55 | C-2R      | 10000      |
| 328327           | G198    | 6V 0.36W    | 6.0        | 54           | 60  | 66  | 0.75              | 1.0  | 1.25 | C-2R      | 10000      |
| 328339           | G473    | 6.5V 0.98W  | 6.5        | 135          | 150 | 165 | 4.8               | 6.0  | 7.2  | C-2R      | 3000       |
| 328340           | G501    | 6.5V 1.95W  | 6.5        | 270          | 300 | 330 | 10                | 12   | 14   | C-2R      | 4000       |
| 328352           | G573    | 12V 1.2W    | 12         | 90           | 100 | 110 | 3.7               | 5    | 6.3  | C-2V      | 5000       |
| 328364           | G987    | 12V 2.2W    | 12         | 165          | 183 | 201 | 8.5               | 11   | 13.5 | C-2V      | 3000       |
| 328376           | G592    | 24V 1.2W    | 24         | 45           | 50  | 55  | 3.0               | 4.0  | 5.0  | C-2F      | 5000       |
| 328388           | G650    | 24V 2.8W    | 24         | 102          | 116 | 130 | 9.0               | 12.0 | 15.0 | C-2F      | 3000       |

### NOTES:

- 1) E10/13 nickel-plated screw cap in accordance with IEC 61-1, (BS EN 60061-1), sheet 7004-22-x.
- 2) Metal base to be durably marked with rating and trademark.