
ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-FD04 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	В	REVISED & REDRAWN	J.C.	12/15/92			J.L.	
948	С	UPDATED, WAS IN 7***	HYO	7/11/00	JC	9/8/00	JC	9/8/00

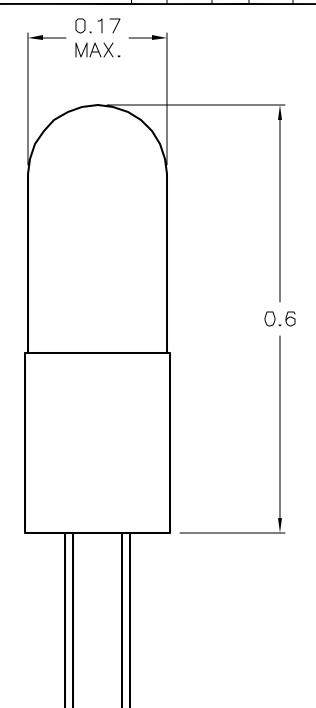

SPECIFICATIONS:

1. Volts: 14

2. AMPS: 0.08

3. Watts: 1.12

4. MSCP: 0.5

5. Filament: C-2F

6. Life: 1000 Hours

SPC-FOD4.DWG

RISCLADIENT
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION
AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE
BEYOND OUR CONTROL THE USER SHILL DETERMINE THE SUITABLITY OF THE PRODUCT FOR THE
NIENDED LIBE AND ASSUME ALL RISK AND LIABLITY WHATSOEVER IN CONNECTION THEREWITH. **SPC TECHNOLOGY** DRAWN BY: DATE: DRAWING TITLE: UNLESS OTHERWISE T 1-1/4 BI-PIN BASE LAMP 12/16/92 J.C. SPECIFIED, DIMENSIONS ARE CHECKED BY: DATE: ELECTRONIC FILE SIZE DWG. ND. FOR REFERENCE 2/2/93 J.P. 7646 C Α 50N8187.DWG PURPOSES ONLY. APPROVED BY: DATE: U.O.M.: INCHES SCALE: NTS SHEET: 1 OF 1 2/2/93 J.L.