


ASMT-MxL1

1W Diffused Power LED Light Source on MCPCB

Preliminary Datasheet

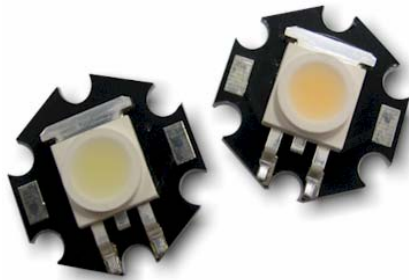

Description

1W Diffused Power LED Light Source is a high performance energy efficient device which can handle high thermal and high driving current. The exposed pad design has excellent heat transfer from the package to the motherboard.

The Cool White Power LED is available in various color temperature ranging from 4000K to 10000K and Warm White Power LED ranging from 2600K to 4000K. The product has high Color Rendering Index (CRI) which provides excellent color perception and visual clarity.

The low profile package design is suitable for a wide variety of applications especially where height is a constraint.

Features

- Available in Cool White and Warm White color.
- Energy efficient
- High current operation.
- Long operation life.
- Wide viewing angle.
- Silicone encapsulation

Specifications


- InGaN Technology
- 3.6V, 350 mA (typical)
- 110 viewing angle

Applications

- Portable (flash light, bicycle head light)
- Reading light
- Architectural lighting
- Garden lighting
- Decorative lighting

This preliminary data is provided to assist you in the evaluation of product(s) currently under development. Until Avago Technologies releases this product for general sales, Avago Technologies reserves the right to alter prices, specifications, features, capabilities, functions, release dates, and remove availability of the product(s) at anytime.

Package Dimensions

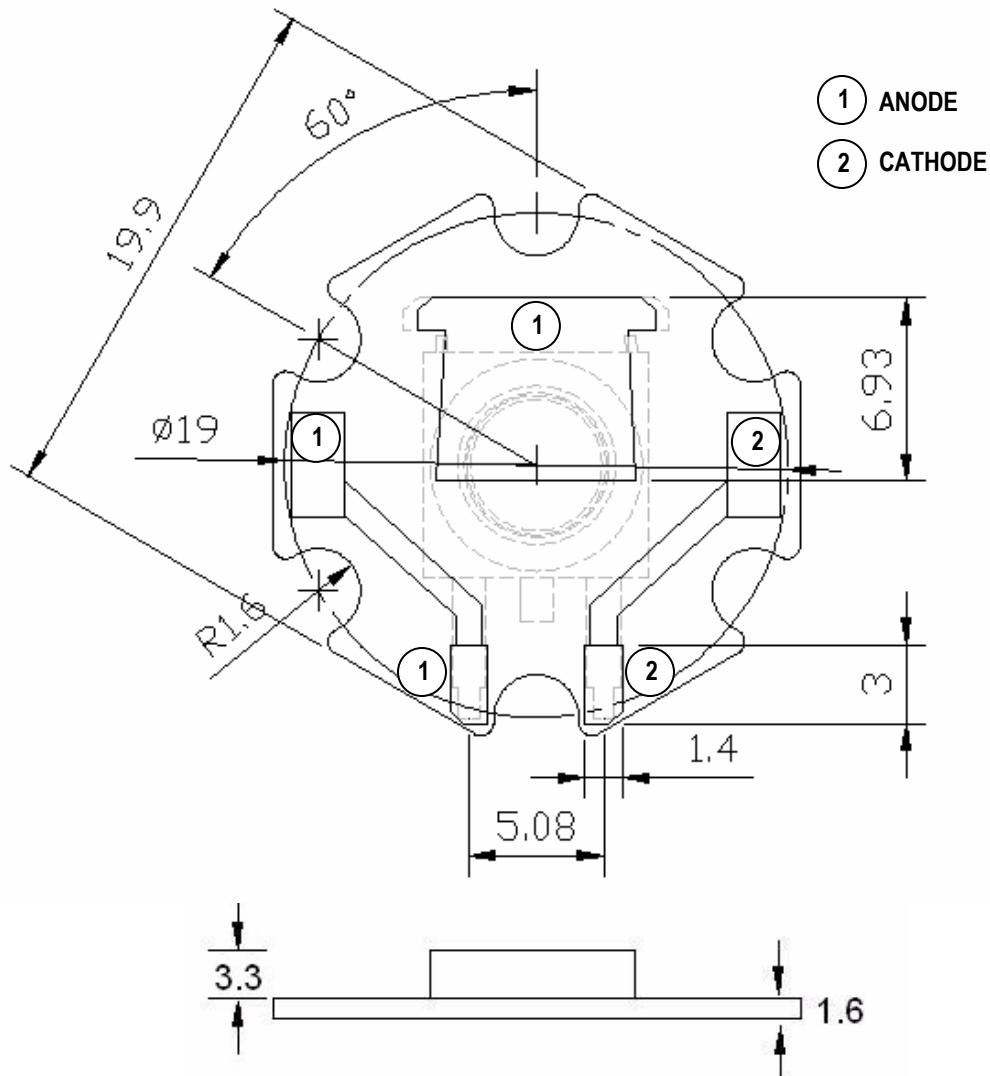

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS.
2. TOLERANCE IS ± 0.1 MM UNLESS OTHERWISE SPECIFIED.

Device Selection Guide at Junction Temperature $T_j = 25^\circ\text{C}$

| Color | Part Number | Luminous Flux, $\Phi_v^{[1,2,3]}$ (lm) | | | Test Current (mA) | Dice Technology |
|---------------------|-------------|--|------|------|-------------------|-----------------|
| | | Min | Typ | Max | | |
| Cool White Diffused | ASMT-MWL1 | 43.0 | 55.0 | 73.0 | 350 | InGaN |
| Warm White Diffused | ASMT-MYL1 | 43.0 | 46.0 | 73.0 | 350 | InGaN |


Notes:

1. Φ_v is the total luminous flux output as measured with an integrating sphere at 25ms mono pulse condition.
2. Flux tolerance is $\pm 10\%$
3. Φ_v data are only applicable for ASMT-MxB1 component level device only.

This preliminary data is provided to assist you in the evaluation of product(s) currently under development. Until Avago Technologies releases this product for general sales, Avago Technologies reserves the right to alter prices, specifications, features, capabilities, functions, release dates, and remove availability of the product(s) at anytime.

Part Numbering System

ASMT-M x L1 – N x₁ x₂ x₃ 0

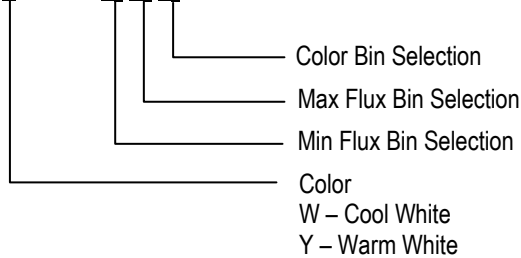

Absolute Maximum Ratings^[3] at T_A = 25°C

| Parameter | ASMT-MxL1 | Units |
|-------------------------------------|-------------|-------|
| DC Forward Current ^[1] | 350 | mA |
| Peak Pulsing Current ^[2] | 500 | mA |
| Power Dissipation | 1400 | mW |
| LED Junction Temperature | 110 | °C |
| Operating Ambient Temperature Range | -40 to +85 | °C |
| Storage Temperature Range | -40 to +100 | °C |

Note:

- DC forward current – derate linearly based on Figure 5.
- Pulse condition duty factor = 10%, Frequency = 1kHz.
- Absolute Maximum Rating data are only applicable for ASMT-MxB1 component level device only.

Optical Characteristics^[2] (T_A = 25 °C)

| Part Number | Color | Correlated Color Temperature, CCT (Kelvin) | | Viewing Angle 2θ _½ ^[1] (Degrees) | Luminous Efficiency (lm/W) |
|-------------|---------------------|--|-------|--|----------------------------|
| | | Min | Max | Typ | Typ |
| ASMT-MWL1 | Cool White Diffused | 4000 | 10000 | 110 | 44 |
| ASMT-MYL1 | Warm White Diffused | 2600 | 4000 | 110 | 37 |

Notes:

- θ_½ is the off-axis angle where the luminous intensity is ½ the peak intensity.
- Optical Characteristics data are only applicable for ASMT-MxB1 component level device only.

Electrical Characteristic^[2] (T_A = 25°C)

| Dice Type | Forward Voltage V _F (Volts) @ I _F = 350mA | | Reverse Voltage V _R (Volts) | Thermal Resistance R _{θj-b} (°C/W) ^[1] |
|-----------|---|------|--|--|
| | Typ | Max. | Max. | Typ. |
| InGaN | 3.6 | 4.0 | 5 | 18 |

Note:

- R_{θj-b} is Thermal Resistance from LED junction to MCPCB.
- Electrical Characteristic data are only applicable for ASMT-MxB1 component level device only.

This preliminary data is provided to assist you in the evaluation of product(s) currently under development. Until Avago Technologies releases this product for general sales, Avago Technologies reserves the right to alter prices, specifications, features, capabilities, functions, release dates, and remove availability of the product(s) at anytime.

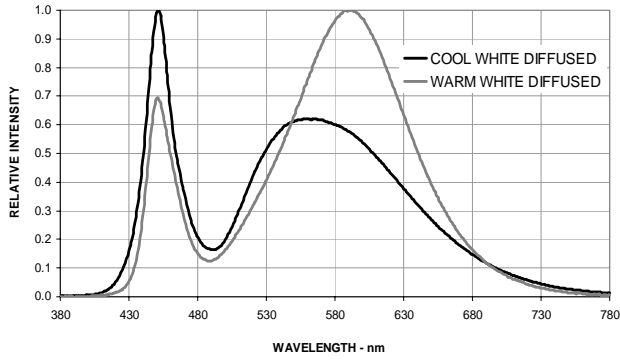


Figure 1: Relative Intensity vs. Wavelength

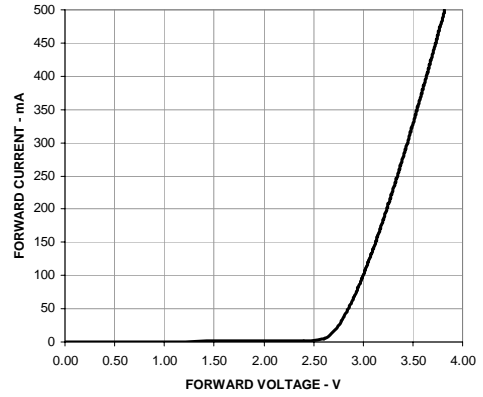


Figure 2: Forward Current vs. Forward Voltage

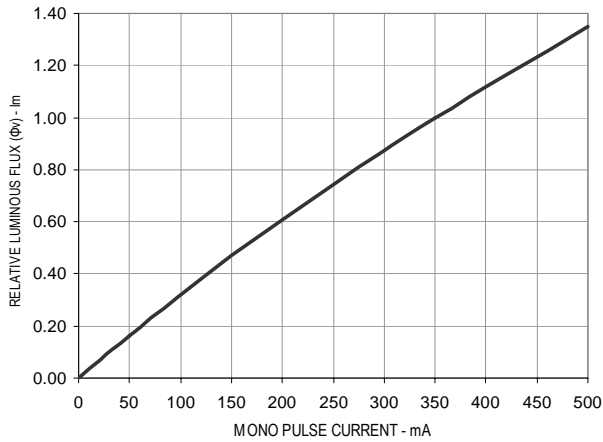


Figure 3: Relative Luminous Flux vs. Mono Pulse Current

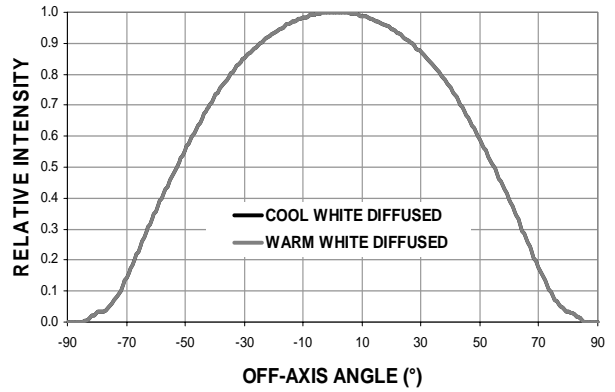


Figure 4: Radiation Pattern

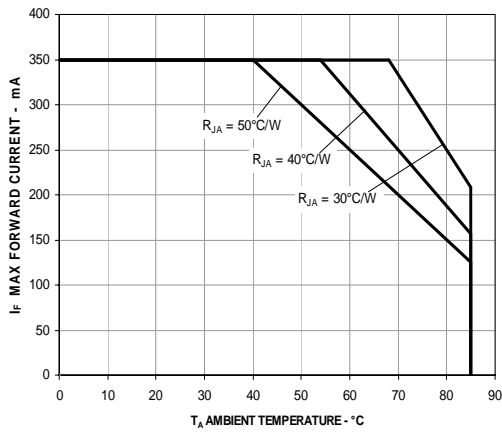


Figure 5. Maximum forward current vs. ambient temperature
 Derated based on $T_{jMAX} = 110^{\circ}C$, $R_{\theta JA} = 30^{\circ}C/W$ / $40^{\circ}C/W$ and $50^{\circ}C/W$

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E



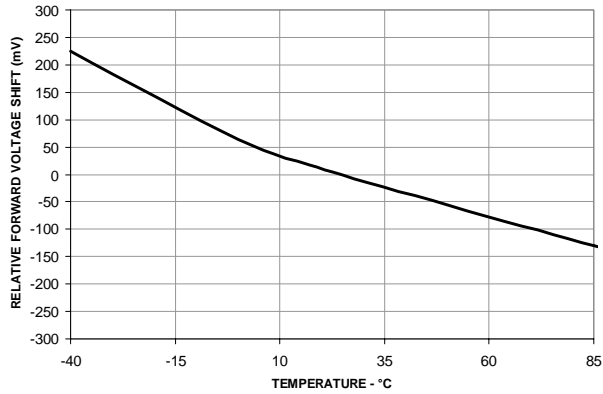


Figure 6: Temperature vs. relative forward voltage shift

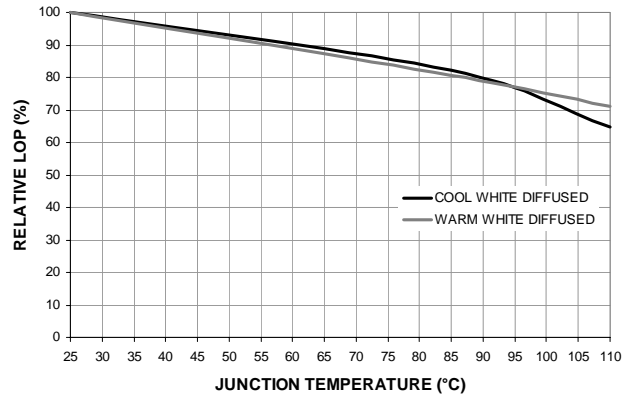


Figure 7: Relative LOP vs. junction temperature

Note: All parametric charts are only applicable for ASMT-MxB1 component level device only.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E

AVAGO
TECHNOLOGIES

Flux Bin Limit⁽¹⁾ (For reference only) [x₁ x₂]

| Bin | Flux (lm) at 350mA | |
|-----|--------------------|------|
| | Min | Max |
| A | 5.5 | 7.0 |
| B | 7.0 | 9.0 |
| C | 9.0 | 11.5 |
| D | 11.5 | 15.0 |
| E | 15.0 | 19.5 |
| F | 19.5 | 25.5 |
| G | 25.5 | 33.0 |
| H | 33.0 | 43.0 |
| J | 43.0 | 56.0 |
| K | 56.0 | 73.0 |

Tolerance for each bin limits is $\pm 10\%$

Note:

1. Flux Bin Limit is only applicable for ASMT-MxB1 component level device only

Color Bin Selections [x₃]

Individual reel will contain parts from one full bin only.

Cool White

| 0 | Full Distribution |
|---|------------------------|
| A | A only |
| B | B only |
| C | C only |
| D | D only |
| E | E only |
| F | F only |
| G | G only |
| H | H only |
| Z | A and B only |
| Y | B and C only |
| W | C and D only |
| V | D and E only |
| U | E and F only |
| T | F and G only |
| S | G and H only |
| Q | A, B and C only |
| P | B, C and D only |
| N | C, D and E only |
| M | D, E and F only |
| L | E, F and G only |
| K | F, G and H only |
| J | Special Color Bin |
| 1 | A, B, C and D only |
| 2 | E, F, G and H only |
| 3 | B, C, D and E only |
| 4 | C, D, E and F only |
| 5 | A, B, C, D and E only |
| 6 | B, C, D, E, and F only |

Warm White

| 0 | Full Distribution |
|---|------------------------|
| A | A only |
| B | B only |
| C | C only |
| D | D only |
| E | E only |
| F | F only |
| Z | A and B only |
| Y | B and C only |
| W | C and D only |
| V | D and E only |
| U | E and F only |
| Q | A, B and C only |
| P | B, C and D only |
| N | C, D and E only |
| M | D, E and F only |
| J | Special Color Bin |
| 1 | A, B, C and D only |
| 2 | E, F, G and H only |
| 3 | B, C, D and E only |
| 4 | C, D, E and F only |
| 5 | A, B, C, D and E only |
| 6 | B, C, D, E, and F only |

For product information and a complete list of distributors, please go to our web site: www.avagotech.com


Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E

AVAGO
TECHNOLOGIES

Primary Color Binning


| Cool White | Color Limits ^[1] (Chromaticity Coordinates) | | | | |
|------------|---|-------|-------|-------|-------|
| Bin A | X | 0.367 | 0.362 | 0.329 | 0.329 |
| | Y | 0.400 | 0.372 | 0.345 | 0.369 |
| Bin B | X | 0.362 | 0.356 | 0.329 | 0.329 |
| | Y | 0.372 | 0.330 | 0.302 | 0.345 |
| Bin C | X | 0.329 | 0.329 | 0.305 | 0.301 |
| | Y | 0.369 | 0.345 | 0.322 | 0.342 |
| Bin D | X | 0.329 | 0.329 | 0.311 | 0.305 |
| | Y | 0.345 | 0.302 | 0.285 | 0.322 |
| Bin E | X | 0.303 | 0.307 | 0.283 | 0.274 |
| | Y | 0.333 | 0.311 | 0.284 | 0.301 |
| Bin F | X | 0.307 | 0.311 | 0.290 | 0.283 |
| | Y | 0.311 | 0.285 | 0.265 | 0.284 |
| Bin G | X | 0.388 | 0.379 | 0.362 | 0.367 |
| | Y | 0.417 | 0.383 | 0.372 | 0.400 |
| Bin H | X | 0.379 | 0.369 | 0.356 | 0.362 |
| | Y | 0.383 | 0.343 | 0.330 | 0.372 |

Tolerances ± 0.01

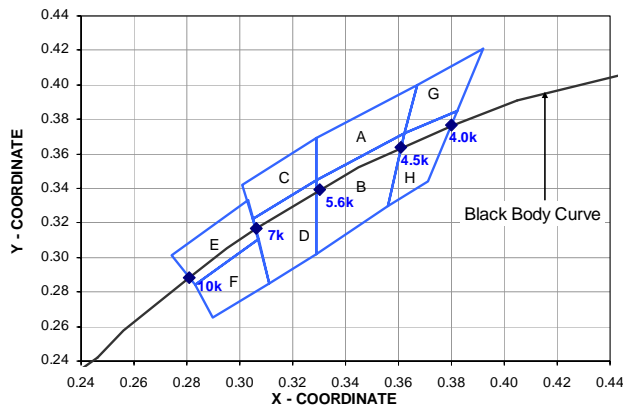

| Warm White | Color Limits ^[1] (Chromaticity Coordinates) | | | | |
|------------|---|-------|-------|-------|-------|
| Bin A | X | 0.452 | 0.488 | 0.470 | 0.438 |
| | Y | 0.434 | 0.447 | 0.414 | 0.403 |
| Bin B | X | 0.438 | 0.470 | 0.452 | 0.424 |
| | Y | 0.403 | 0.414 | 0.384 | 0.376 |
| Bin C | X | 0.407 | 0.418 | 0.452 | 0.438 |
| | Y | 0.393 | 0.422 | 0.434 | 0.403 |
| Bin D | X | 0.395 | 0.407 | 0.438 | 0.424 |
| | Y | 0.362 | 0.393 | 0.403 | 0.376 |
| Bin E | X | 0.381 | 0.387 | 0.418 | 0.407 |
| | Y | 0.377 | 0.404 | 0.422 | 0.393 |
| Bin F | X | 0.373 | 0.381 | 0.407 | 0.395 |
| | Y | 0.349 | 0.377 | 0.393 | 0.362 |

Tolerances ± 0.01

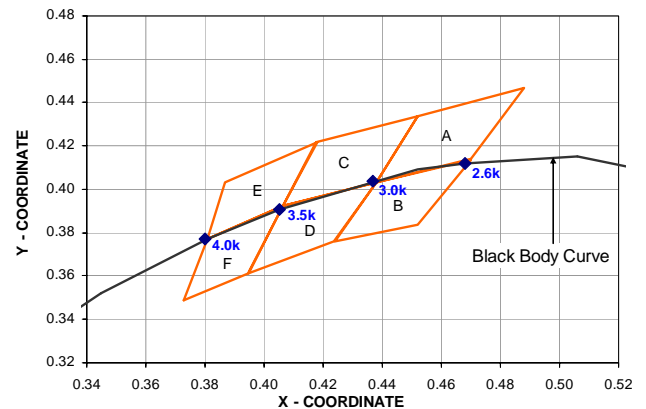

Note:

- Color Limit and Color binning chart are only applicable for ASMT-MxB1 component level device only

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E

AVAGO
TECHNOLOGIES

Sub-Color Binning


(Only Applicable for Color Bin A to Bin D and Bin G to Bin H)

Color Limits⁽¹⁾

| Cool White | (Chromaticity Coordinates) | | | | |
|------------|----------------------------|-------|-------|-------|-------|
| Bin A1 | X | 0.364 | 0.367 | 0.348 | 0.347 |
| | Y | 0.383 | 0.400 | 0.385 | 0.372 |
| Bin A2 | X | 0.364 | 0.362 | 0.346 | 0.347 |
| | Y | 0.383 | 0.372 | 0.359 | 0.372 |
| Bin A3 | X | 0.329 | 0.329 | 0.348 | 0.347 |
| | Y | 0.357 | 0.369 | 0.385 | 0.372 |
| Bin A4 | X | 0.329 | 0.329 | 0.347 | 0.346 |
| | Y | 0.345 | 0.357 | 0.372 | 0.359 |
| Bin B1 | X | 0.362 | 0.360 | 0.344 | 0.346 |
| | Y | 0.372 | 0.357 | 0.344 | 0.359 |
| Bin B2 | X | 0.360 | 0.358 | 0.343 | 0.344 |
| | Y | 0.357 | 0.343 | 0.331 | 0.344 |
| Bin B3 | X | 0.358 | 0.356 | 0.341 | 0.343 |
| | Y | 0.343 | 0.330 | 0.314 | 0.331 |
| Bin B4 | X | 0.329 | 0.329 | 0.346 | 0.344 |
| | Y | 0.331 | 0.345 | 0.359 | 0.344 |
| Bin B5 | X | 0.329 | 0.344 | 0.343 | 0.329 |
| | Y | 0.331 | 0.344 | 0.331 | 0.320 |
| Bin B6 | X | 0.343 | 0.341 | 0.329 | 0.329 |
| | Y | 0.331 | 0.314 | 0.302 | 0.320 |
| Bin C1 | X | 0.329 | 0.329 | 0.315 | 0.314 |
| | Y | 0.369 | 0.357 | 0.344 | 0.355 |
| Bin C2 | X | 0.329 | 0.329 | 0.316 | 0.315 |
| | Y | 0.357 | 0.345 | 0.333 | 0.344 |
| Bin C3 | X | 0.314 | 0.315 | 0.303 | 0.301 |
| | Y | 0.355 | 0.344 | 0.333 | 0.342 |
| Bin C4 | X | 0.315 | 0.316 | 0.305 | 0.303 |
| | Y | 0.344 | 0.333 | 0.322 | 0.333 |

| Cool White | (Chromaticity Coordinates) | | | | |
|------------|----------------------------|-------|-------|-------|-------|
| Bin D1 | X | 0.329 | 0.329 | 0.317 | 0.316 |
| | Y | 0.345 | 0.331 | 0.320 | 0.333 |
| Bin D2 | X | 0.329 | 0.329 | 0.318 | 0.317 |
| | Y | 0.331 | 0.320 | 0.310 | 0.320 |
| Bin D3 | X | 0.329 | 0.329 | 0.320 | 0.318 |
| | Y | 0.320 | 0.302 | 0.293 | 0.310 |
| Bin D4 | X | 0.316 | 0.317 | 0.307 | 0.305 |
| | Y | 0.333 | 0.320 | 0.311 | 0.322 |
| Bin D5 | X | 0.317 | 0.318 | 0.309 | 0.307 |
| | Y | 0.320 | 0.310 | 0.300 | 0.311 |
| Bin D6 | X | 0.318 | 0.320 | 0.311 | 0.309 |
| | Y | 0.310 | 0.293 | 0.285 | 0.300 |
| Bin G1 | X | 0.392 | 0.386 | 0.364 | 0.367 |
| | Y | 0.421 | 0.400 | 0.383 | 0.400 |
| Bin G2 | X | 0.386 | 0.382 | 0.362 | 0.364 |
| | Y | 0.400 | 0.385 | 0.372 | 0.383 |
| Bin H1 | X | 0.382 | 0.378 | 0.360 | 0.362 |
| | Y | 0.385 | 0.370 | 0.357 | 0.372 |
| Bin H2 | X | 0.378 | 0.375 | 0.358 | 0.360 |
| | Y | 0.370 | 0.358 | 0.343 | 0.357 |
| Bin H3 | X | 0.375 | 0.371 | 0.356 | 0.358 |
| | Y | 0.358 | 0.344 | 0.330 | 0.343 |

Tolerances ± 0.01

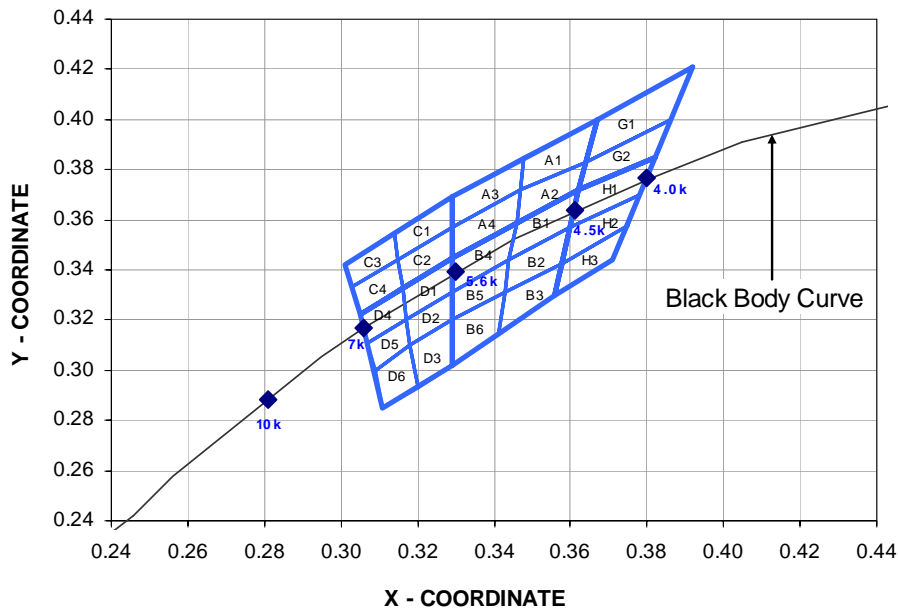

Note:


1. Color Limit and Color binning chart are only applicable for ASMT-MxB1 component level device only

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E

AVAGO
TECHNOLOGIES

Package Tray Dimensions

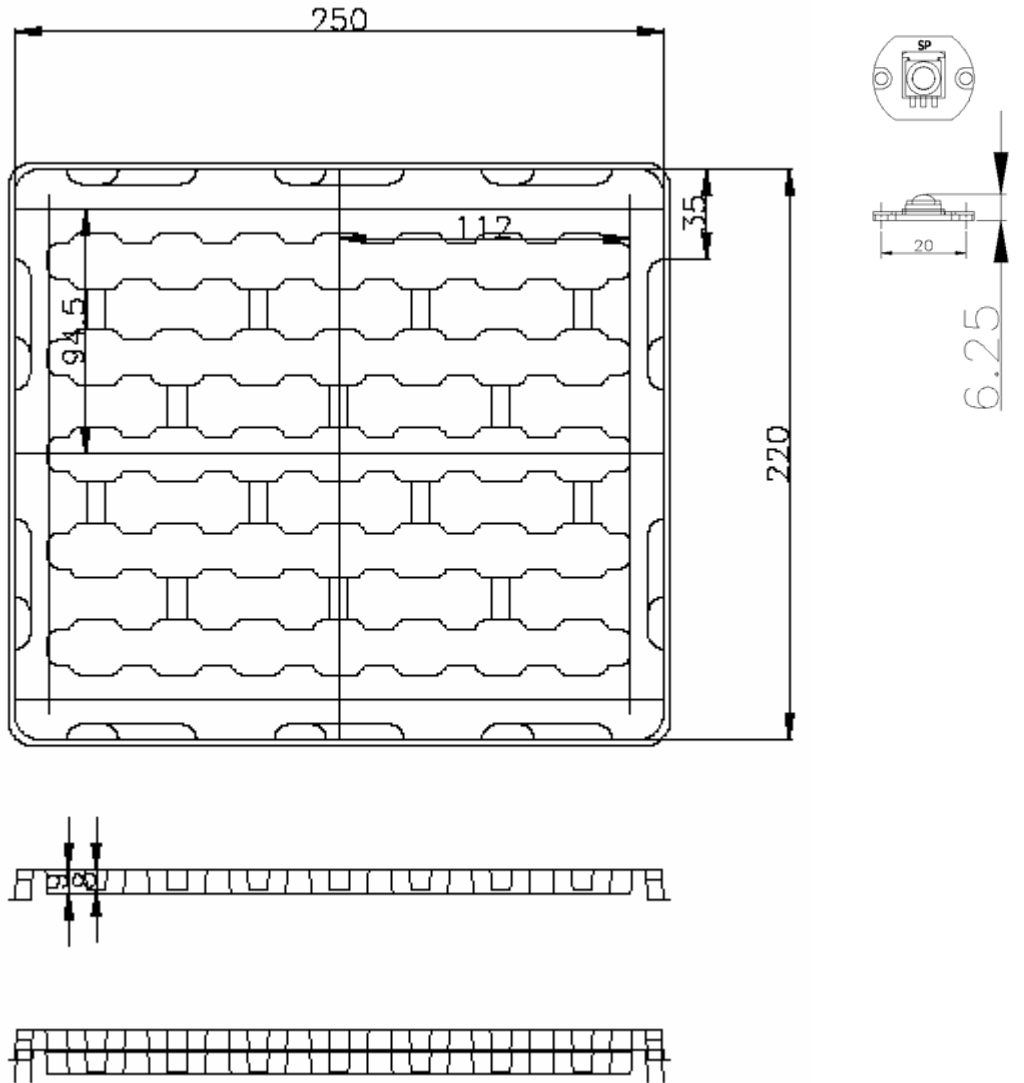

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries. Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No. Pub Number - Date (10/Oct/06) Rev E



Handling Precaution

The encapsulation material of the product is made of silicone for better reliability of the product. As silicone is a soft material, please do not press on the silicone or poke a sharp object onto the silicone. These might damage the product and cause premature failure. During assembly or handling, the unit should be held on the body (white plastic).

DISCLAIMER

AVAGO'S PRODUCTS AND SOFTWARE ARE NOT SPECIFICALLY DESIGNED, MANUFACTURED OR AUTHORIZED FOR SALE AS PARTS, COMPONENTS OR ASSEMBLIES FOR THE PLANNING, CONSTRUCTION, MAINTENANCE OR DIRECT OPERATION OF A NUCLEAR FACILITY OR FOR USE IN MEDICAL DEVICES OR APPLICATIONS. CUSTOMER IS SOLELY RESPONSIBLE, AND WAIVES ALL RIGHTS TO MAKE CLAIMS AGAINST AVAGO OR ITS SUPPLIERS, FOR ALL LOSS, DAMAGE, EXPENSE OR LIABILITY IN CONNECTION WITH SUCH USE.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.
Data subject to change. Copyright © 2005 Avago Technologies Pte. All rights reserved. Obsoletes Pub No.
Pub Number - Date (10/Oct/06) Rev E

