


NLP250 Medical Series

Single Output

Total Power: 250 W
Input Voltage: 85 - 264 VAC
of Outputs: Single

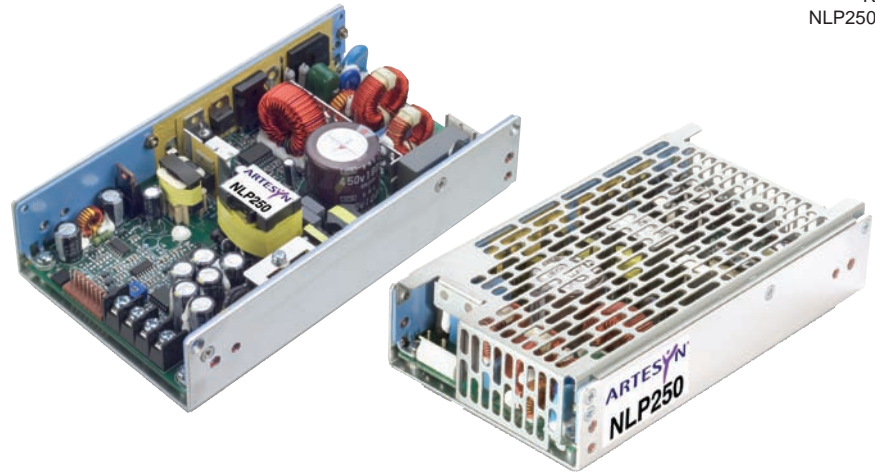

Special Features

- Medical safeties
- Active PFC and EN61000-3-2 compliant
- 250 W on main channel with forced air
- Low profile fits 1U applications
- U-Channel for maximum thermal performance
- Optional cover (CJ suffix)
- 5 V standby output
- 12 V fan output
- Integrated control and monitoring features
- Overcurrent, overvoltage and overtemperature protection
- Compliance to EN55022-B conducted noise standard
- Dual AC fuses
- RoHS compliant
- 2 year warranty

Safety

- VDE0750/EN60950 IEC950/IEC60601-1 File No. 1177400-3336-0759
- UL60601-1 File No. E186249
- Certificate No. 40014041
- CB Ref DE1-36628

Electrical Specifications

| Input | | |
|--|--|---|
| Input voltage range: | Universal input | 85 - 264 Vac |
| Input frequency range: | | 47 - 63 Hz |
| Input surge current: | 264 Vac (cold start) | 40 A max. |
| Safety ground leakage current: | 264 Vac, 50 Hz | 150 μ A |
| Input current: | 120 Vac @ 250 W 230 Vac @ 250 W | 2.78 A rms 1.36 A rms |
| Input fuse: | UL/IEC127 | T6.4 AH, 250 Vac In live and neutral |
| Output | | |
| Maximum power: | 200 LFM forced air 250 LFM with cover | 250 watts |
| Adjustment range: | Main output | \pm 5% |
| Total regulation: (line and load) | Main output Auxiliary outputs | \pm 2.0% \pm 5.0% |
| Turn-on delay: | @ 120 Vac Input | 2.0 s max. |
| Transient response: | Main output 50 - 100% Step at 0.5 A/ μ s | 5.0% or 250 mV max. dev., 1 ms max recovery to 1% |
| Temperature coefficient: | | \pm 0.02%/°C |
| Overvoltage protection: | Main output | 115%, \pm 5% |
| Short circuit protection: | Cyclic operation | Continuous |
| Minimum output current: | Singles | 0 A |
| Auxiliary outputs: (See Note 8, page 3) | 5 Vsb 12 V (fan) | 5 V @ 1.0 A 12 V @ 0.3A |

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated



| EMC Characteristics ⁽⁵⁾ | | |
|--|--|--|
| Conducted emissions: | EN55022, FCC part 15 | Level B |
| Harmonic current correction: | EN61000-3-2 | Compliant |
| Voltage flicker: | EN61000-3-3 | Compliant |
| ESD air: | EN61000-4-2 | Level 3 |
| ESD contact: | EN61000-4-2 | Level 3 |
| Radiated immunity: | EN61000-4-3 | Level 3 |
| Fast transients: | EN61000-4-4 | Level 3 |
| Surge: | EN61000-4-5 | Level 3 |
| Conducted immunity: | EN61000-4-6 | Level 3 |
| Voltage dips: | EN61000-4-11 | Compliant |
| General Specifications | | |
| Hold-up time: | 85 Vac @ 50 Hz | 20 ms @ 250 W |
| Efficiency: | 115 Vac @ 250 W 230 Vac @ 250 W | 84% typ. 86% typ. |
| Isolation voltage: | Input/output Input/chassis | 4000 Vac 2000 Vac |
| Safety approvals (see Note 6, page 3): | UL/cUL UL60601-1, VDE EN60601-1, CAN/CSA22.2 No. 601-1 | |
| Weight: | | 650g (22 oz) |
| MTBF (@25° C): | Telcordia SR-332 MIL-HDBK-217F | 317,000 hours min. 158,000 hours min. |

Environmental Specifications

| | | |
|---------------------------------|--------------------------|------------------|
| Thermal performance: | Operating ambient, | 0 °C to +70 °C |
| | (See derating curve) | |
| | Non-operating | -40 °C to +85 °C |
| | 0 °C to 50 °C ambient, | 250 W |
| | 200 LFM forced air | |
| | 250 LFM with cover | |
| | 0 °C to 50 °C ambient, | 175 W |
| | 0 °C to 40 °C with cover | |
| | Convection cooled | |
| | 50 °C to 70 °C ambient, | Derate linearly |
| Convection cooled | to 50% load | |
| Relative humidity: | Non-condensing | 5 - 95% RH |
| Altitude: | Operating | 10,000 feet max. |
| | Non-operating | 30,000 feet max. |
| Vibration (See Note 7, page 3): | 5 - 500 Hz | 2.5 G rms peak |
| Shock: | Per MIL-STD-810E | 516.4 Part IV |

Ordering Information

| Output Voltage | Output Current | | | Ripple ⁽³⁾ | Total Regulation | Model Numbers ^(9, 10) |
|----------------|----------------|---------------------------------|-----------------------------------|-----------------------|------------------|----------------------------------|
| | Min | Max (free air) ^(1,4) | Max (forced air) ^(2,4) | | | |
| 12 V | 0 A | 14.6 A | 21 A | 120 mV | ± 2.0% | NLP250N-99S12J |
| 24 V | 0 A | 7.3 A | 10.5 A | 240 mV | ± 2.0% | NLP250N-99S24J |

Notes

- Free air convection. Maximum continuous output power not to exceed 175 W. Refer to Figure 1 for the derating curve.
- 200 LFM (250 LFM with cover) forced air cooling from the longer side. Maximum continuous output power not to exceed 250 W.
- Figure is peak-to-peak for room temperature rating. Output noise measurements are made across a 20 MHz bandwidth using a 6 inch twisted pair, terminated with a 10 µF tantalum capacitor and a 0.1 µF ceramic capacitor.
- CAUTION: Allow a minimum of 1 second after disconnecting line power when making thermal measurements. For optimum reliability no part of the heatsink should exceed 115 °C and no semi-conductor case temperature should exceed 120 °C.
- No external filtering required during conducted emissions testing but some applications may require additional filtering to achieve system compliance. Compliance with radiated EMI specifications may require mounting in a suitable enclosure.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- Three orthogonal axes, random vibration 10 minutes for each axes, 2.4 G
- 5 V sb (standby) output is available whenever AC is present, regardless of remote ON/OFF signal status. 12 V (fan) present when main output is present.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. "CJ" suffix indicates covered RoHS version.
- NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.PowerConversion.com> to find a suitable alternative.

Mechanical Drawing

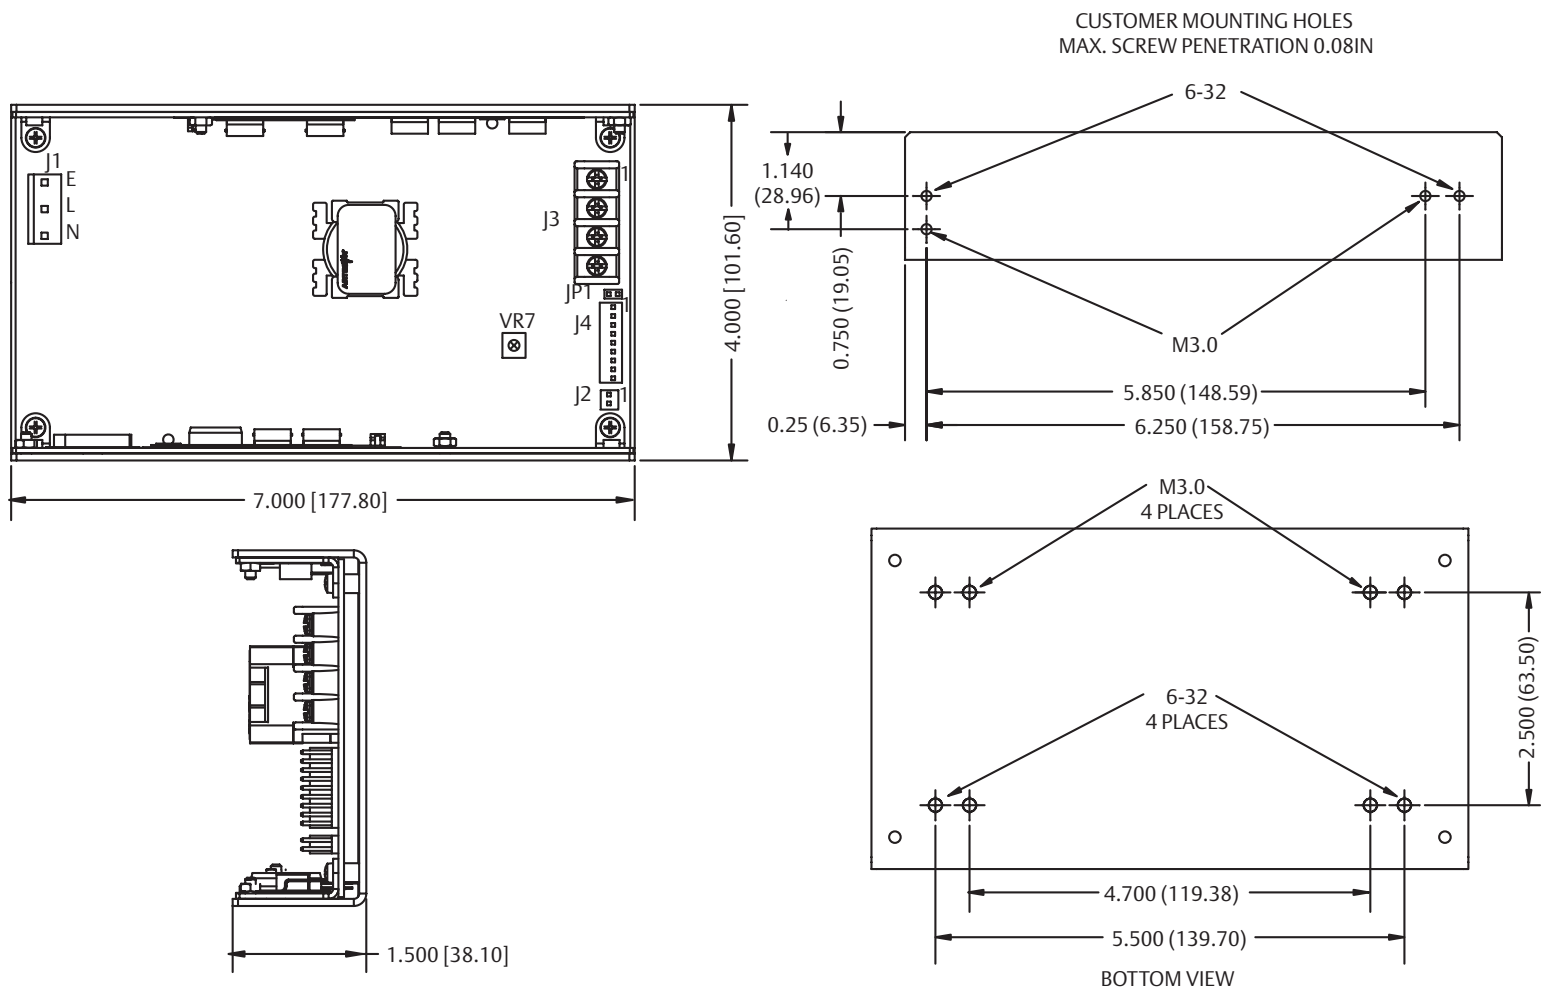


Figure 1: Derating Curve Output Power (Watts)


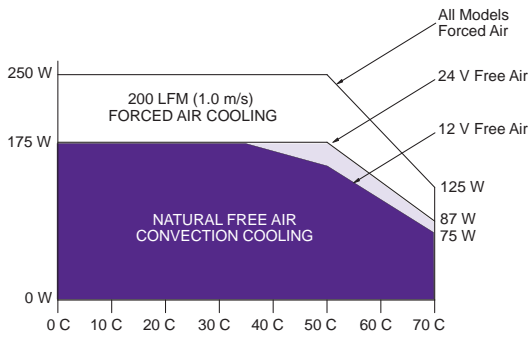


Figure 1b: Derating Curve With Cover Output Power (Watts)

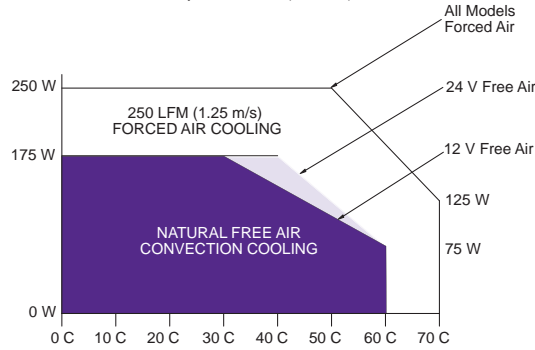

| Connector and Mating Connector Types | | |
|--------------------------------------|--|---|
| Connector | Type | Mating Connector Type |
| J1 | Molex 09-65-2058 (5273 series) void pins 2 and 4 or equivalent | Molex 09-50-8051 or equivalent with Molex 08-52-0113 or equivalent crimp terminals |
| J2 | Molex 22-23-2021 (6373 series) or equivalent | Molex 22-01-3027 (2695 series) or equivalent with Molex 08-50-01113 (2759 series) or equivalent crimp terminals |
| J3 | Molex terminal block 387007504 or equivalent | Terminal block contains #6-32 screw with clamp washer suitable for wire size 12-22 awg (0.5-2.5 mm ²). Max Torque tp 1.36 Nm (12 in.lb) |
| J4 | Molex 22-23-2091 (6373 series) or equivalent | Molex 22-01-3097 (2695 series) or equivalent with Molex 08-50-0113 (2759 series) or equivalent crimp terminals |

| Pin Connections | |
|-----------------|--------------|
| J1 | |
| Pin 1 | Ground/Earth |
| Pin 2 | Live |
| Pin 3 | Neutral |

| Pin Connections Continued | | |
|---------------------------|--------|-------------------------|
| J2 | | |
| Pin 1 | +12 V | Fan Voltage |
| Pin 2 | SGND | Return |
| J3 | | |
| Pin 1 | Vo | + Main Output |
| Pin 2 | Vo | + Main Output |
| Pin 3 | RTN | Main Return |
| Pin 4 | RTN | Main Return |
| J4 | | |
| Pin 1 | +S | +Vo Remote Sense |
| Pin 2 | -S | Vo Remote Sense |
| Pin 3 | LS | Load Share Signal |
| Pin 4 | PS OFF | Remote ON/OFF signal NO |
| Pin 5 | PS ON | Remote ON/OFF signal NC |
| Pin 6 | SGND | Signal Common |
| Pin 7 | PW OK | Power Good |
| Pin 8 | 5 Vsb | Stand-by Voltage |
| Pin 9 | DC OK | DC Power Good Signal |

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2009 Emerson Electric Co.