



LXR3000FM

3.0mm Round Lamp
(Short Leads with 2.29mm Pitch)

Features

- ULTRABRIGHT YELLOW
- HIGH LIGHT OUTPUT
- RELIABLE AND RUGGED
- IC COMPATIBLE

2 of 2

Recommended Maximum Ratings at $T_A=25^\circ$



REVERSE VOLTAGE	5.0V
D.C. FORWARD CURRENT	30mA
PULSE CURRENT (1/10 DUTY CYCLE, 0.1ms PULSE WIDTH)	100mA
OPERATING TEMPERATURE RANGE	-25°C TO +85°C
STORAGE TEMPERATURE RANGE	-25°C TO +100°C
LEAD SOLDERING TEMP. (1.6mm FROM BODY)	260° FOR 5 SEC.

Electrical & Optical Characteristics at $T_A=25^\circ$

Part Number	LED Chip		Lens Colour	Peak Wavelength @ 20mA (nm)	Forward Voltage @ 20mA(V)		Luminous Intensity @ 20mA(mcd)		View Angle 2 θ 1/2 (deg)
	Material	Emitting Colour			Typ.	Max.	Min.	Typ.	
L02R3000F1	GaP	Green	Green Diffused	567	2.1	3.0	1.5	3.7	74
L02R3000F2	GaP	Green	White Diffused	567	2.1	3.0	1.5	3.7	74
L02R3000F3	GaP	Green	Water Clear	567	2.1	3.0	5.0	12.6	50
L02R3000F4	GaP	Green	Green Clear	567	2.1	3.0	5.0	12.6	50
L03R3000F1	GaAsP on GaP	Yellow	Yellow Diffused	585	2.1	3.0	1.2	3.1	74
L03R3000F2	GaAsP on GaP	Yellow	White Diffused	585	2.1	3.0	1.2	3.1	74
L03R3000F3	GaAsP on GaP	Yellow	Water Clear	585	2.1	3.0	4.2	10.5	50
L03R3000F4	GaAsP on GaP	Yellow	Yellow Clear	585	2.1	3.0	4.2	10.5	50
L04R3000F1	GaAsP on GaP	Orange	Orange Diffused	635	2.1	3.0	1.7	4.3	74
L04R3000F2	GaAsP on GaP	Orange	White Diffused	635	2.1	3.0	1.7	4.3	74
L04R3000F3	GaAsP on GaP	Orange	Water Clear	635	2.1	3.0	5.8	14.6	50
L04R3000F4	GaAsP on GaP	Orange	Orange Clear	635	2.1	3.0	5.8	14.6	50
L4FR3000F1	GaAsP on GaP	Hi-Eff. Red	Red Diffused	635	2.1	3.0	1.7	4.3	74
L4RR3000F4	GaAsP on GaP	Hi-Eff. Red	Red Clear	635	2.1	3.0	5.8	14.6	50
L05R3000F1	GaP	Red	Red Diffused	700	2.1	3.0	0.3	0.8	74
L05R3000F2	GaP	Red	White Diffused	700	2.1	3.0	0.3	0.8	74
L05R3000F3	GaP	Red	Water Clear	700	2.1	3.0	1.1	2.7	50
L05R3000F4	GaP	Red	Red Clear	700	2.1	3.0	1.1	2.7	50
L08R3000F1	GaAsP on GaP	Amber	Amber Diffused	610	2.1	3.0	5.8	9.7	74


Package Dimensions

Radiation Pattern

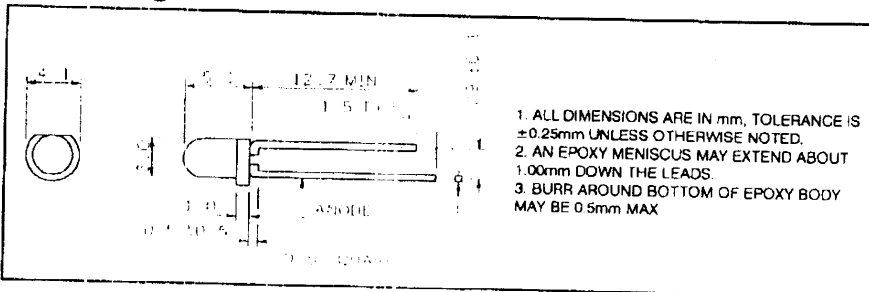


L04R3000F1	GaAsP on GaP	Orange	Orange Diffused	635	2.1	3.0	1.7	4.3	74
L04R3000F2	GaAsP on GaP	Orange	White Diffused	635	2.1	3.0	1.7	4.3	74
L04R3000F3	GaAsP on GaP	Orange	Water Clear	635	2.1	3.0	5.8	14.6	50
L04R3000F4	GaAsP on GaP	Orange	Orange Clear	635	2.1	3.0	5.8	14.6	50
L4RR3000F1	GaAsP on GaP	Hi-Eff. Red	Red Diffused	635	2.1	3.0	1.7	4.3	74
L4RR3000F4	GaAsP on GaP	Hi-Eff. Red	Red Clear	635	2.1	3.0	5.8	14.6	50
L05R3000F1	GaP	Red	Red Diffused	700	2.1	3.0	0.3	0.8	74
L05R3000F2	GaP	Red	White Diffused	700	2.1	3.0	0.3	0.8	74
L05R3000F3	GaP	Red	Water Clear	700	2.1	3.0	1.1	2.7	50
L05R3000F4	GaP	Red	Red Clear	700	2.1	3.0	1.1	2.7	50
L08R3000F1	GaAsP on GaP	Amber	Amber Diffused	610	2.1	3.0	5.8	9.7	74

Package Dimensions

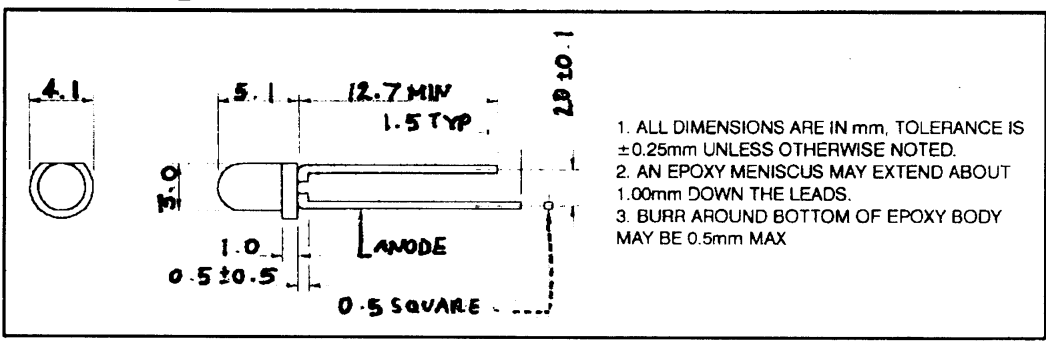

Radiation Pattern

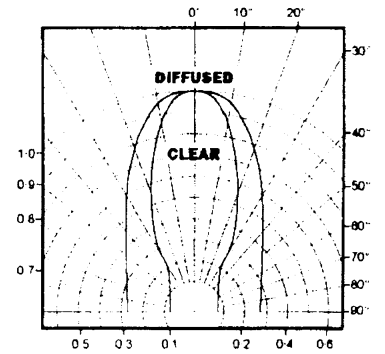

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

LR3000F.p65 Issue 3 16

ATTN: DEVINDER REGARDS: SUSAN