

# Two-color chip LEDs with reflectors


## SML-020 Series

The SML-020 series are two-color, high luminance chip LEDs with reflectors. Two-color chips are built into a single package. These LEDs are compact and leadless to allow a high mounting density.

### ●Features

- 1) Reflectors are used to achieve a high luminance.
- 2) Two-color emission, rectangular and leadless (3×2.5 mm).
- 3) Can be mounted by automatic mounting.
- 4) Available on tape

### ●External dimensions (Units : mm)

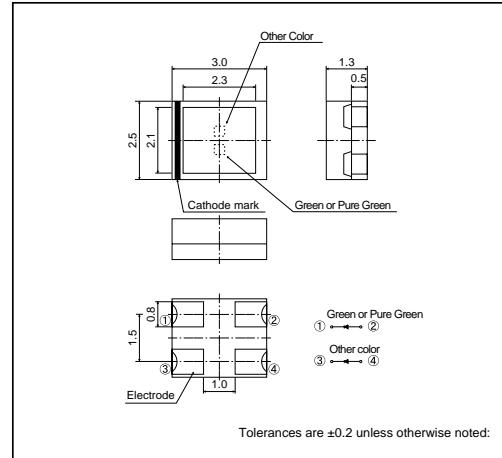

### ●Selection guide

Emitting color Lens	Red Green	Orange Green	Yellow Green	Orange Pure Green
Transparent clear	SML-020MVT SML-020MLT	SML-020MDT	SML-020MYT	SML-020PDT

### ●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits					Unit
		MLT	MVT	MDT	MYT	PDT	
Power dissipation	P <sub>D</sub>	60	↔	↔	↔	↔	mW/chip
Forward current	I <sub>F</sub> Other Color I <sub>F</sub> Green	30 25	25	↔	↔	↔	mA
Peak forward current	I <sub>FP</sub> Other Color I <sub>FP</sub> Green	75 60	60	↔	↔	↔	mA*
Reverse voltage	V <sub>R</sub>	4	↔	↔	↔	↔	V
Operating temperature	T <sub>opr</sub>	-30~+85	↔	↔	↔	↔	°C
Storage temperature	T <sub>stg</sub>	-40~+85	↔	↔	↔	↔	°C

\* Pulse width 1ms Duty 1 / 5

## Light Emitting Diodes

●Electrical and optical characteristics ( $T_a=25^\circ C$ )

Type	Parameter	Color	Forward voltage		Reverse current		Luminous intensity		Peak wavelength		Spectral line half width	
			V <sub>F</sub> (V)		Cond.	I <sub>R</sub> (mA)	Cond.	I <sub>V</sub> (mcd)	Cond.	I <sub>P</sub> (nm)	Cond.	Dl (nm)
			Typ.	Max.	I <sub>F</sub> (mA)	Max.	V <sub>R</sub> (V)	Min.	Typ.	I <sub>F</sub> (mA)	Typ.	Typ.
SML-020MVT	V	Red	2.0	2.8		20	100	3.6	6.3	650		40
	M	Green	2.2	2.8				9.0	20	570		40
SML-020MLT	L	Red	1.75	2.5		20	100	9.0	16	660		25
	M	Green	2.2	2.8				9.0	20	570		40
SML-020MDT	D	Orange	2.0	2.8		4	20	5.6	10	610	20	40
	M	Green	2.2	2.8				9.0	20	570		40
SML-020MYT	Y	Yellow	2.1	2.8			20	3.6	6.3	585		40
	M	Green	2.2	2.8				9.0	20	570		40
SML-020PDT	D	Orange	2.0	2.8		20	100	5.6	10	610		40
	P	Pure Green	2.2	2.8				2.2	4.0	555		40

## ●Directional pattern

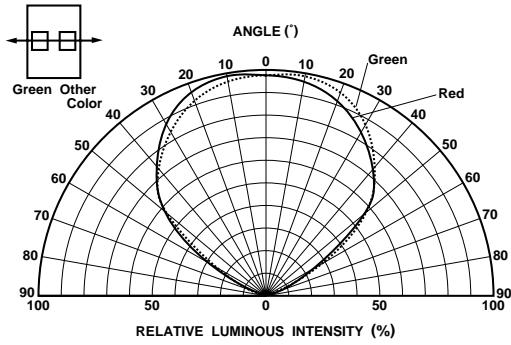


Fig. 1 Directional pattern (1)

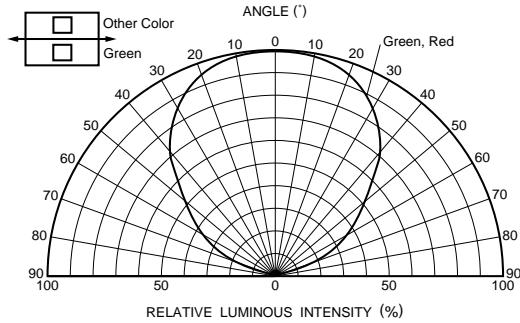


Fig. 2 Directional pattern (2)

## ●Electrical characteristics1 (SML-020MVT)




Fig. 3 Forward current vs. forward voltage




Fig. 4 Luminous intensity vs. case temperature

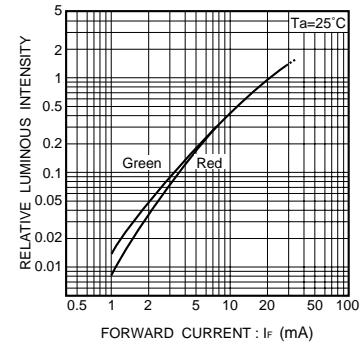


Fig. 5 Luminous intensity vs. forward current

## Light Emitting Diodes

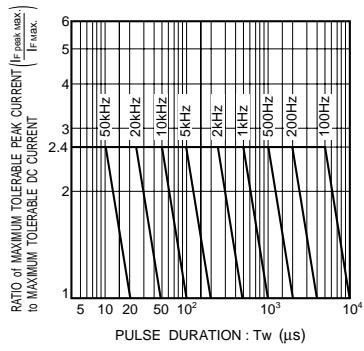


Fig. 6 Maximum tolerable peak current vs. pulse duration

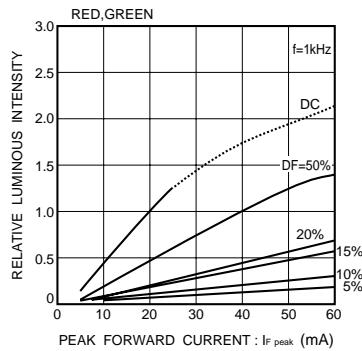


Fig. 7 Luminous intensity vs. peak forward current

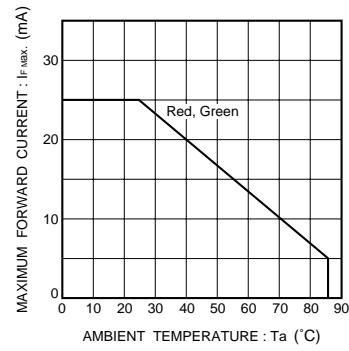


Fig. 8 Maximum forward current vs. ambient temperature

### ●Electrical characteristics2 (SML-020MLT)

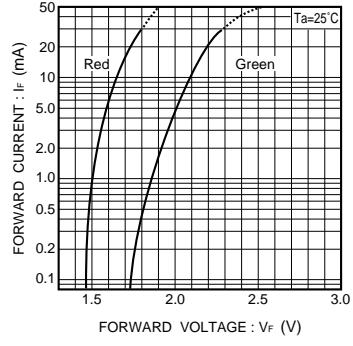


Fig. 9 Forward current vs. forward voltage




Fig. 10 Luminous intensity vs. case temperature




Fig. 11 Luminous intensity vs. forward current

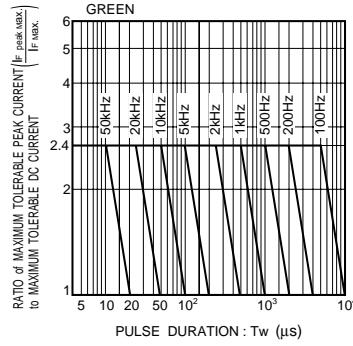


Fig. 12 Maximum tolerable peak current vs. pulse duration

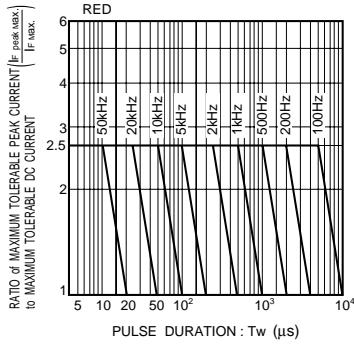


Fig. 13 Maximum tolerable peak current vs. pulse duration

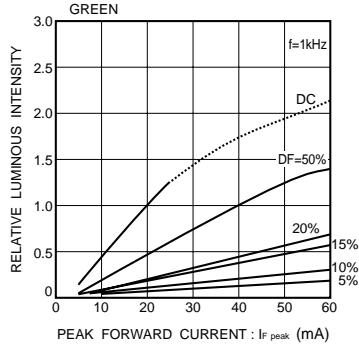


Fig. 14 Luminous intensity vs. peak forward current

## Light Emitting Diodes

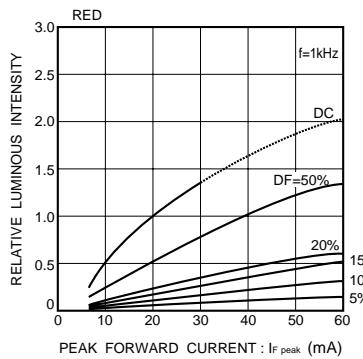


Fig. 15 Luminous intensity vs.  
peak forward current

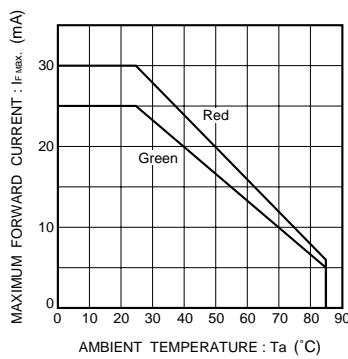


Fig. 16 Maximum forward current  
vs. ambient temperature

### ●Electrical characteristics3 (SML-020MDT)

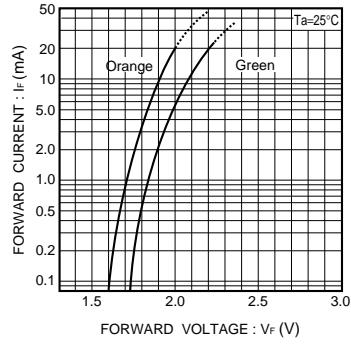


Fig. 17 Forward current  
vs. forward voltage




Fig. 18 Luminous intensity vs.  
case temperature

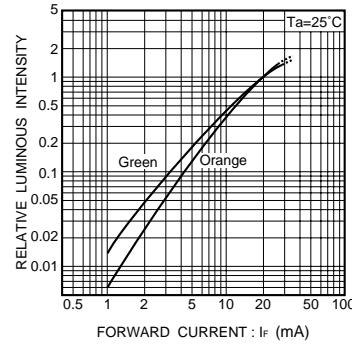


Fig. 19 Luminous intensity vs.  
forward current

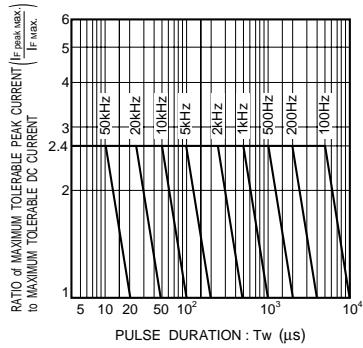


Fig. 20 Maximum tolerable peak current  
vs. pulse duration

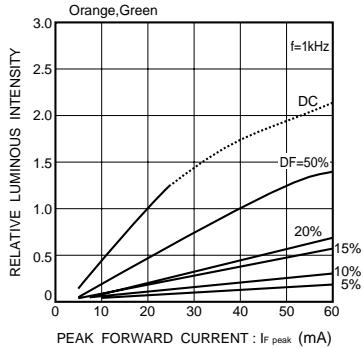


Fig. 21 Luminous intensity vs.  
peak forward current




Fig. 22 Maximum forward current  
vs. ambient temperature

## Light Emitting Diodes

### ●Electrical characteristics4 (SML-020MYT)

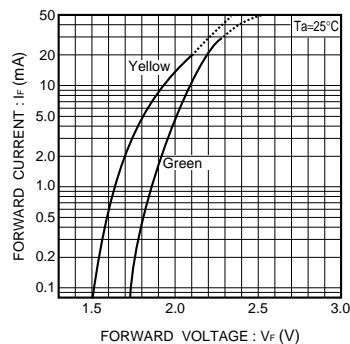


Fig. 23 Forward current  
vs. forward voltage




Fig. 24 Luminous intensity vs.  
case temperature

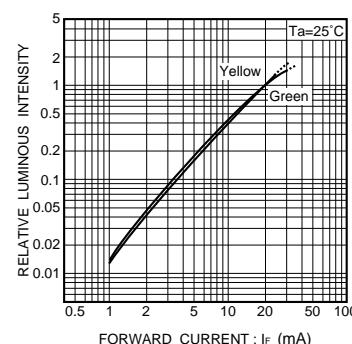


Fig. 25 Luminous intensity vs.  
forward current

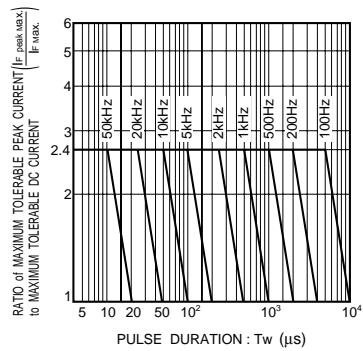


Fig. 26 Maximum tolerable peak current  
vs. pulse duration

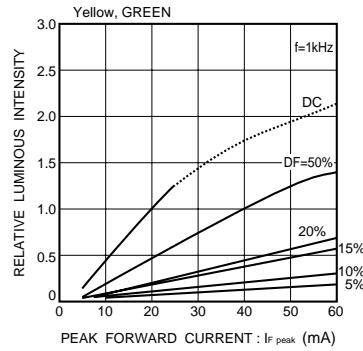


Fig. 27 Luminous intensity vs.  
peak forward current

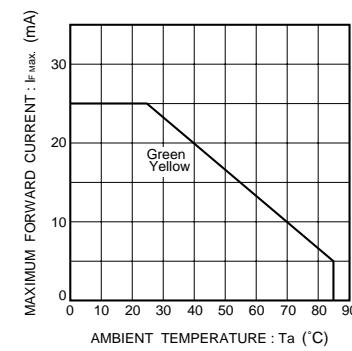


Fig. 28 Maximum forward current  
vs. ambient temperature

### ●Electrical characteristics5 (SML-020PDT)

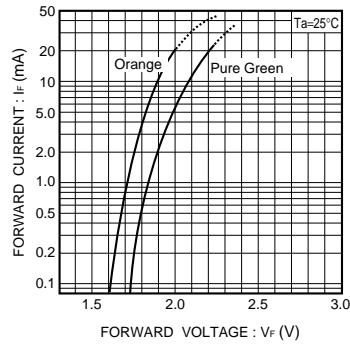


Fig. 29 Forward current  
vs. forward voltage




Fig. 30 Luminous intensity vs.  
case temperature

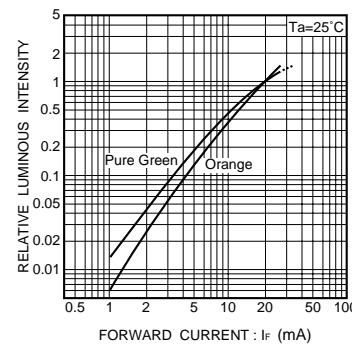


Fig. 31 Luminous intensity vs.  
forward current

## Light Emitting Diodes

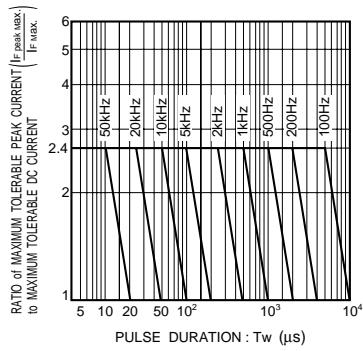


Fig. 32 Maximum tolerable peak current vs. pulse duration

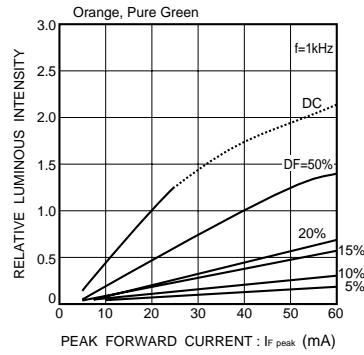


Fig. 33 Luminous intensity vs. peak forward current

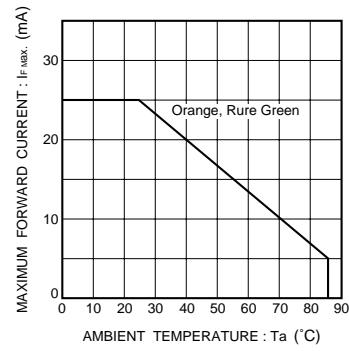


Fig. 34 Maximum forward current vs. ambient temperature

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.