






- **Compact design**
- **Double insulated**
- **Integrated thermostat or hygrostat**

The compact high performance fan heater prevents formation of condensation and provides an evenly distributed interior air temperature in enclosures with electric/electronic components. The plastic enclosure provides double insulation and acts as protection against contact. The fan heater is available with integrated thermostat or pre-set hygrostat for temperature or humidity control. The CR 030 was designed as a stationary unit for the bottom of the enclosure. For wall fixing the fan heater CR 130 is recommended.




Technical Data

Heating element	high performance cartridge
Temperature safety cut-out	to protect against overheating in case of fan failure
Heater body	extruded aluminium profile
Axial fan, ball bearing	airflow 160m ³ /h, free flow
	service life 50,000h at 25°C (77°F)
Casing	plastic according to UL94 V-0, black
Connection	2-pole max. 2.5mm ² , clamping screw with strain relief, max. torque 0.8Nm
Mounting	screw fixing (M5)
Fitting position	horizontal
Operating/Storage temperature	0 to +60 °C (+32 to +140 °F) / -45 to +70 °C (-49 to +158 °F)
Dimensions	168 x 145 x 100mm
Weight	approx. 1.40kg
Protection type / Protection class	IP20 / II (earthed)
Note	other heating capacities from 200W up available on request

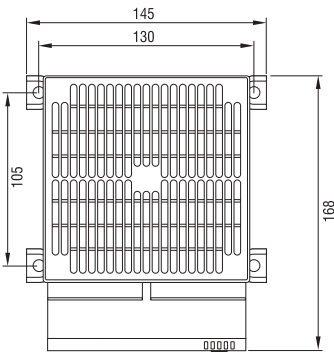

Connection diagram



Art. No.	Model	Operating voltage	Heating capacity	Setting range	Approvals
03051.0-00	Fan Heater with thermostat	230VAC, 50/60Hz	950W	0 to 60°C	VDE + UL File No. E234324
03051.0-02	Fan Heater with hygrostat	230VAC, 50/60Hz	950W	65% RH, factory-set	VDE + UL File No. E234324
03051.9-00	Fan Heater with thermostat	120VAC, 50/60Hz	700W	0 to 60°C	UL File No. E234324
03051.9-02	Fan Heater with hygrostat	120VAC, 50/60Hz	700W	65% RH, factory-set	UL File No. E234324