


Metric Countersunk head machine screws - PoziDriv®

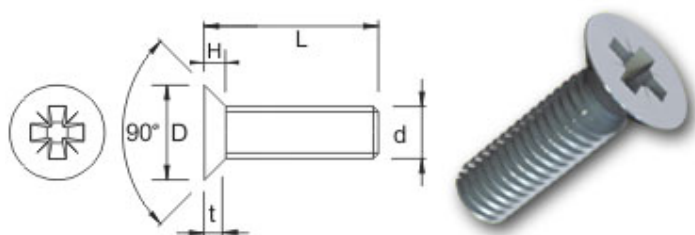

DIN 965
BS 4183
ISO 7046

Materials/Finishes:

Steel 4.8/Zinc & clear
Stainless steel/Self colour
Brass/Self colour

Dimensions

Thread (d)	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8
H max (BS/DIN)	0.96	1.2	1.5	1.65	1.93	2.2	2.5	3	4.5
H max (ISO)	-	1.2	1.6	1.65	2.35	2.7	2.7	3.3	4.65
recess (BS/DIN)	0	1	1	1	2	2	2	3	4
recess (ISO)	-	0	1	1	2	2	2	3	4
D nom (BS)	-	-	5.5	6.3	7.35	8.4	10	12	16
D nom (DIN)	3.00	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5
D nom (ISO)	-	3.8	4.7	5.5	7.3	8.4	9.3	11.3	15.8

NB: Generally our preferred stock is to DIN - if dimensions are critical to your application you should check with us prior to ordering.

Preferred lengths

		Thread (d)								
		M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8
Length (L)	3	ST								
	4	ST	ST	ST A2	ST					
	5	ST	ST	ST A2	ST		ST			
	6	ST	ST	ST A2	ST A2	A2	ST A2	ST		
	8		ST	ST A2	ST A2	A2	ST A2	ST A2	ST	
	10		ST	ST A2	ST A2	A2	ST A2	ST A2	ST A2	ST
	12		ST	ST A2	ST A2	A2	ST A2	ST A2	ST A2	ST
	16		ST	ST A2	ST A2	A2	ST A2	ST A2	ST A2	ST

20			ST	ST A2	A2	ST A2	ST A2	ST A2	ST
25			ST	ST		ST A2	ST A2	ST A2	ST
30				ST		ST A2	ST A2	ST A2	ST
35				ST		ST	ST A2	ST A2	ST
40				ST		ST	ST	ST	ST
45				ST		ST	ST	ST	ST
50				ST		ST	ST	ST	ST
60						ST	ST	ST	ST
70						ST	ST	ST	ST
80						ST	ST	ST	ST
90							ST	ST	ST
100							ST	ST	ST

ST - Steel, Zinc & clear - other finishes often available
A2 - A2 Stainless steel, Self colour