

Titanis 2.4 GHz Swivel SMA Antenna

Part No. 2010B4844-01 / 2010B6090-01

Product Specification

1 Features

- Designed for 2.4 GHz applications: Bluetooth[®], Wi-Fi[®] (802.11b/g), ZigBee[®], etc.
- Antenna with a SMA male connector
- Also available as SMA reverse thread to meet FCC regulations, part 15
- High efficiency
- Supplied in bulk

2 Description

Titanis is intended for use with all 2.4 GHz applications. The antenna is fitted with a SMA male connector and a blade made of flexible material that can be rotated 360 degree.

No external matching network required.

3 Applications

- Development tools
- Test equipment
- Access points, routers, etc
- Printers



Integrated Antenna Solutions

1

Product Specification AE030054-E

4 Part number

Titanis Standard SMA - male: 2010B4844-01

Titanis Reverse thread SMA - male: 2010B6090-01

5 General data

Product name	Titanis 2.4 GHz			
Part Number	2010B4844-01 (Standard SMA – male)			
T di t i valindoi	2010B6090-01 (Reverse thread SMA - male)			
Frequency	2.4 – 2.5 GHz			
Polarization	Linear			
Operating temperature	-40 °C to +85 °C			
Impedance	50 Ω			
Weight	7.1 g			
Antenna type	Swivel external			
Dimensions	20 x 19.5 x 62.5 [mm]			


6 Electrical characteristics

	Typical performance	Conditions			
Peak gain	2.2 dBi				
Average gain	-1.0 dBi				
Average efficiency	80%	Data given for the 2.4 – 2.5 GHz frequency range			
Maximum Return Loss	-13 dB				
Maximum VSWR	1.6:1				


Integrated Antenna Solutions

7 Electrical performance

7-1 Return Loss

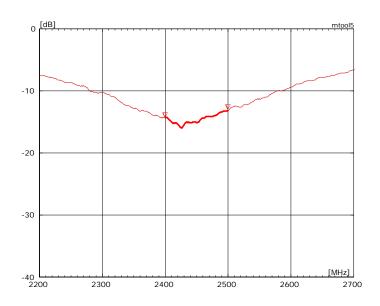


7-2 VSWR

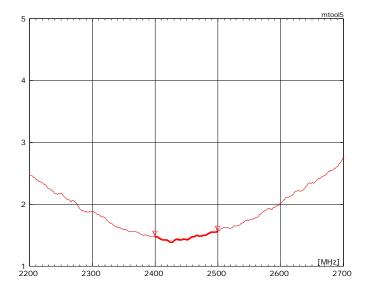

Integrated Antenna Solutions

7-3 Antenna patterns

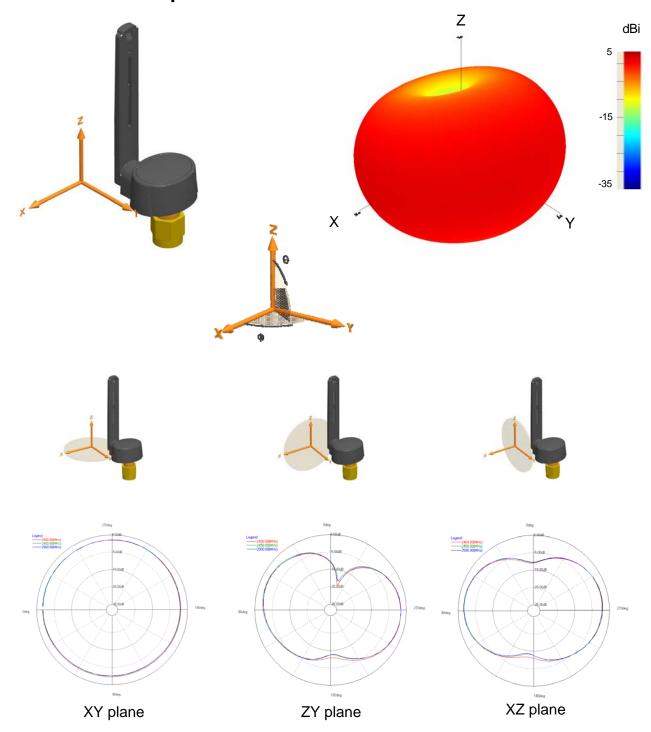


Patterns show combined polarisations

Integrated Antenna Solutions

4

Product Specification AE030054-E

8 Antenna dimensions

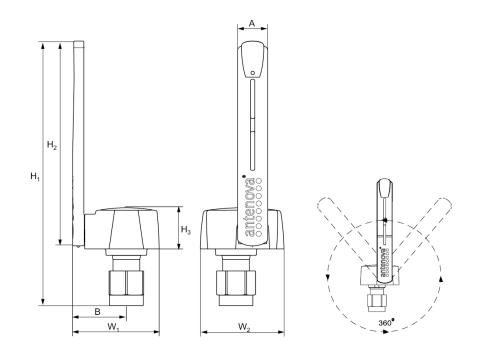

А	В	H1	H2	НЗ	W1	W2
		Height	Height	Height	Width	Width
7 ± 0.2	12.5 ± 0.5	62.5 ± 0.5	48.3 ± 0.5	9.5 ± 0.5	20 ± 0.3	19.5 ± 0.3

Dimensions in mm

9 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova's website.

Integrated Antenna Solutions

10 Packaging

10-1 Optimal storage conditions

Temperature	-10°C to 40°C	
Humidity	Less than 75% RH	
Shelf Life	48 Months	
Storage place Away from corrosive gas and direct sunlight		

10-2 Packaging information

The antennas are delivered in bulk, enclosed in plastic bags.

10-3 Bag label information



Dimensions in mm



www.antenova.com

Corporate Headquarters

Antenova Ltd. Far Field House Albert Road Stow-cum-Quy Cambridge CB25 9AR

North America Headquarters

Antenova Ltd.
Rogers Business Park
2541 Technology Drive Suite 403
Elgin, IL 60124

Nei-Hu District Taipei 11493 Taiwan, ROC

Tel:

Fax:

4F. No. 324, Sec. 1, Nei-Hu Road

+886 (0) 2 8797 8630

+886 (0) 2 8797 6890

Email: info@antenova.com

Asia Headquarters

Antenova Asia Ltd.

 Tel:
 +44 1223810600
 Tel:
 +1 (847) 551 9710

 Fax:
 +44 1223 810650
 Fax
 +1 (847) 551 9719

 Email:
 info@antenova.com
 Email:
 info@antenova.com

Copyright® 2007 Antenova Ltd. All Rights Reserved. Antenova® and RADIONOVA® are trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Integrated Antenna Solutions

7