



# AF100B00304


## BeO Flange Attenuator

**Power:** 100 Watts (CW)  
**Attenuation:** 3 dB  $\pm$  0.2 dB  
**VSWR:** 1.25:1  
**Frequency Range:** DC to 3.5 GHz  
**Substrate:** BeO




### TYPICAL PERFORMANCE

RETURN LOSS

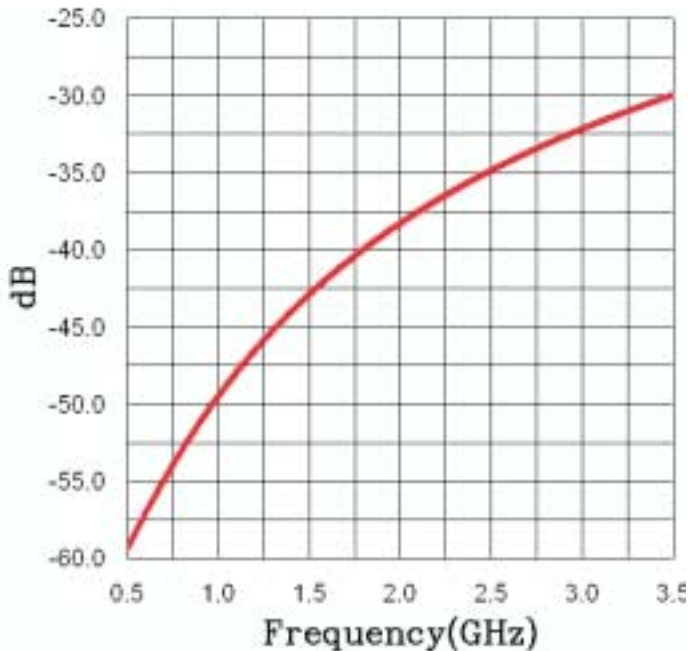

ATTENUATION

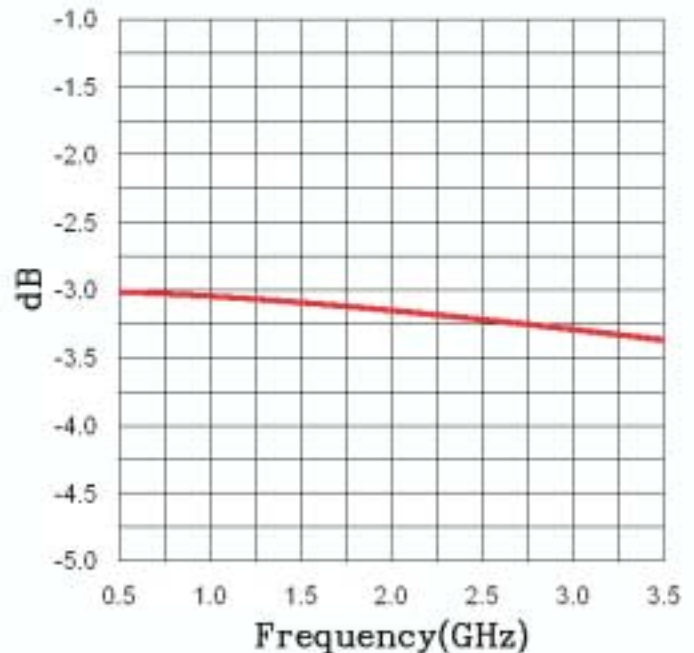


For detailed information regarding this product or sample request contact Johanson Sales



Johanson Manufacturing Corporation • 301 Rockaway Valley Road, Boonton, New Jersey 07005 • Phone 973.334.2676 • Fax 973.334.2954  
STAY TUNED • ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION • [WWW.JOHANSONMFG.COM](http://WWW.JOHANSONMFG.COM)

Nov 08

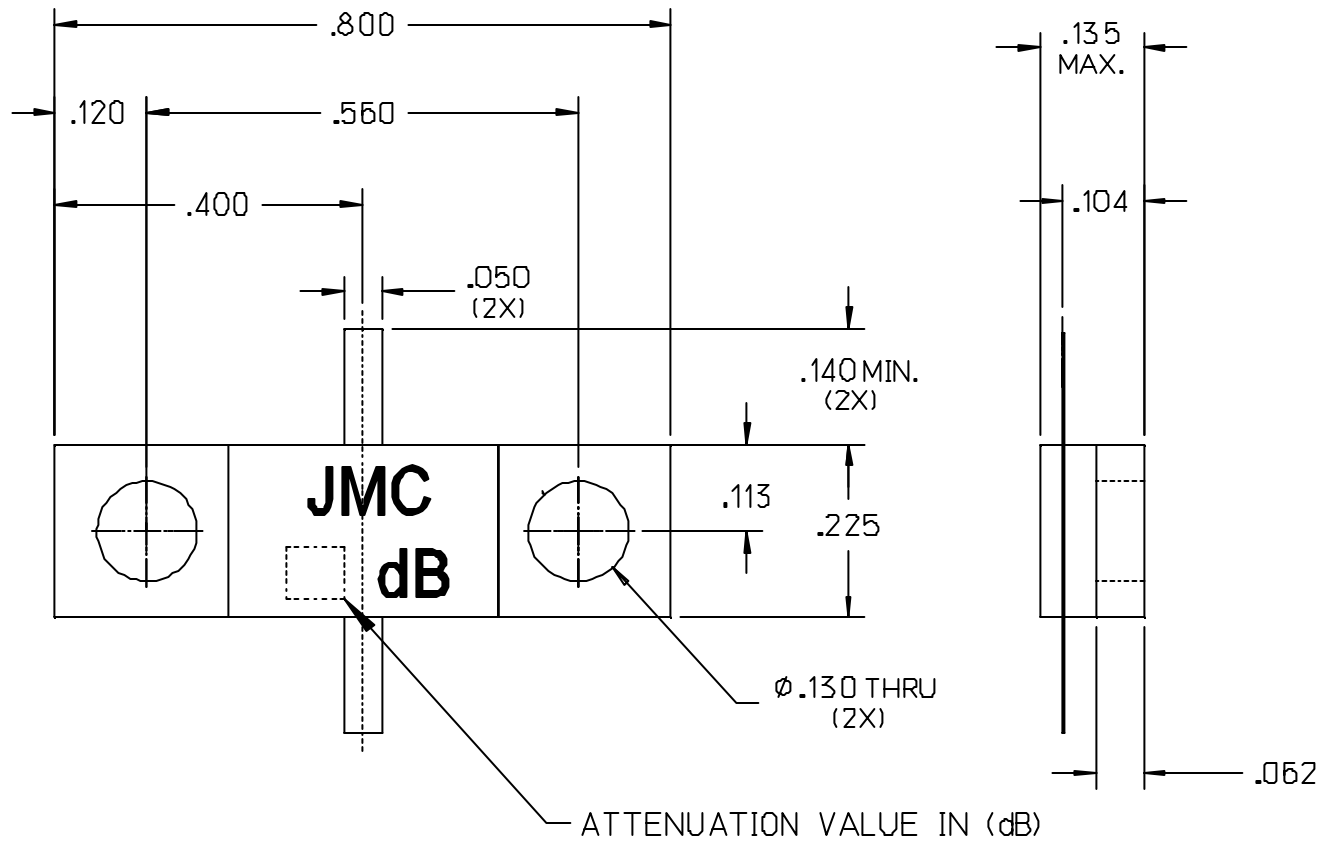

### CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE  
 USE CARE WHEN HANDLING.  
 DO NOT SCRATCH OR ABRASIVE  
 TRIM IN OPEN AREA.

For detailed information regarding this product or sample request contact Johanson Sales