


l	
PART	NO

HK-GDP02

REVISIONS								
ECN#	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Arun	07/02/11	Jagan	07/02/11	Farnell	21/02/11

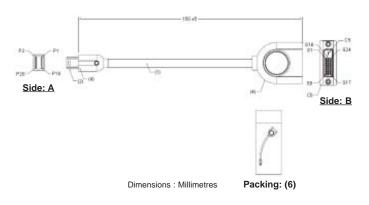

Specifications:

Cable Wiring

32AWG (7/0.08mmTCu) x 1P + D (7/0.08mmTCu) + AM x 5C + 32AWG (7/0.08mmTCu) x 5C + AD (7/0.08mmTCu) + B (16 x 7/0.12mmTCu) (Coverage 85%).

Jacket material : PVC OD: 4.8 ±0.1m.

Cable length : 0.15m. Cable colour : White.

Connector A

Mini DisplayPort 20P male solder type Insulation : White.

Contact : Brass, gold plated. : Fe, nickel plated. Shell

Connector B

DVI (24 + 1)P female solder type (with PCB) Insulation

Contact : Phosphor bronze, gold plated.

Shell : Fe, gold plated.

: Assembly, white. Over mould

Parameter Settings

Conductive resistance : 1.0Ω. Minimum insulative resistance : 10MΩ.

Hi-Pot : DC 300V/10ms, 1.5mA/I, 50Hz, 0.03s.

http://www.farnell.com http://www.newark.com

http://www.cpc.co.uk

Description

Mini DP to DVI Adaptor

Part Number Table

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

Part Number

HK-GDP02

DRAWN BY:	DATE:		
Arun	07/02/11		
CHECKED BY:	DATE:	r	
Jagan	07/02/11		
APPROVED BY:	DATE:	ŀ	
Farnell	21/02/11		
		_	

:	DRAW	ING TITLE:					
	Mini DP to DVI Adaptor - 150mm						
:	SIZE DWG NO.			ELEC	REV		
	A		XXX	HK-	GDP02_DWG	Α	
:	SCALE: NTS		U.O.M.: mm		SHEET: 1 OF 1		