




Paper Cone
Inverted rolled cloth edge
RoHS Compliant
8 ohm
2 W
88 dB

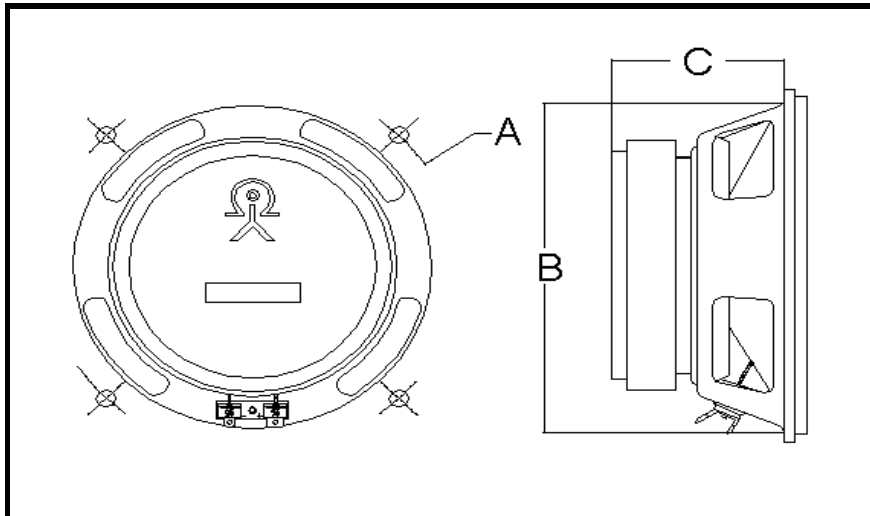

After the following tests the speaker operates normally.

- Thermal Shock Test**
-30°C±2°C/2Hrs +80°C/2Hrs 20 Cycles
- Humidity Test**
+40°C 95%RH 96Hrs
- High Temperature Test**
+85°C 240 Hrs
- Low Temperature Test**
-40°C 72 Hrs

| | |
|---------------|----|
| A (mm) | 76 |
| B (mm) | 61 |
| C (mm) | 26 |

| | |
|--------------------------------|-----|
| Magnet Dia (mm) | 45 |
| Gasket thickness (mm) | 0.7 |
| Mounting holes in pitch | 4 |

| | |
|--------------------------------|-----|
| Output S P L 1W @ 1m | 88 |
| Nominal impedance Ω | 8 |
| Rated Power input (W) | 2 |
| Speaker weight (g) | 133 |
| Voice coil dia (mm) | 15 |
| SPECIFICATION | |

| | | |
|---------------------|-------|-----------|
| FS | 255 | Hz |
| RE | 6.5 | Ohm |
| RES | 18 | Ohm |
| QMS | 5.8 | |
| QES | 2.2 | |
| QTS | 2.119 | |
| MMs | 0.4 | grams |
| CMs | 108 | µm/Newton |
| BL | 1.65 | Tesla-m |
| THIELE SMALL | | |

