

EPITOME® IN-WALL STEREO SPEAKERS

Exclusive "Easy-Mount"

Mounting of our in-wall speakers is a snap with Epitome's exclusive, "Easy Mount" system. After speaker wires have been connected, just insert the speaker in the wall and tighten each of four (4) screws with a hand screwdriver. It's that easy! The tabs rotate behind the wall, "capturing" the speaker and drawing it tight to the wall. Simple, fast and easy...and...all without the chance of dropping or losing any loose hardware.

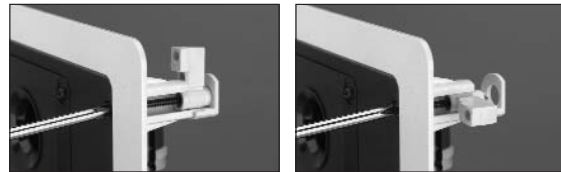


Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5




Fig. 6

In-Wall Speakers

Retail Part No.	Figure Number	Watts Max/RMS	Frequency Response	Woofer/Magnet Wt.	Tweeter	Impedance	Weight lbs.	Dimensions		
								H	W	D
30-4050	1	60/30	50-20 kHz	5.25"/10 oz.	1" M SD	8 Ohms	3.31	7.5"	11"	2.75"
30-4060	2	70/35	40-20 kHz	6.5"/10 oz.	1" M SD	8 Ohms	3.62	12"	8.62"	3.25"
30-4062	3	100/50	40-20 kHz	6.5"/10 oz.	1" M SD	8 Ohms	3.52	12"	8.62"	3.25"
30-4080	2	100/50	35-20 kHz	8.0"/13oz.	1" M SD	8 Ohms	4.67	14.12"	10"	3.5"
30-4081	4	100/50	35-20 kHz	8.0"/20 oz.	1" M SD	8 Ohms	4.19	14.5"	8.62"	3.25"
30-4082	3	120/60	35-20 kHz	8.0"/20 oz.	1" M SD	8 Ohms	4.63	14.12"	10"	3.5"
30-4083	5	100/50	30-600 Hz	8.0"/26 oz.	N/A	8 Ohms	7.32	14.12"	10"	4.25"
30-4051	6	60/30	70-20 kHz	5.25"/8 oz.	50" M SD	8 Ohms	1.98	7.5"	11"	2.75"
30-4063	6	80/40	65-20 kHz	6.5"/11 oz.	.50" M SD	8 Ohms	2.56	9.125"dia.x3.125"		

EPITOME® STAND ALONE SPEAKERS



Fig. 7



Fig. 8



Fig. 9



Fig. 10



Fig. 11

Stand Alone Speakers

Retail Part No.	Figure Number	Description	Watts Max/RMS	Frequency Response	Tweeter	Impedance	Dimensions/Wt.			Color	
							H	W	D	lbs.	
30-3532	7	Center Channel Speaker	100/50	150Hz-20kHz	1" SILK	8 Ohms	5 3/4"	14 1/2"	5 1/4"	N/A	Black
30-3533	7	Center Channel Speaker	100/50	150Hz-20kHz	1" SILK	8 Ohms	5 3/4"	14 1/2"	5 1/4"	N/A	White
30-3581	8	Bookshelf Speakers	120/(N/A)	250 Hz-20 kHz	2 .5" CMD	8 Ohms	7"	4"	4"	N/A	Black
30-3582	8	Bookshelf Speakers	120/(N/A)	250 Hz-20 kHz	2 .5" CMD	8 Ohms	7"	4"	4"	N/A	White
30-3511	9	Indoor/Outdoor Speakers	80/(N/A)	50 HZ-20 kHz	.5" H	8 Ohms	8 1/2"	5 5/8"	4 3/4"	N/A	White
30-4090	10	Subwoofer	150/70	31.3-206 Hz	N/A	8 Ohms	14 7/8"	11 3/4"	15 3/8"	25	Black
30-3561	11	Shielded Indoor/Outdoor	80/(N/A)	120 Hz-18 kHz	3/4" PD	8 Ohms	7 1/4"	4 1/2"	4 1/2"	N/A	Black
30-3562	11	Shielded Indoor/Outdoor	80/(N/A)	120 Hz-18 kHz	3/4" PD	8 Ohms	7 1/4"	4 1/2"	4 1/2"	N/A	White

ABBREVIATIONS: M-MYLAR; H-HORN; PD-PIEZO DOME; SD-SOFT DOME; CMD-COAXIAL MYLAR DOME