



# Permanent light element 641

(provisional technical data sheet)

WERMA Signaltechnik GmbH + Co.  
Dürbheimer Straße 15  
D-78604 Rietheim-Weilheim  
Phone 0049/7424/9557-0  
Fax 0049/7424/9557-44

### Electrical specifications:

Operating voltage:  $U_{nenn} = \text{max. } 250\text{V}$   
Bulb:  $\text{max. } 7\text{W}$   
Working life: depending on the bulb used

### Order-No.:

641 X00 00 Permanent light element  
X 1=red 2=green 3=yellow 4=clear 5=blue

### Mechanical specifications:


Material: Polycarbonate  
Socket: B15d (Bayonet)  
Seal: premounted with each element

### Further specifications:

Mass: ca. 55g  
Temperature:  $t_a -20^\circ\text{C}$  bis  $+60^\circ\text{C}$   
Protection rating: IP 65 when mounted or with cap

Regulations: Conform to current EC-regulations.  
UL-listed.

All specifications refer to  $U_{nenn}$  and room temperature!

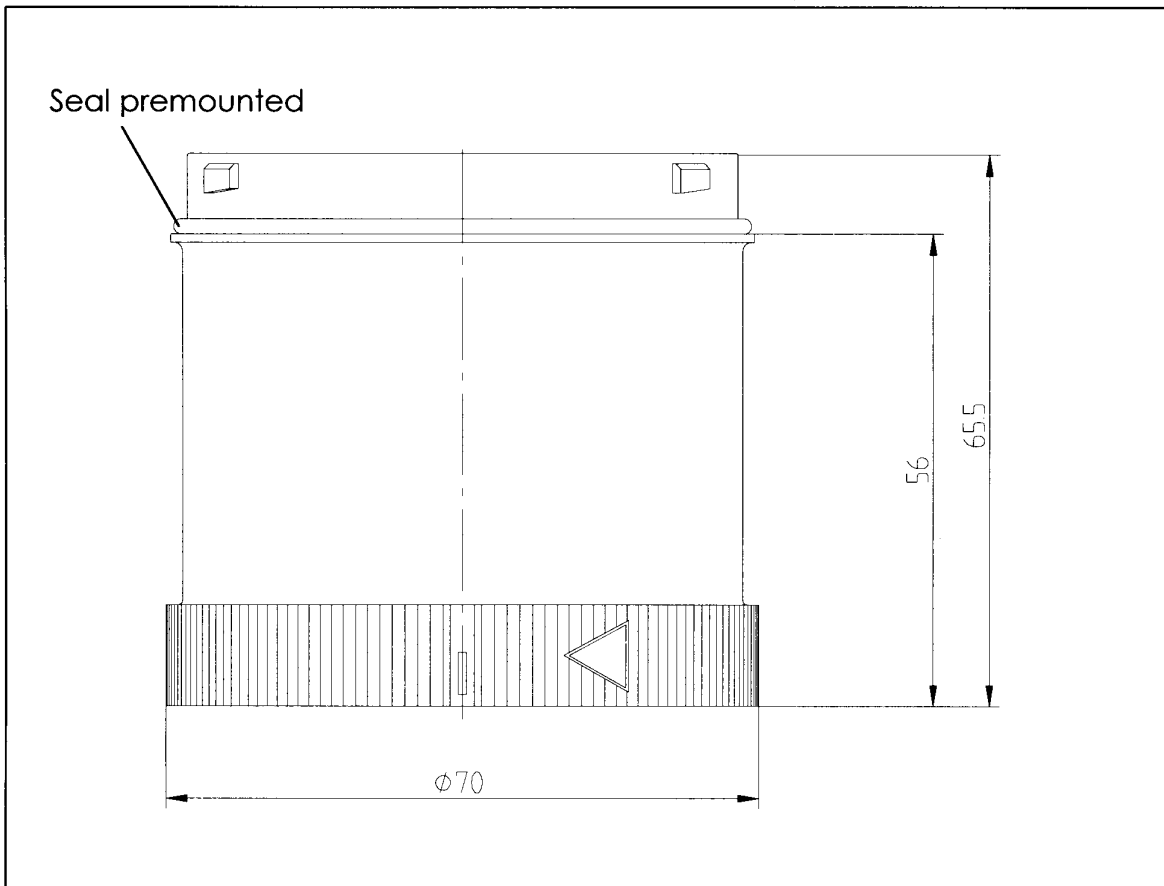

	Drawn up	proved	released	Data-sheet-No.
Name	E. Rudischhauser	<i>ru</i>	<i>RC</i>	000 641 501
Date	2001-11-06	2001-11-06	2001-11-09	Page 1 of 1