



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

| DCP # | REV | DESCRIPTION | DRAWN | DATE   | CHECKD | DATE    | APPRVD | DATE    |
|-------|-----|-------------|-------|--------|--------|---------|--------|---------|
| 1355  | A   | RELEASED    | JWM   | 1/2/04 | HO     | 1/14/04 | JC     | 1/26/04 |

**NOTES:**

IEC61010 Ratings

1000V CAT III

6 Amps

Reinforced or Double Insulation




Materials:

Body - Polyimide (Nylon) and Santoprene

Tip - Brass, Nickel Plated

Internal Resistance: <50 milliohms

Temperature: -20°C to 80°C

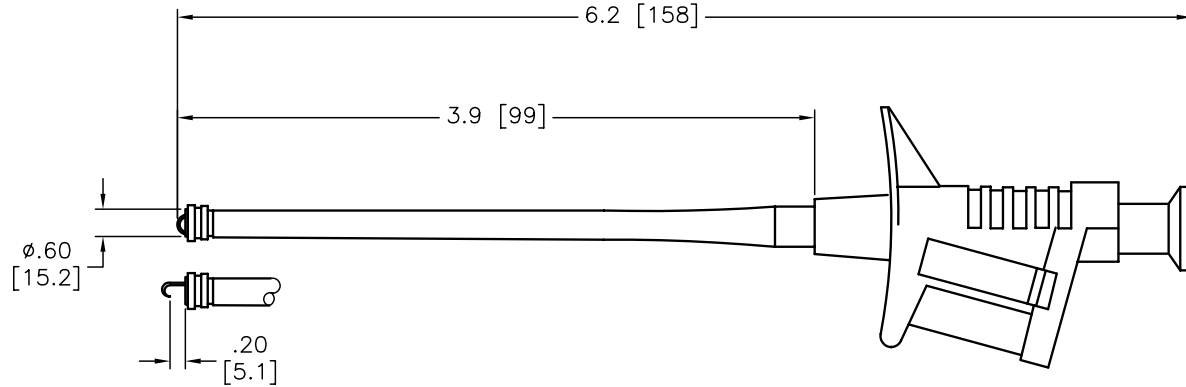

Hook style contact can fit terminals up to .20 [5mm] and can be rotated for easy connection. Flexible shaft is bendable to ±90°.

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

|               |         |
|---------------|---------|
| DRAWN BY:     | DATE:   |
| Jeff McVicker | 1/2/04  |
| CHECKED BY:   | DATE:   |
| Hisham Odish  | 1/14/04 |
| APPROVED BY:  | DATE:   |
| John Cole     | 1/26/04 |

DRAWING TITLE:

Hook Style Flexible Clip w/4mm Safety Jack, Red

|        |                     |                 |     |
|--------|---------------------|-----------------|-----|
| SIZE   | DWG. NO.            | ELECTRONIC FILE | REV |
| A      | 76-064              | 16F7731.dwg     | A   |
| SCALE: | U.O.M.: INCHES [mm] | SHEET: 1 OF 1   |     |
| NTS    |                     |                 |     |