




SPC  
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.  
SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			ASH	11-08-10	JAG	11-08-10	XXX	27-08-10

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

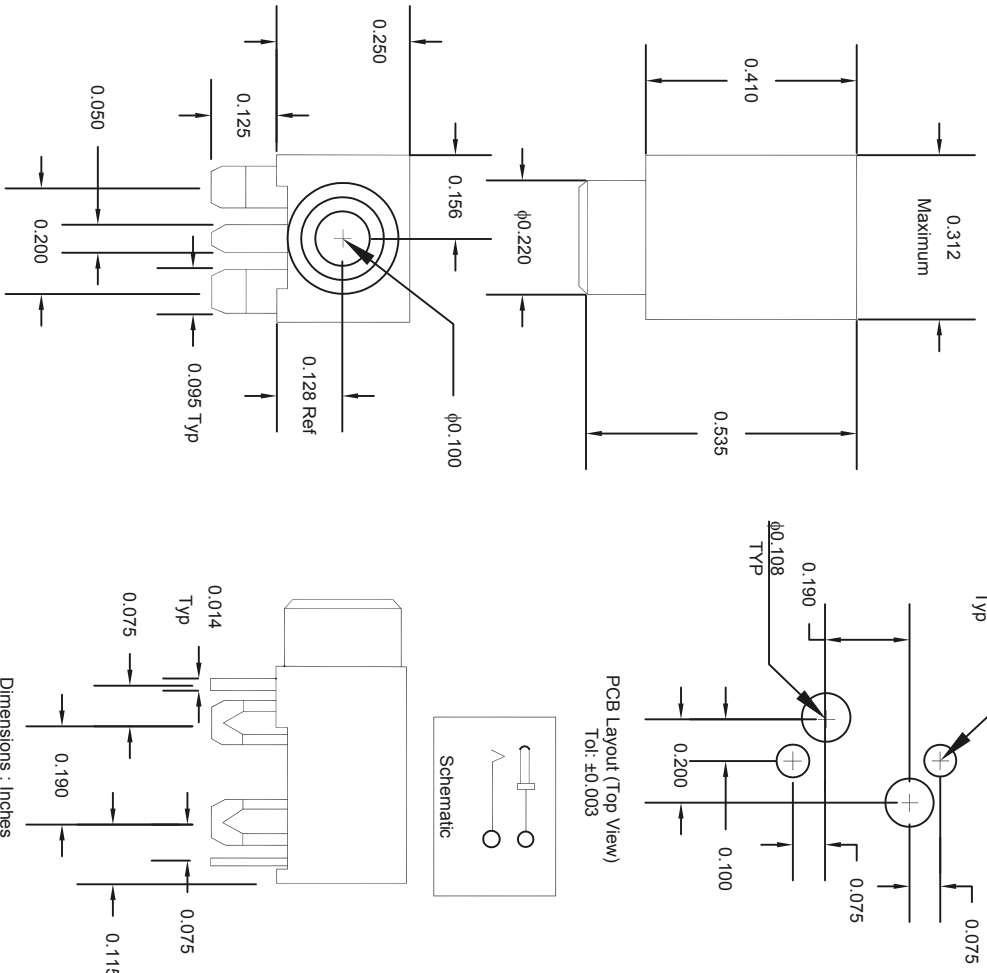

PCB Layout (Top View)  
Tol: ±0.003

Specifications:

Insulation Resistance: 8000 Megohms minimum  
Retention Force: 0.2Kg  
Body: PBT, UL94V-0, 30% Glass-Black  
Contacts/Leads: Beryllium Copper, 100 Microriches Tin Plated

Part Number Table

Description	Part Number
Tip Jack	SPC21375

Dimensions : Inches

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

Tip Jack

ELECTRONIC FILE

REV

DRAWN BY:	ASH	DATE:	11-08-10
CHECKED BY:	JAG	DATE:	19-08-10
APPROVED BY:	XXX	DATE:	27-08-10

SIZE	DWG. NO.
XXX	XXX

SCALE:	NTS	U.O.M.: INCHES [mm]

SHEET:	1	OF	1
--------	---	----	---

84N1193

A