


**Laboratory-General Use
Combination pH Electrodes**

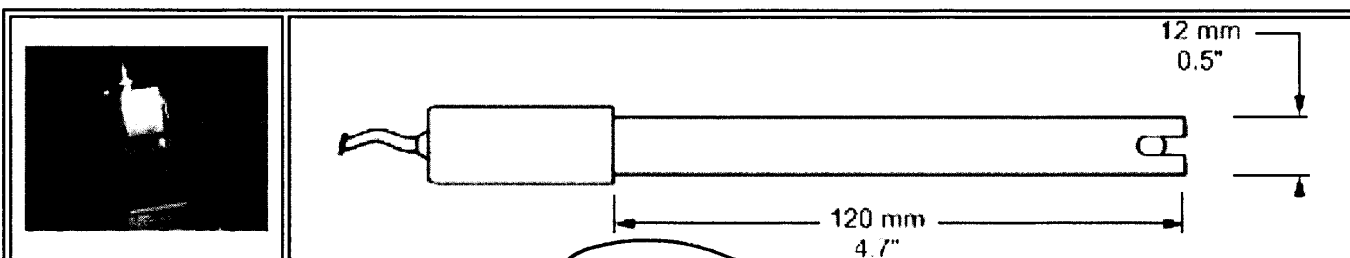

| | | | | | |
|-------------------------|------------------|-------------------|-----------------|-----------------|-----------------|
| Code | | HI 1230B | HI 1230D | HI 1230U | HI 1210S |
| Body | | Ultem® | | | |
| Reference | Junction | double | | | |
| | Cell | gel | | | |
| Junction | Type | 1 Ceramic Ø1.2 mm | | | |
| | Flow Rate | 15-20 µl/H | | | |
| Tip | Shape | Sphere | | | |
| | Dimension | Ø7.5 mm | | | |
| Plug | Type | BNC | DIN | US Standard | Screw Cap |
| | Cable | 1 m, 3mm dia. | | | NA |
| Cable | | Coaxial | | | NA |
| Temp range °C | | 0/+80 | | | |
| Pressure PSI/BAR | | 21.75/1.5 | | | |

Note: Double junction refillable electrodes use HI 7082 3.5M KCl solution

Ultem® is a registered Trademark of General Electrics Company