



REVISIONS


DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			Sha	06-08-10	MRD	14-08-10	XXX	21-08-10



Features:

1. Large 5 digit LCD display with function annunciator
2. One second response time at distances from 2" to 6"
3. Stores Last/Min./Max. readings
4. Includes 23" reflective tape, carrying case and owner's manual
5. One year limited warranty
6. Requires four 1.5V "AA" batteries not included

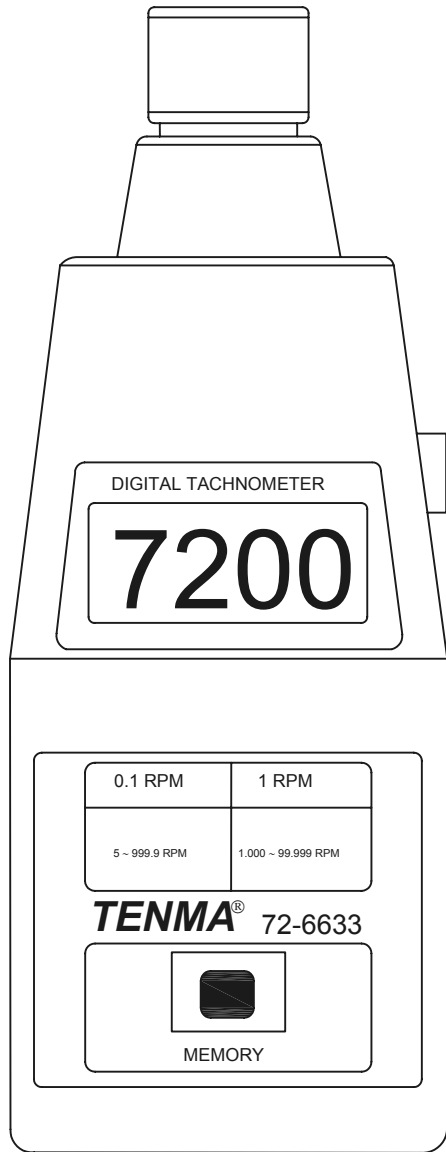

Specification

Range	5 to 99,999 RPM
Resolution	0.5 to 999.9 RPM: 0.1 RPM Over 1,000 RPM: 1 RPM
Accuracy	± (0.05% + 1 digit)
Sampling Time	1 Sec. (over 60 RPM)
Range Selection	Automatic
Detecting Distance	50 TO 150mm (2-6 inches) Typical Max. 300mm (12") depending Upon ambient light
Time Base	Quartz Crystal, 4.194 MHz
Size	190 x 72 x 37mm (7.5 x 2.8 x 1.5 inch)
Weight	235g (.52lb) Including batteries
Operating Temp.	0 TO 50°C (32°F TO 122°F)
Memory	Last, Maximum, & Minimum Values

Part Number Table

Description	Part Number
Digital Photo Tachometer	72-6628 CALIBRATED

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Sha	06-08-10	Digital Photo Tachometer			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	MRD	14-08-10	A	XXX	50N1386	A
	APPROVED BY:	DATE:	SCALE:	U.O.M.:	SHEET:	
	XXX	21-08-10	NTS	INCHES [mm]	1 OF 1	

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.