

**NTE**<sup>®</sup>  
ELECTRONICS, INC.

**ECG**<sup>®</sup>

**NEW!**

# WIRELESS INSPECTION CAMERA

**Extend your vision & reach!**



**With Removable  
Color LCD Monitor**



**Detachable Monitor  
Adds Convenience!**

\*Transmission distance = 30 Feet

**WIC-1™**

## Extend your vision & reach!

The new ECG Wireless Inspection Camera allows for easy visual inspections in hard-to-reach areas, even in total darkness or underwater, with 2 super bright LEDs! Lightweight, handheld design helps you easily find, diagnose, and solve problems.

[www.WirelessInspectionCamera.com](http://www.WirelessInspectionCamera.com)


## Applications:

- HVAC Inspection
- Automotive Inspection
- Cable Routing
- Electrical
- General Contracting
- Home Theater Installation
- Plumbing Inspection
- Much more!


## Features:

- 2.4" Removable Color LCD Monitor
- Waterproof Camera & Shaft (IP67)
- Video Out for Recording
- Includes Mirror, Hook, & Magnet Tips
- One Year Warranty
- FCC Compliant

## Camera, Shaft, and Base Unit

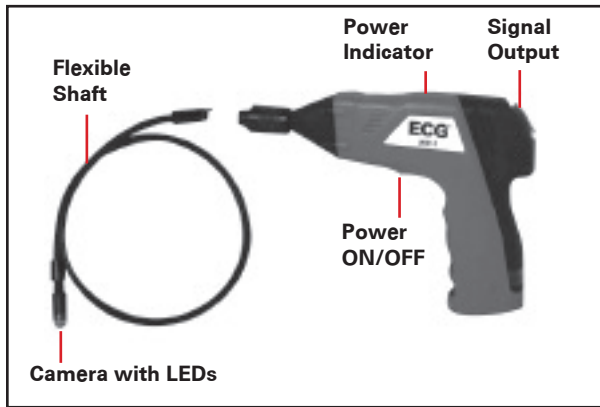

## LCD Monitor

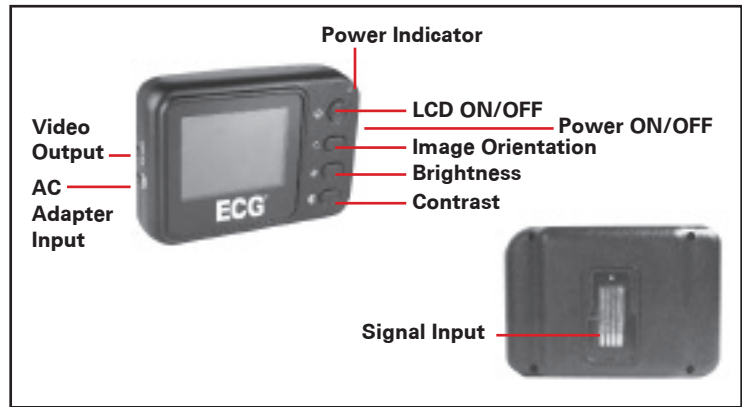

## Specifications

CAMERA	
Imaging Sensor:	CMOS
Total Pixels:	712 x 486
Horizontal View Angle:	50°
Transmission Frequency:	2468 MHz
Modulation Type:	FM
Bandwidth:	18 MHz
Power Supply:	4 x AA Batteries
Weight (With Shaft):	1.17 lbs.
Operating Temperature:	14°F ~ 122°F
Operating Humidity:	15 ~ 85% RH
Diameter (mm/inches)	15.9 / 0.63

MONITOR	
Screen Type:	2.36" LCD
Effective Pixels:	480 x 240
Video System:	NTSC
Transmission Frequency:	2468 MHz
Exterior Supply Voltage:	8V - 36V <sub>DC</sub>
Consumption Current (Max.):	450 mA
Video Output Level:	0.9 - 1.3V <sub>P-P</sub> @ 75 ohm
Dimensions (W x D x H) (inches):	3.94 x 2.76 x 1.18
Weight:	0.31 lbs.
Operating Temperature:	14°F ~ 122°F
Operating Humidity:	15 ~ 85% RH

\* All specifications are subject to change without prior notice

## Accessories Available:

**WIC-10:**  
New Smaller 9mm  
Camera Head



**WIC-4:**  
3.28 Ft. Extension Shaft  
(Add up to Three!)

