


**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
15.000000MHz

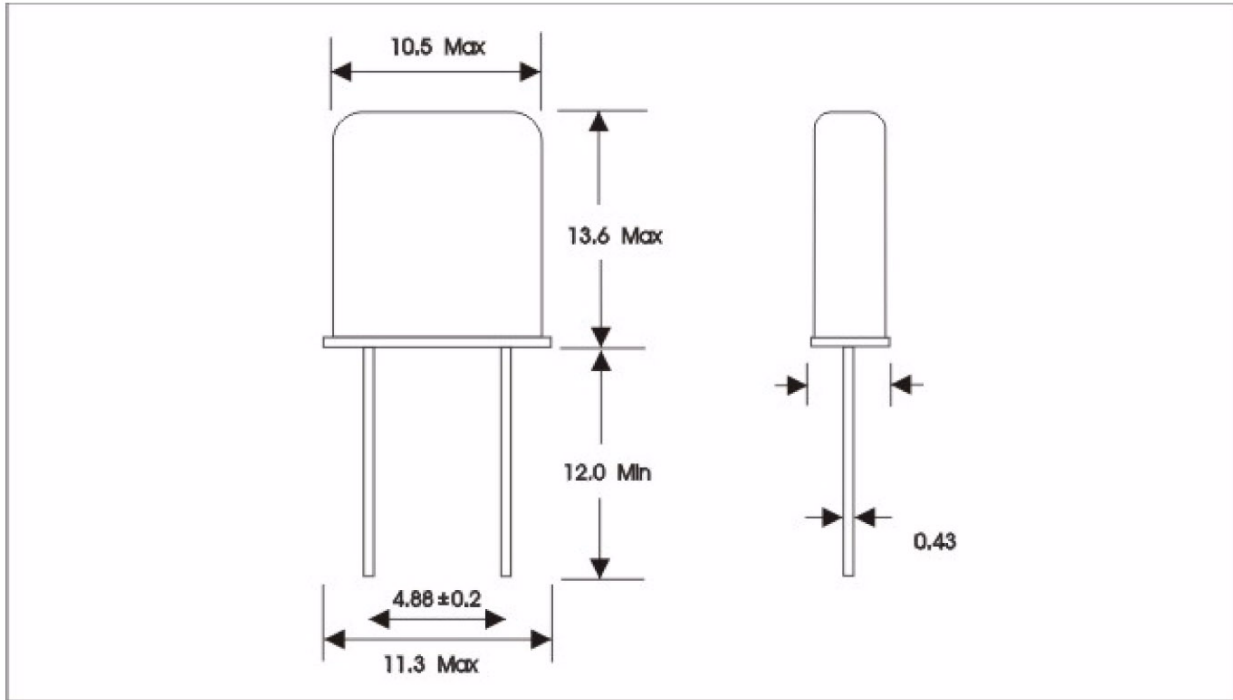

Holder Style	HC-49/U
Mode	Fundamental
Adjustment Tolerance	± 20PPM at 25°C
Temperature Stability	± 50 PPM
Operating Temp. Range	-10°C to +60°C
ESR	25 Ohm
Marking	Mark AELX002L\FREQ+WWYY

Amdt Date	Change Note	AEL Code
		X15M000000L002
		Issue Ref A

© Not to be reproduced without permission from AEL Crystals Ltd