

3.2 x 2.5 mm SMD RTC CXO 7XZ SERIES




Features

- > Ultra small 32.768 KHz RTC oscillator in seam sealed ceramic package.
- > 4 pads design to achieve good soldering contact on PCB.
- > Use AT crystal as the resonator for good temperature performance
- > Tri-State function available for power saving
- > RoHS Compliant / Pb Free

Electrical Specifications


Item / Type	7XZ
Norminal Frequency	32.768 KHz
Oscillation Mode	AT Fundamental
Output Type	CMOS
Output Load	15 pF, or specify
Supply Voltage	2.8 V , 3.3 V
Frequency Stability	± 25 ppm , ± 50 ppm
Operating Temperature Range	- 10 ~ + 70 °C , - 40 ~ + 85 °C
Storage Temperature Range	- 55 ~ + 125 °C
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD
Rise (Tr) / Fall (Tf) Time	300 ns Max.
Current Consumption	3 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	10 ms Max.
Tri-state Voltage Vol (Max.) / Voh (Min.)	0.3 VDD / 0.7 VDD
Aging (at 25 °C)	± 5 ppm at first year.

Dimensions

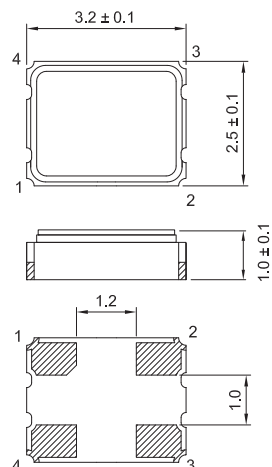

PAD FUNCTION:
 1:ENABLE CONTROL
 2:GND
 3:OUT
 4:VDD

Suggested Layout



Units:mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>