



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No. 1398

| DCP # | REV | DESCRIPTION | DRAWN | DATE | CHECKD | DATE | APPRVD | DATE |
|-------|-----|----------------------|-------|----------|--------|----------|--------|----------|
| XX | XX | XXXX | XXXX | 14-08-08 | XXXX | 14-08-08 | XXXX | 14-08-08 |
| 2067 | B | Listing Info Updated | JN | 08-17-09 | JN | 08-17-09 | JN | 08-17-09 |

MATERIAL

- 2-1. Frame : Thermoplastic PBT of UL 94V-0
- 2-2. Impeller : Thermoplastic PBT of UL 94V-0
- 2-3. Bobbin : Thermoplastic PBT of UL 94V-0
- 2-4. Lead Wire : UL1007, 24 awg, +RED, -BLACK

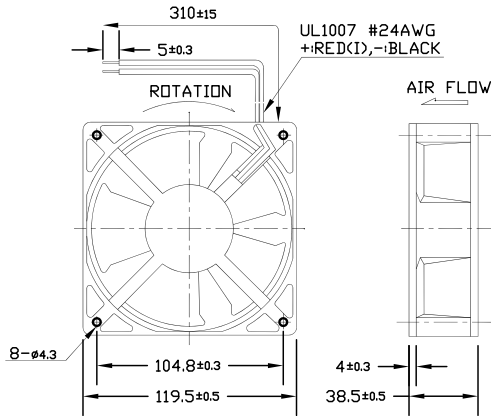

- 1. Air Flow Direction: Toward label side.
- 2. Best Mounting Direction: Any orientation.

Units:mm



DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

| | |
|--------------|----------|
| DRAWN BY: | DATE: |
| XXXX | 14-08-08 |
| CHECKED BY: | DATE: |
| XXXX | 14-08-08 |
| APPROVED BY: | DATE: |
| XXXX | 14-08-08 |

| | | | |
|-------------------------|---------------------|-----------------|-----|
| DRAWING TITLE: | | | |
| DC BRUSHLESS FAN | | | |
| SIZE | DWG. NO. | ELECTRONIC FILE | REV |
| A | MC19627 | 70K8510 | |
| SCALE: NTS | U.D.M.: INCHES [mm] | SHEET: 1 OF 4 | |

CHARACTERISTICS

- | | | |
|---------------------------------|---|--|
| 1. Motor Design | : | Patented single-coil DC brushless 6 pole motor design. |
| 2. Insulation Resistance | : | More than 500M ohm between internal stator and lead wire(+) measured at DC 500V. |
| 3. Dielectric Strength | : | Applied AC 500V for one minute or AC 600V for 2 seconds between and lead wire(+) |
| 4. Noise Level | : | Measured in a semi-anechoic chamber with background noise level below 15 dB(A). The fan is running in free air with the microphone at a distance of one meter from the fan intake. |
| 5. Input Power, Current & Speed | : | Measured after continuous 10 minute operation at rated voltage in clean air, and at ambient temperature of 25 degrees C. |
| 6. Tolerance | : | ±15% on rated power and current. |
| 7. Air Performance | : | Measured by a double chamber. The values are recorded when the fan speed has stabilized at rated voltage. |



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SIZE DWG. NO.

A

MC19627

ELECTRONIC FILE

70K8510

REV

SPC-F005.DWG

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

SCALE: NTS

U.O.M.: Millimeters

SHEET: 2 OF 4

SPECIFICATIONS

| | | |
|------------------------------|---|--|
| 1-1. Rated Voltage | : | 24 VDC |
| 1-2. Operating Voltage Range | : | 12~27.6 VDC |
| 1-3. Starting Voltage | : | 12 VDC (25 deg. C POWER ON/OFF) |
| 1-4. Rated Speed | : | 3000 RPM \pm 10% |
| 1-5. Air Delivery | : | 107 CFM |
| 1-6. Static Pressure | : | 0.3 Inch-H ₂ O |
| 1-7. Rated Current | : | 244 mA |
| 1-8. Rated Power | : | 5.9 WATTS |
| 1-9. Noise Level | : | 41 dB(A) |
| 1-10. Direction of Rotation | : | Counter-clockwise viewed from front of fan blade |
| 1-11. Operating Temperature | : | -10 to +70 deg.C |
| 1-12. Storage Temperature | : | -40 to +70 deg.C |
| 1-13. Bearing System | : | Lubricated sleeve bearing system |
| 1-14. Weight | : | 326g |
| 1-15. Safety | : | UL/CUR Approvals |
| 1-16. Vibration | : | Vibration of acceleration 1.5G and Frequency 5~50~50Hz is applied in all directions(X,Y,Z), in cycle of 1 minute each, for a total vibration time of 30 minutes. |
| 1-17. Protection | : | <input checked="" type="checkbox"/> Automatic Restart Capability <small>Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning of the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released.</small> <input type="checkbox"/> Polarity Protection |



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SIZE DWG. NO.

A

MC19627

ELECTRONIC FILE

70K8510

REV

SPC-F005.DWG

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

SCALE: NTS

U.O.M.: Millimeters

SHEET: 4 OF 4