


THIS DOCUMENT CONTAINS AAVID THERMALLOY'S INTELLECTUAL PROPERTY WHICH IS SUPPLIED IN CONFIDENCE; IT MUST NOT BE USED FOR ANY PURPOSE OTHER THAN WHICH IT IS SUPPLIED; IT MUST NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION FROM THE OWNERS

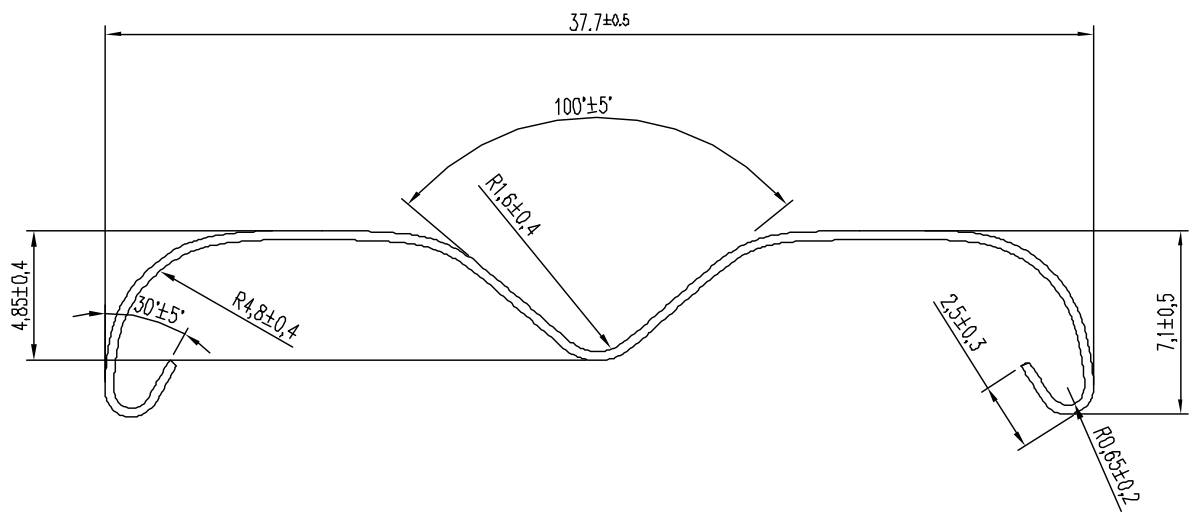

SPECIFICHE DI CARICO:
 Componente spessore 4,0 mm forza F=20N min
 Componente spessore 4,5 mm forza F=23N min
 Componente spessore 5,0 mm forza F=30N min

NOTA:
 DISEGNO PROVVISORIO (VALIDO PER PRODUZIONE) REALIZZATO DA
 SCANSIONE OTTICA DEI PEZZI CAMPIONATI CON QUOTE AL NOMINALE
 SEGUIRA' DISEGNO FORMALMENTE CORRETTO

AAVID THERMALLOY EUROPE
www.aaavidthermalloy.com

Via XXV Aprile, 28
 40027 Quaderno - Bologna ITALY
 Tel. +39 051 794011
 Fax +39 051 794030

Company Manager
 SWINDON WILTS GNR2 8GN UK
 Tel. +44 1793 421480
 Fax +44 1793 913999

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV ISO 9001
 COMPANY WITH QUALITY SYSTEM CERTIFIED BY BSI ISO 9002

Dis. n.	MATERIAL EN10132-4 C67S 0.35 x 4
Fattore	GENERAL TOLERANCES
Partic.	
Area	mm ² FINISH Zincatura bianca alta resistenza
Weight	Tratt.termico: BONIFICA 42-46 HRC
Note:	
Drawn	S.Melotto
Check	
REV	A 25Sep07 ORIGINAL (was ZA3899)
Date	
Revision description	

DRAWING n.	439647
Vis. n.	
Description	590IG Spring clip
By	SE
Format	A4
Scale	1 : 1

all dimensions in mm (ins)

