




**Thermoelectric Cooler NL1025T**


*RoHS 2002/95/EC Compliant*

**Performance Values**

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N <sub>2</sub> ):	64	73
Qmax (watts):	5.2	5.8
I <sub>max</sub> (amps):	1.8	1.8
V <sub>max</sub> (vdc):	4.4	4.9
AC Resistance (ohms):	2.1	---

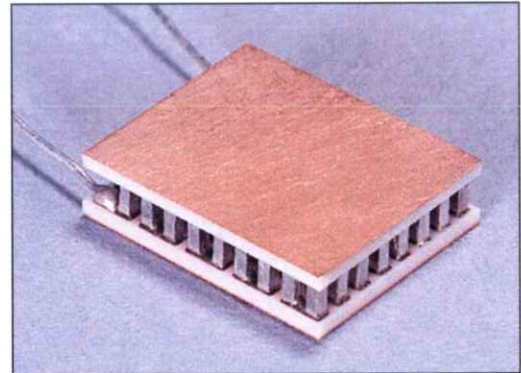

**Mechanical Characteristics**

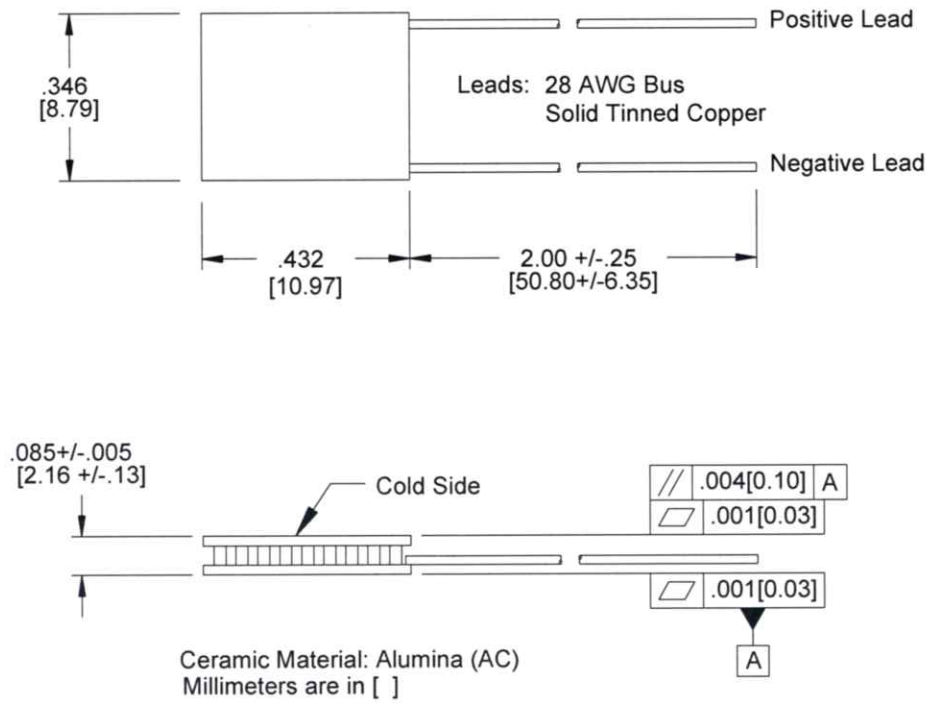

**Ordering Options**

Model Number	Description
NL1025T-01	both surfaces are metallized
NL1025T-02	hot side exterior is metallized
NL1025T-03	no metallization

**Features**

- **RoHS 2002/95/EC compliant**
- For example, and MI1025T with only the hot side metallized is specified as an MI1025T-02AC
- Pretinned metallized ceramic surface(s) with 117°C solder.
- Thermistor mounted on edge of cold side ceramic. (Calibration available.)
- Elevated temperature burn-in with test data provided.




**Performance Curves**


**Environment: One atmosphere dry nitrogen**

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Hot Side Temperature: 27°C

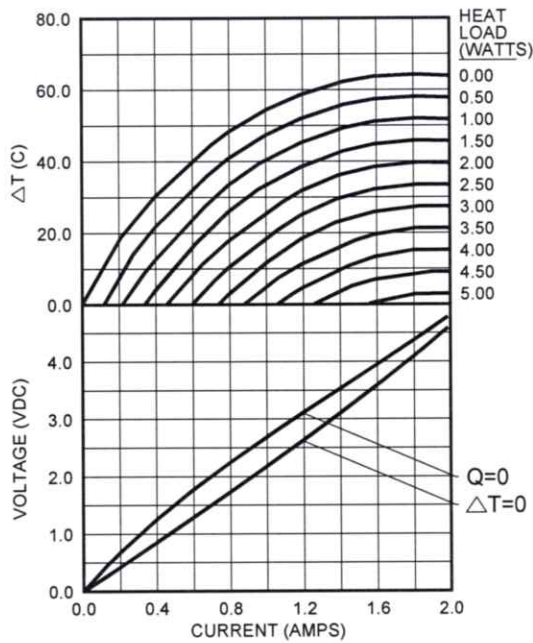

Hot Side Temperature: 50°C

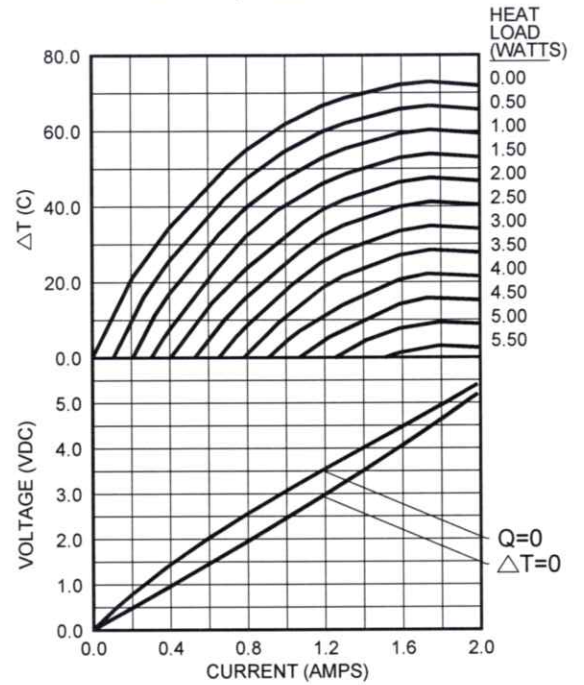

**Installation**

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEC Installation Guide.

**Operation Cautions**

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

**Addresses**

**Marlow Industries, Inc.**  
10451 Vista Park Road  
Dallas Texas 75238-1645  
214-340-4900 (tel)  
214-341-5212 (fax)  
[www.marlow.com](http://www.marlow.com)

**Marlow Industries Europe**  
Aberdeen House, South Road  
Haywards Heath  
West Sussex RH164NG UK  
+44 (0)1444-443404 (tel)  
+44 (0)1444-443334(fax)

**Marlow Industries Japan**  
1-1-8-401  
Uehara, Shibuya-ku  
Tokyo, Japan 151-0064  
+81 (3) 5454-5280 (tel)  
+81 (3) 5454-5281(fax)