


Insulating Kit

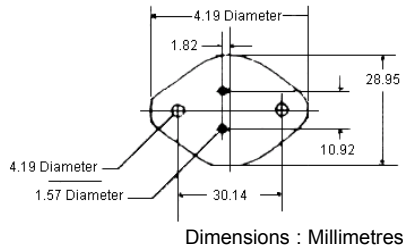

Specifications

Silicone Rubber Insulators Property	0.007 inches thickness
Colour	Grey
Minimum Breaking Strength (lbs/inch)	110
Maximum Elongation (Percent)	5
Maximum Tensile Strength (PSI)	2200
Minimum Tear Strength (lbs/inch)	
Warp Direction	68
Fill Direction	200
Minimum Volume Resistivity (mega ohm to cm) -	
Normal	1.0×10^9
Moist	1.0×10^6
Minimum Breakdown Voltage	
Normal	4000
Moist	2000
Maximum Dielectric Constant at 60Hz to 100 Volts	2.70
Continuous Use Temperature (°C)	-60 to +200
Minimum Thermal Conductivity (cal/cm Seconds °C)	3×10^3
Maximum Thermal Vacuum Weight Loss (Percent)	
As Manufactured	0.40
Post Cure 24 Hours at 400°F	0.25
Maximum Volatile Condensable Material (Percent)	
As Manufactured	0.11
Post Cure 24 Hours at 400°F	0.07
Hardness, Shore A	85
Specific Gravity	2.00 to 2.10
Thickness (Expressed in Inches)	0.007 ± 0.001

Part Number Table

Description	Part Number
Insulating Kit	MK3301/S

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2009.

<http://www.farnell.com>
<http://www.newark.com>
<http://www.cpc.co.uk>

