




SPC  
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.  
SPC-F005.DWG

REVISIONS		DOC. NO. SPC-F005	Effective: 7/8/02		DCP No: 1398	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE
			AMD	01-08-10	JAG	05-08-10
					XXX	17-08-10

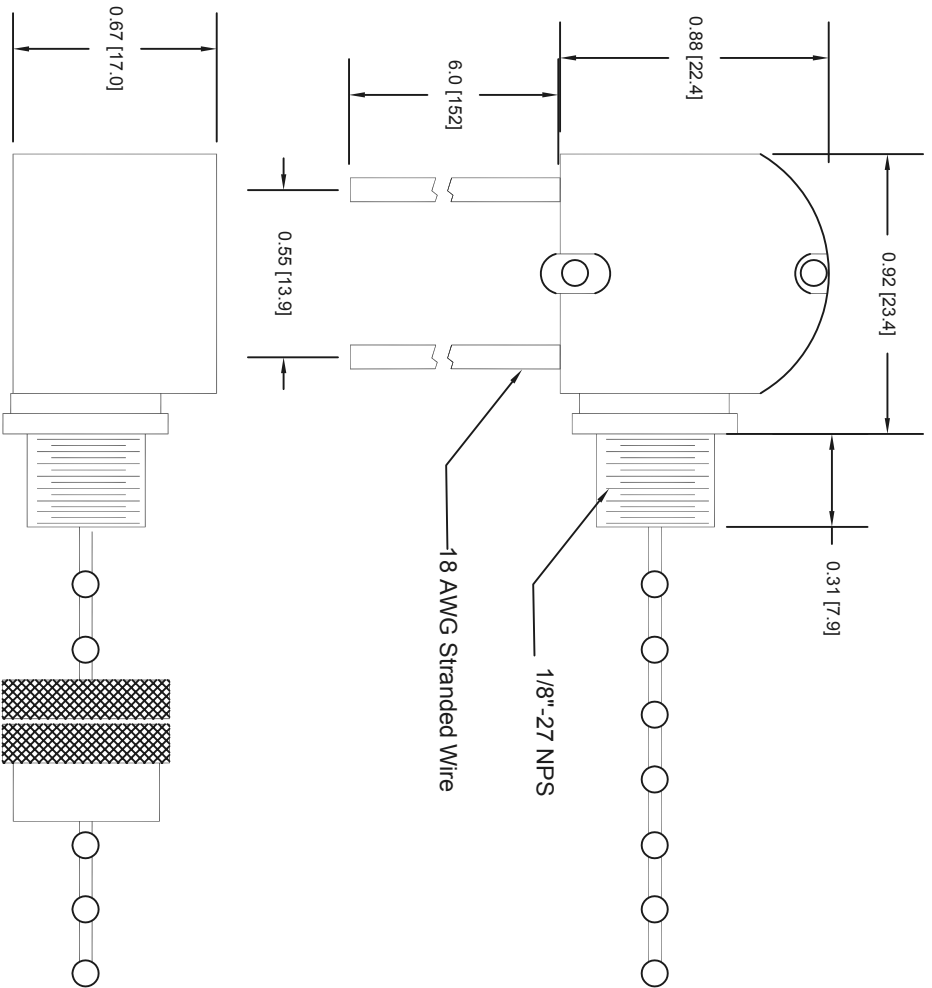

Dimensions : Inches (mm)

**Specifications:**

**Electrical:**

Contact rating : 6A @ 125VAC, 3A @ 250VAC  
 Contact resistance : 30 milliohms maximum  
 Insulation resistance : 1,000 megohms minimum At 500 VDC  
 Dielectric strength : 1,000 VRMS

**Mechanical:**

Life : 10,000 Cycles

**Environmental:**

Operating temperature : -30°C to +85°C

Circuit	Switching Type
SPST	ON-OFF

**Part Number Table**

Description	Part Number
Pull Chain Switch	SPC21175

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	AMD	DATE:	02-08-10
CHECKED BY:	JAG	DATE:	05-08-10
APPROVED BY:	XXX	DATE:	17-08-10

DRAWING TITLE:		<b>Pull Chain Switch</b>	
SIZE	DWG. NO.	ELECTRONIC FILE	REV
XXX	XXX	34C4458	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1