
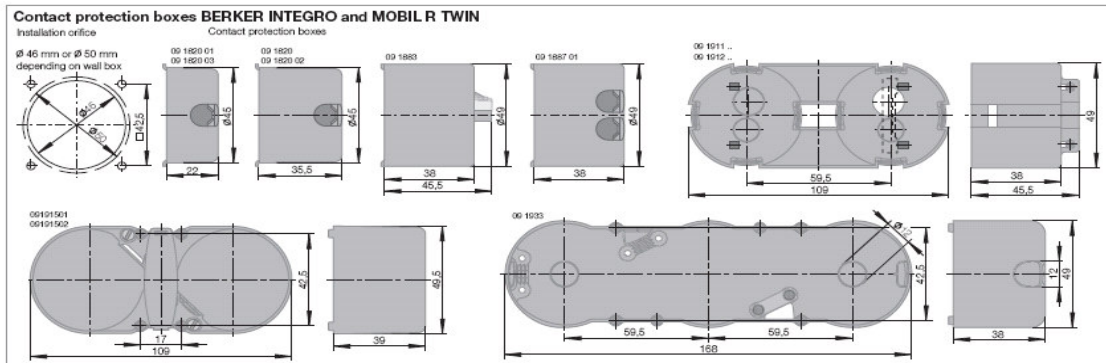


**Installation instructions**

Fastening the inserts use flat headed screws of size M3 / up to M3.5 max.  
Tool size for BERKER products with combination cross-head screws as fixing screws:  
- Cross-head bits, type: Pozidriv size 1.  
- Cross-head screwdriver, type: Pozidriv size 1.  
- Slotted screwdriver, type: blade thickness 0.8 mm.

**Contact screws:**

- Cross-head bits, type: Pozidriv size 2.  
- Cross-head screwdriver, type: Pozidriv size 2  
- Slotted screwdriver, type: blade thickness 1 mm  
When using cordless screwdrivers, e.g. Würth ABS 12-112, setting 1st speed, step 1 with 0.5 Nm.

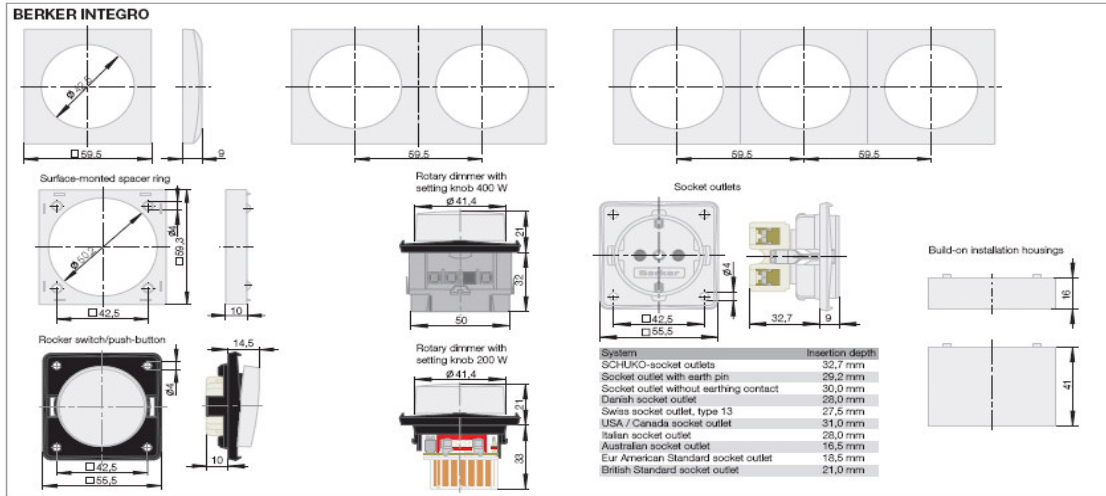

The Berker Integro range is designed for use in:

- Yachts, boats, caravans, static and motor homes
- Laboratories
- Electrical equipment such as PATs, electrical distribution boxes and power sockets
- Furniture such as office furniture and bathroom mirror cabinets
- Power tools and cleaning equipment

Berker products are widely known for:

- Ultra compact designs and minimal installation depths - ideal for applications where space is a premium.
- Ease of installation – no special tool requirements
- Outstanding quality
- Modern and forward thinking design concepts

<b><u>Berker Part No.</u></b>	<b><u>Technical details</u></b>
09-1827-25-09 – Frame 1 gang	<ul style="list-style-type: none"> <li>• Polar white, glossy</li> </ul>
09-1826-25-19 – Frame 2 gang	<ul style="list-style-type: none"> <li>• For vertical and horizontal mounting</li> </ul>
09-3651-25-09 – Rocker switch	<ul style="list-style-type: none"> <li>• Polar white, glossy, off</li> <li>• 16AX 250V</li> <li>• Suitable for all Berker Integro wall boxes</li> </ul>
09-4185-25-02 – SCHUKO socket outlet	<ul style="list-style-type: none"> <li>• Suitable for all Berker Integro wall boxes</li> <li>• Connection terminals IEC 60884-1 DIN 49440</li> <li>• With screw terminals</li> </ul>
09-6262-25-02 – British standard socket outlet	<ul style="list-style-type: none"> <li>• 13A, 250V</li> <li>• Suitable for all Berker Integro wall boxes</li> <li>• Standard BS 1363</li> <li>• 2 pole and earth</li> <li>• With screw terminals</li> </ul>
09-4570-25-05 – Motor vehicle power socket outlet	<ul style="list-style-type: none"> <li>• 6-24V, 20A at 2.5mm<sup>2</sup>, 15A at 1.5mm<sup>2</sup></li> <li>• Not suitable for wall boxes</li> <li>• With flat plug connection</li> </ul>
1980 – Mini jack 8 pole	<ul style="list-style-type: none"> <li>• Black, RJ45, cat.3 ISDN-compatible</li> <li>• Protective screen DIN EN 55022 class B</li> <li>• Colour code A and B EIA/TIA 568A</li> <li>• With insulation piercing terminals</li> </ul>
09-1828-25-99 – Frame with hinged cover and IP44 imprint	<ul style="list-style-type: none"> <li>• Protection class IP44 only guaranteed when used with seal 09-1853</li> <li>• For the cover on socket outlets</li> </ul>
09-1853 – Seal	<ul style="list-style-type: none"> <li>• For rocker switches and push buttons</li> <li>• For SCHUKO socket outlets and socket outlets with earth pin</li> <li>• Use with 09-1828-25-99 for IP44 protection</li> </ul>
19820 – Wall box 45mm Ø	<ul style="list-style-type: none"> <li>• Grey with cable clamp</li> <li>• Insertion depth 35.5mm</li> <li>• Flame resistant according to VDE 0606-1</li> <li>• For switches and socket outlets</li> <li>• With 4 line entries</li> <li>• 3 knockout openings</li> </ul>