


ANSMANN reserves the right to modify the product without notice. The product is shown in the drawing as an example. The product may vary in appearance and dimensions. The product is shown in the drawing as an example. The product may vary in appearance and dimensions. The product is shown in the drawing as an example. The product may vary in appearance and dimensions.

Technische Daten Akkupack/
technical data rechargeable battery pack
 Nominalspannung/
 nominal voltage : 7.2V
 Nominalkapazität
 nominal capacity : 3000mAh discharge at 0.2C
 Minimumkapazität
 minimum capacity : 2700mAh at 0.2C
 2400mAh at 1.0C 6.0V end discharge voltage
 ambient temperature 20°C
 Standardladung/
 standard charge : 300mA for 14...16hours at 20°C
 Schnellladung/
 fast charge : 3000mA for 1.1hours at 20°C
 Ladeverfahren/
 charging method : -dV 30...60mV
 Erhaltungsladung/
 trickle charge : 35...150mA
 Lebenserwartung/
 life expectancy : >500 Zyklen/cycles bei/at IEC standard
 Schutzart/
 protection : IP40
 Approbation/
 approval : CE
 Gehäuse/
 housing : Akkugehäus schwarz ABS/
 battery case black ABS
 Betriebstemperatur/
 operating temperature : 0°C.....+25C
 Lagertemperatur/
 storage temperature : -25°C.....+50°C
 Gewicht/
 weight : ca. xxxg inkl. Verpackung und Zubehör/
 approx. xxxg incl. package and accessories
 Verpackung/
 packaging : Einzelverpackung, XXXXXmm (LxBxH)
 individual package, XXXXXmm (LxWxH)

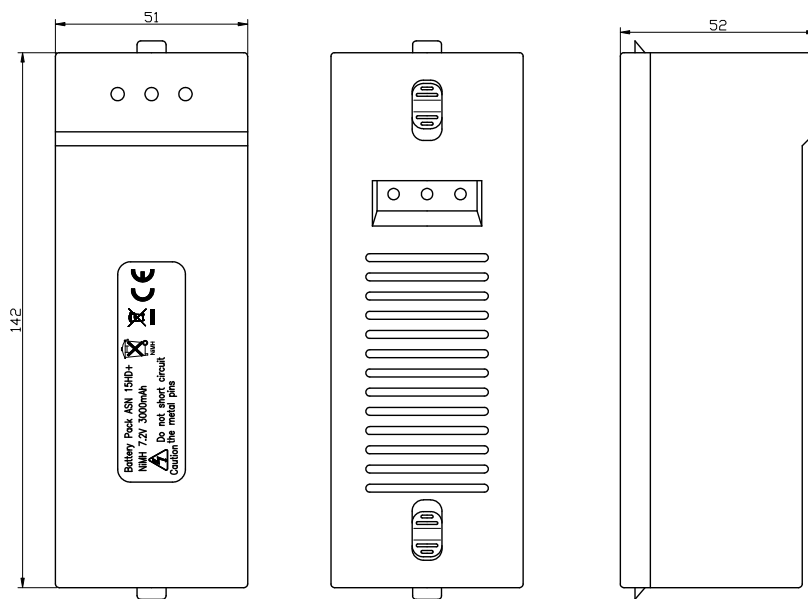

Verwendungsbereich/Application range für Anfrage/for inquiry xxx/xx		Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale 1:1	Gewicht/Weight	
				Werkstoff/Work material, Modell-Nr.		
		2008	Datum/Date	Name	Zeichnungsname/Drawing name	
		erstellt/ Drawn by	16.01.	SP	Akkupack für ASN 15 HD+/ battery pack for ASN 15 HD+	
		ANSMANN			Zeichnungsnummer/Drawing number Artikelnummer/Part number	Blatt/ Sheet
V0	---	17.01.08	KK		3002582	1
Version		Anderung/Change		Datum/Date	Name	Ursprung/Origin Proj. XX/XX/XX
				Ersatz für/Replaced by		Ersatz durch/Replaced through