

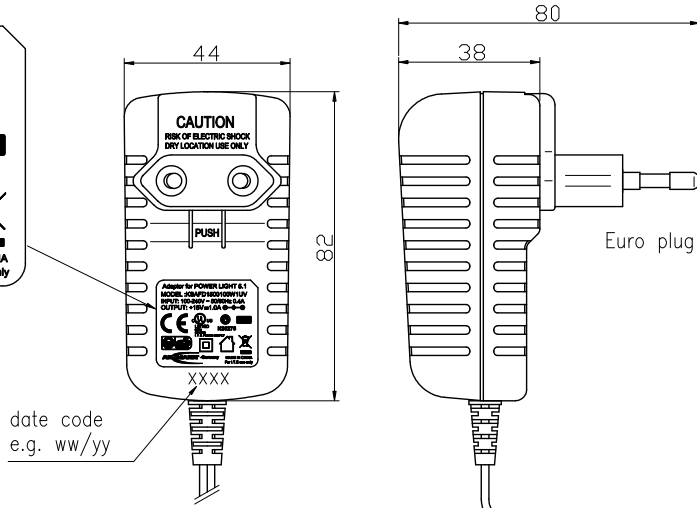


black label with white printing, scale 3:1




date code
e.g. ww/yy

hollow-plug
ø2,1xø5,5x12mm

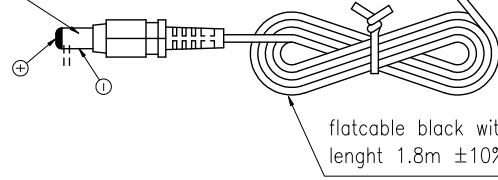


primary plug set


UK plug



Australia plug



US plug



Technische Daten Steckernetzgerät/
technical data plug-in power supply

- Eingangsdaten/
input data : 100-240V AC ±10% / 50/60Hz 0.4A
- Ausgangsdaten/
output data : 15V DC ±10% 1000mA
- Isolation/
insulation : 4kV Eingang/Ausgang
primary/secondary
- Schutzart/
protection : IP 20
- Approbation/
approval : CE; cULus; SAA; BEAB; GS
- Gehäuse/
case : Steckergehäuse schwarz, Material UL94V0/
plug-in case black, material UL94V0
- Betriebstemperatur/
operating temperature : 0°C.....+25°C
- Lagertemperatur/
storage temperature : -25°C.....+50°C
- Gewicht/
weight : ca. xxxg inkl. Verpackung und Zubehör/
approx. xxxg incl. package and accessories
- Verpackung/
packaging : Einzelverpackung, XXXXmm (LxBxH)
individual package, XXXXmm (LxWxH)

Verwendungsbereich/Application range für Anfrage/for inquiry xxx/xx		Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale 1:1	Gewicht /Weight
		2008	Datum/Date 15.01.	Name KK	Werkstoff/Work material, Modell-Nr. XXXXXXXXXXXXXXXXXXXXXXXXXXXX
		Zeichnungsname/Drawing name Power supply ASN15HD+/AS10H+			
		Zeichnungsnummer/Drawing number Artikelnummer/Part number 3002592			Blatt/ Sheet 1
V0	---	15.01.08	KK	ANSMANN	
Version	Anderung/Change	Datum/Date	Name	Ursprung/Origin	Proj. XX/XX/XX
		Ersatz für/Replaced by		Ersatz durch/Replaced through	

This drawing is a technical drawing and is not a photograph. It is intended for use as a reference only. It is not to be used for manufacturing or assembly purposes. The drawing is the property of ANSMANN and is not to be reproduced or distributed without the written consent of ANSMANN. ANSMANN is not responsible for any damage or loss resulting from the use of this drawing.