


HOLE PATTERN:

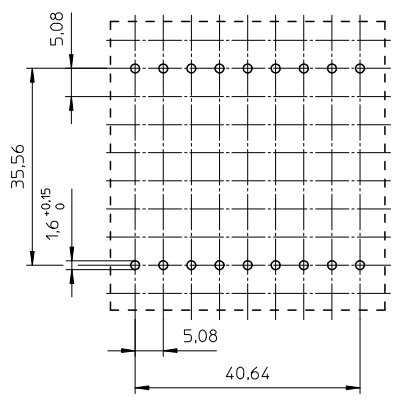

Coil former material: Valox 420SE0 (PBT), glass-reinforced.
 UL file number: E45329(R) - UL94V-0.
 Pin material: Copper-plated steel wire, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 215 mm².
 Mean length of turn: 77 mm.

CLASSNO.	CPH-ETD44-1S-18P		4322 021 01661		96-02-06
97-10-31					96-08-27
					97-10-31
					2007-09-28
					2008-06-19
NAME NAAM	M. Trynkiel	SUPERS. VERV.	001	SH BLK	112 - 001
MPA	CHECK CONTR.	DATE	96-02-06	Property of Eigenaar van	069
					A3
					© FERROXCUBE 2008