

"High Frequency Ceramic Solutions"

5.3 GHz Balun

Detail Specification: 01/08/03

P/N 5325BL15B050


Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
5325BL15B050_	5150 - 5500	50/50 Ω	1.0 dB	9.5 dB	180°±10°	2.0 dB

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 / 50 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

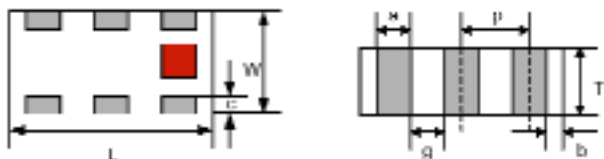


Terminal Configuration

1 Unbalanced Port	4 Balanced Port
2 GND or DC Feed	5 GND
3 Balanced Port	6 NC






Mounting Considerations

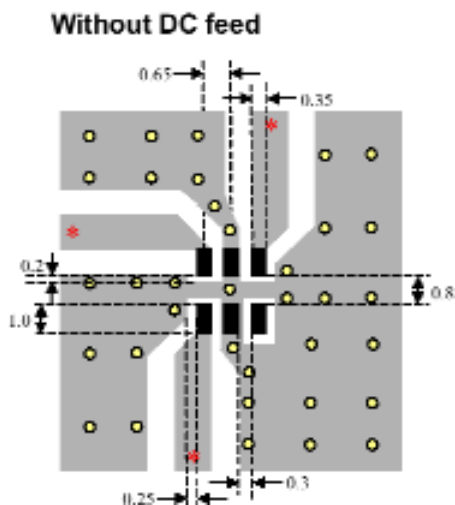
Mount devices with colored mark facing up.



* Line width should be designed to provide 50 Ω impedance matching characteristics.

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.3)

Units: mm

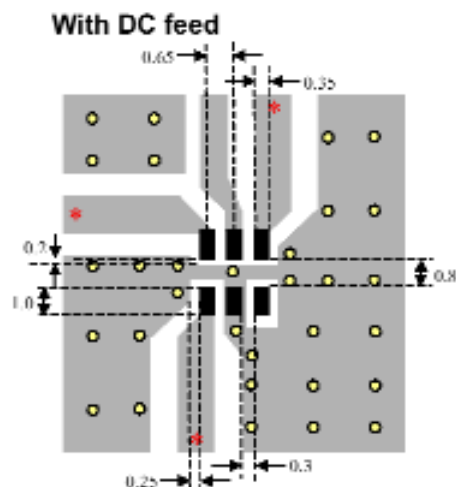

*Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.*

“High Frequency Ceramic Solutions”


5.30 GHz Balun

Detail Specification: 01/08/03

P/N 5325BL15B050

Page 2 of 2

P/N 5325BL15B050 Typical Insertion Loss

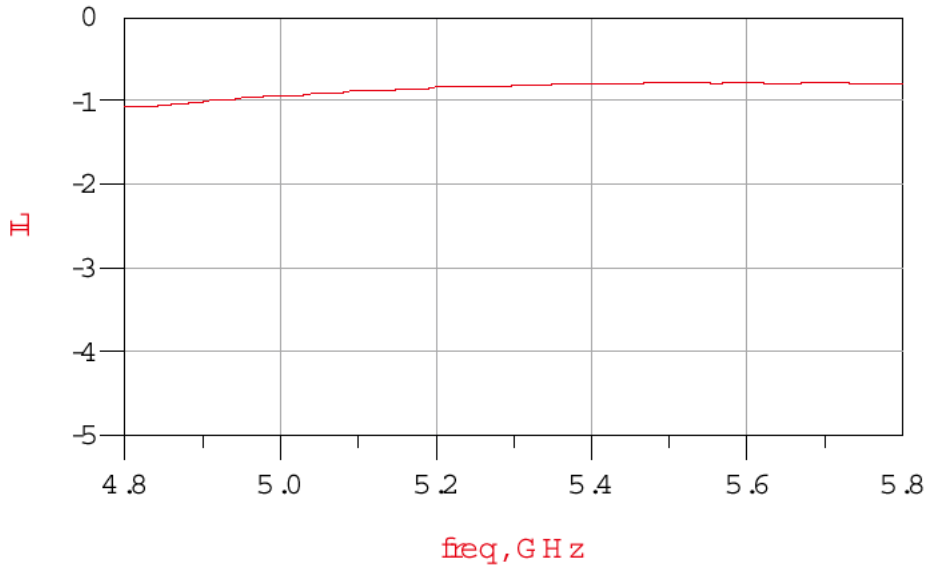

P/N 5325BL15B050 Typical Return Loss

