



CUSTOMER	FILE NO.	50-7755	MCM CUSTOM AUDIO www.mcmnone.com	DRAWN / DATE	APPROVED / DATE
----------	----------	---------	--	--------------	-----------------

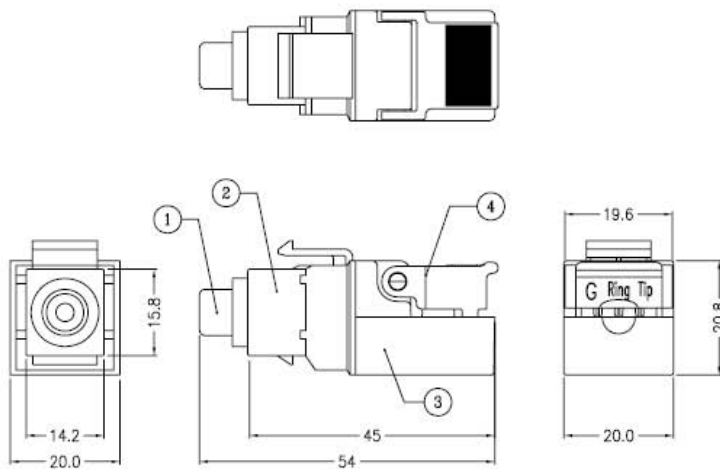

- SPECIFICATION:**
- Bandwidth : DC to 25 MHz
 - Impedance : Input: 75 ohms , Output: 100 ohms
 - Connectors : one RCA to one IDC
 - Maximum Input : 1.0 Vp-p
 - Insertion Loss : ≤ 1dB
 - Common Mode Rejection: Greater than 40 dB
 - Cable-UTP : UTP:24 AWG or lower solid copper
UTP : Impedance: 100 ohms at 1MHz
Max. Capacitance: 20 pf/ft
Attenuation: 6.6 dB/1000 ft at 1 MHz
 - Max. Distatnce : 600 feet (Cat.5)
 - Temperature : Operating: 0° to 55° C
Storage: -20° to 85° C
Humidity: up to 95%

NOTE:
Digital Audio coax, Orange RCA Female to
Toolless IDC, for Keystone mounting

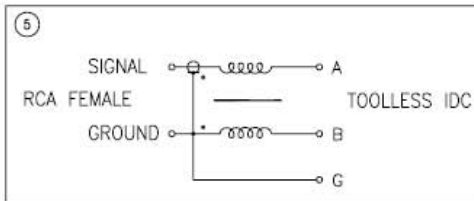

NO.	DESCRIPTION	Q'TY	NOTE
5	PCB SET (TRANSFORMER 1:1)	1 Set	
4	TOOLLESS IDC	1 Set	
3	PLASTIC HOUSING	1 Set	
2	RCA Keystone Housing	1 Set	
1	RCA FEMALE SOLDER TYPE (COLOR: Orange insert in RCA Female)	1 Set	

DIMENSIONS ARE IN mm (inches)		TOLERANCES ARE FRACTIONS DECIMALS ANGLES		MATERIAL		P/N		DRAWN		DATE	
MOLD NO.		.X ±0.25		FINISH		PROJECT NO.					
50-7755		.XX ±0.10		COLOR		50-7755				12/16/2005	
DIGITAL RCA BALUM, KEYSTONE MOUNT, ORANGE						SCALE 1:1		SIZE A4		SHEET 1 OF 1	