


CUSTOMER: FILE NO. 50-7761



APPROVED / DATE

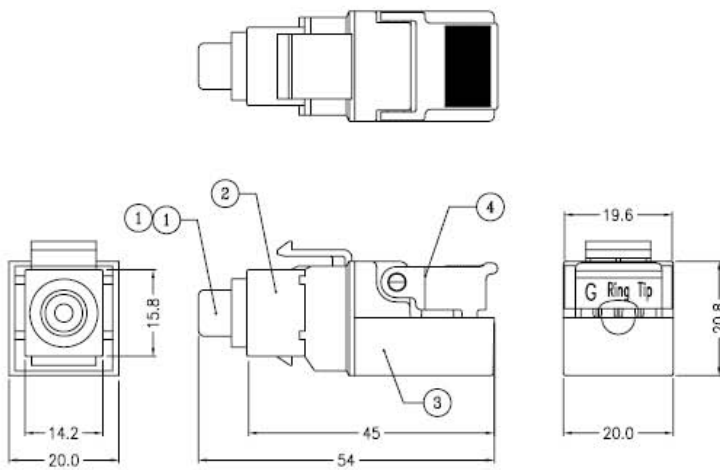


SPECIFICATION:

- Bandwidth : 10Hz to 50KHz ± 3 dB
- Impedance : 600:600 ohms (Audio) , unbalanced to balanced
- Connectors : one RCA to one IDC
- Isolation : 500 V
- Nominal Level : 1.0 volts
- Insertion Loss : ≤ 1 dB
- Common Mode Rejection: Greater than 40 dB
- Cable-UTP : UTP:24 AWG or lower solid copper
UTP : Impedance: 100 ohms at 1MHz
Max. Capacitance: 20 pf/ft
Attenuation: 6.6 dB/1000 ft at 1 MHz
- Max. Distance : 2500feet (Cat.6)
- Temperature : Operating: 0° to 55° C
Storage: -20° to 85° C
Humidity: up to 95%

NOTE:

Left channel Audio , White RCA Female to
Toolless IDC, for Keystone mounting

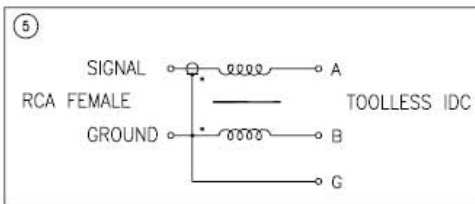

NO.	DESCRIPTION	Q'TY	NOTE
5	PCB SET (TRANSFORMER 1:1)	1 Set	
4	TOOLLESS IDC	1 Set	
3	PLASTIC HOUSING	1 Set	
2	RCA Keystone Housing	1 Set	
1	RCA FEMALE SOLDER TYPE (COLOR: White insert in RCA Female)	1 Set	

DIMENSIONS ARE IN mm (INCH)		TOLERANCES ARE FRACTIONS DECIMALS ANGLES		MATERIAL	P/N	SCALE	SIZE	SHEET	OF	DATE
MOLD NO.	50-7761	.x	± 0.25	FINISH	50-7761	1:1	A4	1	1	12/16/2005
		.xx	± 0.10	COLOR	LEFT AUDIO RCA BALUN, KEYSTONE MOUNT, WHITE					