



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.



REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1102	A	RELEASED	JAP	5/21/96	JN	09/25/08	JN	09/25/08

DOC. NO. SPC-F005 \* Effective: 12/21/98 \* DCP No: 680

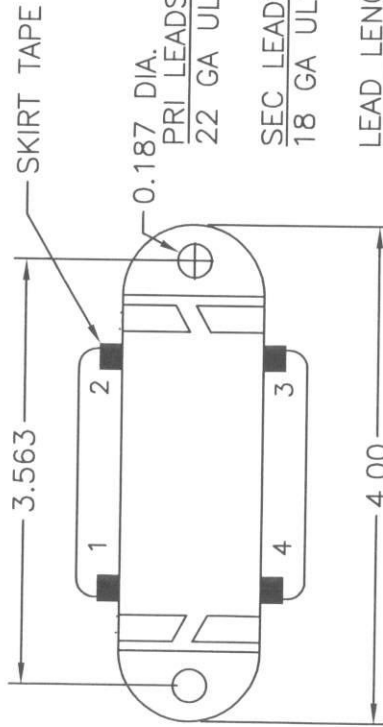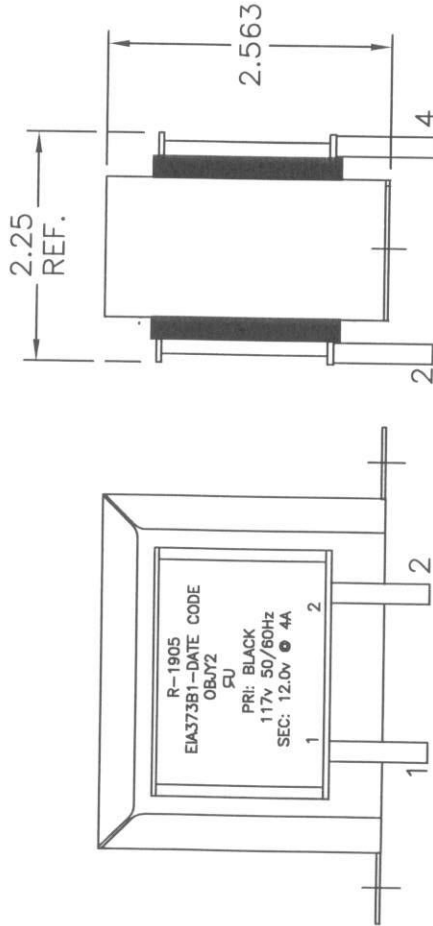

SKIRT TAPE

PRI LEADS:  
22 GA UL1015 105C PVC

SEC LEADS:  
18 GA UL1015 105C PVC

LEAD LENGTH:  
6.000" +/-0.500"

STRIP LENGTH:  
0.500" +/-0.125"

Electrical Characteristics

Primary  
117v +/-15%, FREQUENCY + (50,60)Hz

Secondary  
12.0v @ 4ARMS  
REGULATION: 8.9% (APPROX)

Transformer Isolation  
Pri/Sec 1500v  
Wind/Core 1500v



DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWN BY:	DATE:
		JAP	5/21/96
		CHECKED BY:	DATE:
		JN	09/25/08
		APPROVED BY:	DATE:
		JN	09/25/08



DRAWING TITLE:		Control & Filament Transformer	
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC20982	10M5586.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1