



SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			SHA	14-08-10	MRD	20-08-10	XXX	25-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398



Electrical Characteristics

Primary




117v ±15%, Frequency = (50,60)Hz

Secondary

24.0vct at 8.0ARMS
Regulation: 6.8% (Approx)

Transformer Isolation

Pri/Sec 1500v
Wind/Core 1500v

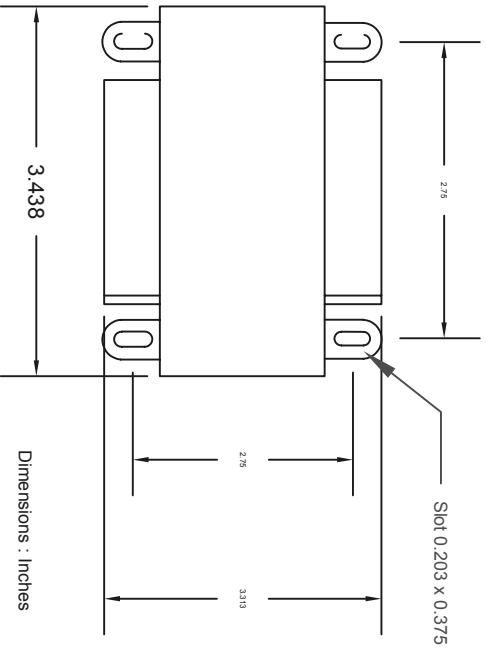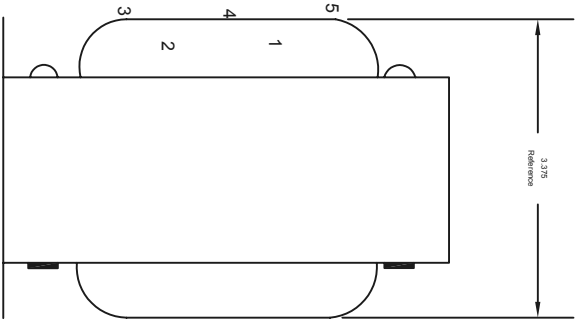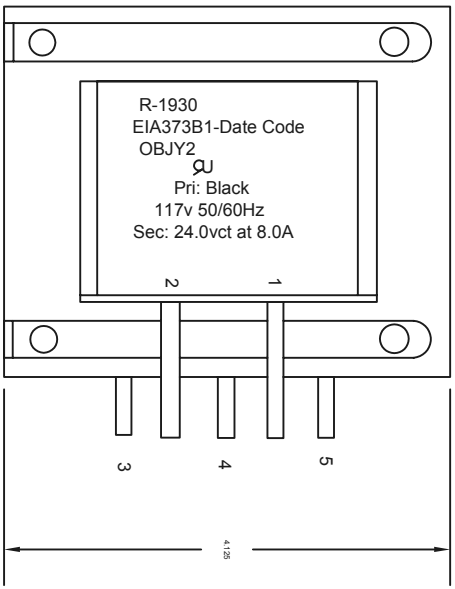


Dimensions : Inches

Pri Leads:
22 GA UL1015 105C PVC

Sec Leads:
22 GA UL1015 105C PVC

Lead Length:
10.000" ±0.500" From Coil

Strip Length:
0.500" ±0.125"

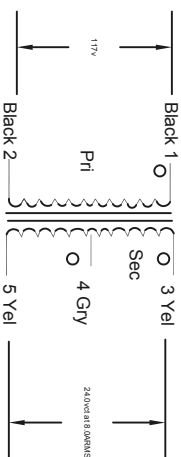

Part Number Table

Description	Part Number
Control & Filament Transformer	SPC20987

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

SHA

DATE:

14-08-10

CHECKED BY:

MRD

DATE:

20-08-10

APPROVED BY:

XXX

DATE:

28-08-10

DRAWING TITLE: Control & Filament Transformer

SIZE

XXX

DWG. NO.

XXX

ELECTRONIC FILE

81n5381

REV

A

SCALE:

NTS

U.O.M.: INCHES [mm]

SHEET:

1 OF 1