




PRIMARY VOLTAGE

Protection	Reference	Secondary voltage V	Secondary Current m A	No-load voltage V	Ambient Temperature °C	Rating VA
	44085	6	250	9,7	T 70 B	1,5
	44086	9	167	14,5	T 70 B	1,5
	44087	12	125	19,3	T 70 B	1,5
	44088	15	100	24,2	T 70 B	1,5
	44089	18	83	29,8	T 70 B	1,5
	44090	24	63	38,6	T 70 B	1,5
	44091	2 x 6	2 x 125	2 x 9,7	T 70 B	1,5
	44092	2 x 9	2 x 83	2 x 15	T 70 B	1,5
	44093	2 x 12	2 x 63	2 x 19,3	T 70 B	1,5
	44094	2 x 15	2 x 50	2 x 24,2	T 70 B	1,5
	44095*	2 x 18	2 x 42	2 x 29	T 70 B	1,5
	44096*	2 x 24	2 x 31	2 x 38,6	T 70 B	1,5

* **to be noted** : 2 x 18 V and 2 x 24 non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).


- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 80 grams weight
- Resin class B CEI 85 (20 000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN 61558-2-6 certified (production on request)
- Insulation voltage 4 KV (6 KV MYRRA test)
- 100% tested production
- Certification : CCA procedure on request

1 Secondary winding




Primary winding


2 Secondary windings




Primary winding



Recommended layout for transformers with 1 secondary winding (Allows the use of a transformer with 2 secondary winding)

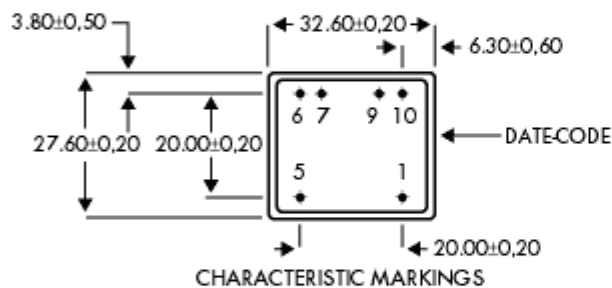

CHARACTERISTIC MARKINGS

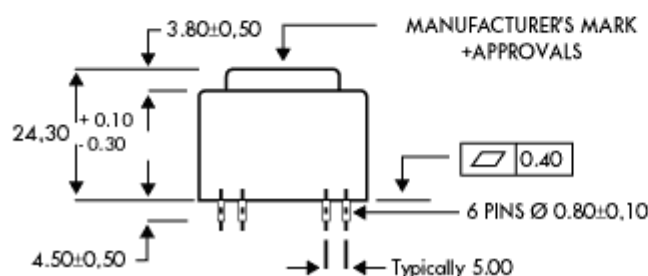

** RECOMMENDED DRILL-HOLE DIAMETER FOR 1,3 mm PINS