





SAFETY ISOLATING TRANSFORMER

POWER : 3.2VA
 INPUT VOLTAGE : 230V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 15V

NON SHORT CIRCUIT PROOF TRANSFORMER
 IP00
 UL94V0

OPERATING TEMPERATURE : -25°C to 70°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 REQUIRED PROTECTION : 250mA FUSE ON SECONDARY

- STANDARDS :
- UL506 (File E111078)
 - CSA 22-2 (File E111078)
 - VDE (File Ref:1398300)
 - EN60950 (File Ref:1398300)
 - EN61558-1 (File Ref:1398300)
 - EN61558-2-6 (File Ref:1398300)
 - CE

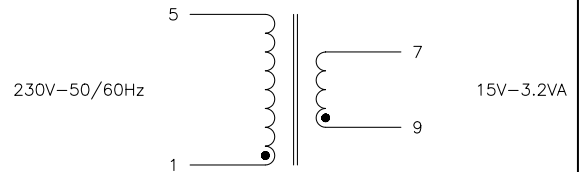

D					
C					
B					
A					
Rev	Date	Modification	Dessiné	Visa	

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matère:		
Material:			
Dessiné par: ROUSSEL.Ch	Date: 22/09/2005	Visa: J.P.M.	
DATA SHEET 44196			
EI 38x13.6			
		22 Allée du Clos des Charmes Z.A. Les Forêts de la Forêt 77390 COLLESEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	
		DS44196	