

**SAFETY ISOLATING TRANSFORMER**





POWER : 3.2VA  
 INPUT VOLTAGE : 230V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 24V

**NON SHORT CIRCUIT PROOF TRANSFORMER**

IPO0  
 UL94V0  
 OPERATING TEMPERATURE : -25°C to 70°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : 160mA FUSE ON SECONDARY

**STANDARDS :**

- UL506 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

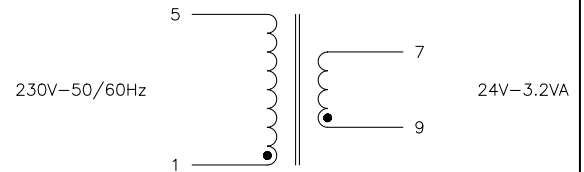

D					
C					
B					
A					
Rev	Date	Modification	Dessiné	Visa	

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matéria:		
Material:			
Dessiné par: ROUSSEL.Ch	Date: 22/09/2005	Visa: J.P.M.	
<b>DATA SHEET 44198</b>			
<b>EI 38x13.6</b>			
		22 Allée du Clos des Charmes Z.A. Les Forêts de la Forêt 77390 COLLESEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	
		<b>DS44198</b>	