



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect


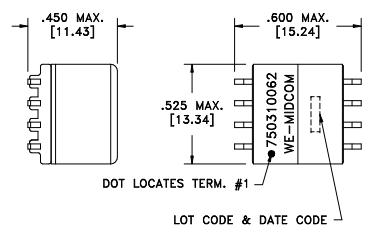


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

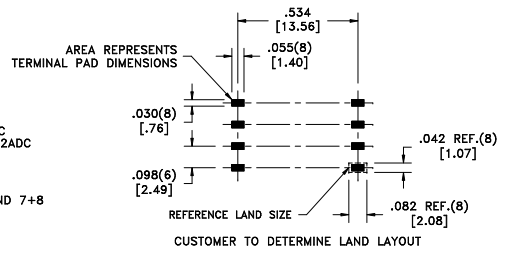

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-4 @20°C	0.535 ohms max.
D.C. RESISTANCE	5-7 tie(5+6, 7+8), @20°C	0.025 ohms max.
INDUCTANCE	3-4 250kHz, 200mVAC, Ls	127uH ±10%
LEAKAGE INDUCTANCE	3-4 tie(5+6+7+8), 250kHz, 200mVAC, Ls	3uH max.
DIELECTRIC	3-5 tie(5+6), 1500VAC, 1 second	-
TURNS RATIO	(3-4):(5-7), tie(5+6, 7+8)	4:1, ±2%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0328 www.midcom-inc.com		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750310062
6A	12/09	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eISos p/n: 750310062	SPECIFICATION SHEET 1 OF 1