



SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISIONS		DOC. NO. SPC-F005	* Effective: 7/8/02	* DCP No: 1398				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	VEE		13-08-10	JAG	19-08-10	XXX	27-08-10	



Electrical Characteristics:

Primary:



Pri #1 115V ±15% FREQ: (50,60)HZ
Pri #2 115V ±15% FREQ: (50,60)HZ

Secondary:

Series 36vct at 0.17ARMS
Parallel 18v at 0.34ARMS
Regulation: 26.5% Approx

Transformer Isolation:

Pri/Pri 500V Pri/Sec 2500V
Sec/Sec 500V Wind/Core 2500V

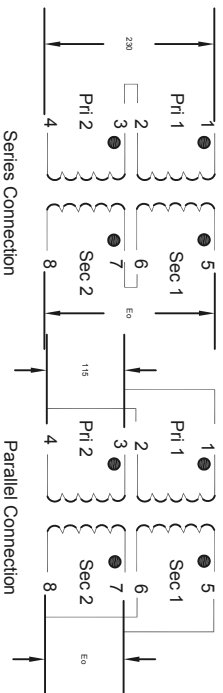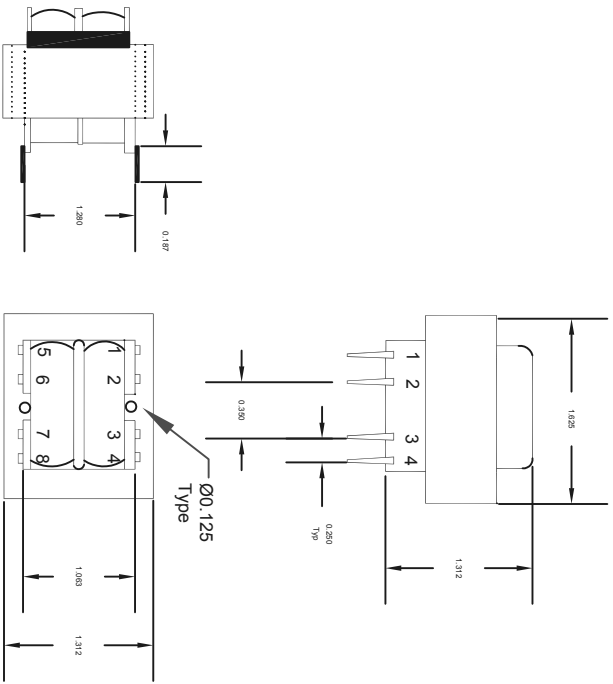

Part Number Table

Description	Part Number
Transformer, PC Mount, Split Bobbin	SPC20966

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY: VEE

DATE: 13-08-10

DRAWING TITLE: Transformer, PC Mount, Split Bobbin

CHECKED BY: JAG

DATE: 19-08-10

SIZE: XXX

DWG. NO.: XXX

ELECTRONIC FILE: 92N4415

REV: A

APPROVED BY: XXX

DATE: 27-08-10

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.