

**SMT Series - Aluminum Wound, Open Style Design**

The SMT series is economical and compact with traditional open wound varnished coils. Ratings are from 1 KVA through 5 KVA with Class 180°C insulation system and **115°C rise** under full load. SMT transformers provide excellent cost benefits with NEMA regulation characteristics and electrical performance specifications.

**Features**


- Available from 1000–5000 VA, 60 Hz unless noted
- Meets or exceeds electrical requirements of NEMA, ANSI, NMTBA and JIC

**Related Products**

- Linear Power Supplies
- DIN Rail DC Power Supplies
- Constant Voltage Transformers
- Line Reactors




**SMT Design Style**

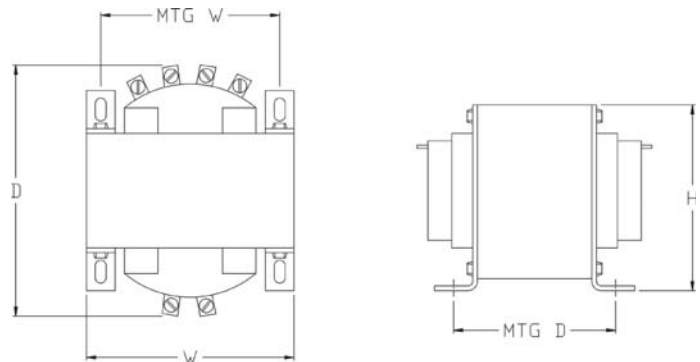

**Selection Table**

**Group 1 – 240 X 480 Volt Primary, 120 Volt Secondary 60 Hz**  
**230 X 460 Volt Primary, 115 Volt Secondary 50/60 Hz**  
**220 X 440 Volt Primary, 110 Volt Secondary 50/60 Hz**

VA	Catalog Number	Height (inch)	Width (inch)	Depth (inch)	Mtg Width	Mtg Depth	Slot Size (inches)	Approx. Ship Weight lbs (kg)
1000	<b>T1000</b>	5.63	6.38	6.38	5.31	4.25	.31 x .69	22 (10.00)
1500	<b>T1500</b>	6.25	6.75	8.25	5.75	5.63	.44 x .69	28.3 (12.86)
2000	<b>T2000</b>	6.25	6.75	9.13	5.75	6.63	.44 x .69	38.5 (17.5)
3000	<b>T3000</b>	8	9	9.3	8	5.81	.44 x .69	55 (25.00)
5000	<b>T5000</b>	8	9	11.3	8	7.5	.44 x .69	91 (41.36)

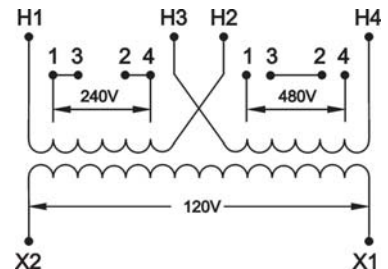

**Note:** Fuse holders are not available for this voltage configuration.

Visit our website at [www.solaheviduty.com](http://www.solaheviduty.com) or contact **Technical Services** at (800) 377-4384 with any questions.