














531-285.

| Type | Side Walls | Pg Knockouts | Inside Height | Ref. No. | Unit |
|--|------------|---|---------------|----------|------|
| POLYSTYRENE - COVER GREY RAL 7035 | | | | | |
| PS 1313- 7 | with Pg |  | 63 mm | 115-405 | 14/2 |
| PS 1313-10 | with Pg |  | 87 mm | 115-905 | 8/2 |
| PS 1313- 7-o | smooth | | 63 mm | 110-405 | 14/2 |
| PS 1313-10-o | smooth | | 87 mm | 110-905 | 8/2 |
| POLYSTYRENE - COVER TRANSPARENT | | | | | |
| PS 1313- 7-t | withPg |  | 63 mm | 116-005 | 14/2 |
| PS 1313-10-t | with Pg |  | 87 mm | 116-505 | 8/2 |
| PS 1313- 7-to | smooth | | 63 mm | 111-005 | 14/2 |
| PS 1313-10-to | smooth | | 87 mm | 111-505 | 8/2 |
| POLYCARBONATE - COVER GREY RAL 7035 | | | | | |
| PC 1313- 7 | with Pg |  | 63 mm | 125-405 | 14/2 |
| PC 1313-10 | with Pg |  | 87 mm | 125-905 | 8/2 |
| POLYCARBONATE - COVER TRANSPARENT | | | | | |
| PC 1313- 7-t | with Pg |  | 63 mm | 135-005 | 14/2 |
| PC 1313-10-t | with Pg |  | 87 mm | 135-505 | 8/2 |

TK 1313
Empty
Enclosure
130 x 130^{mm}
Type of
Protection
IP 66

Knockouts:  = Pg 16/11  = Pg 16  = Pg 21/16  = Pg 29/21
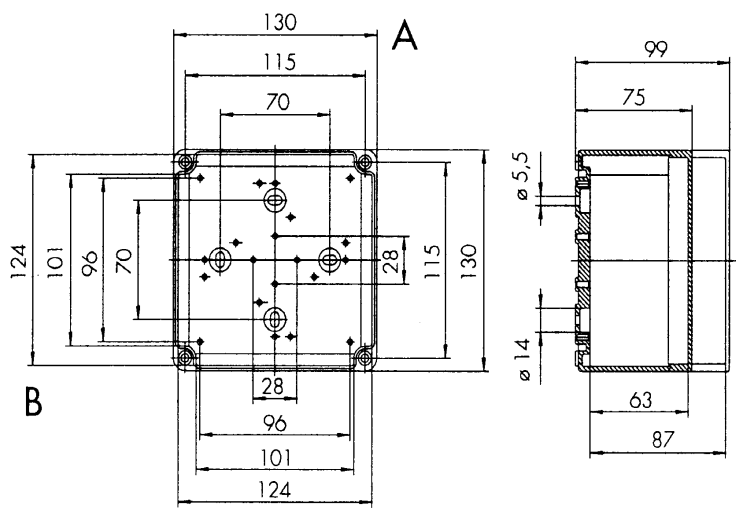
| | | | |
|---|--|----|---|
|  | Max. number of Pg drill holes per box side | | |
| | Pg | A | B |
| 7 | 10 | 10 | |
| 9 | 8 | 8 | |
| 11 | 8 | 8 | |
| 13.5 | 3 | 3 | |
| 16 | 3 | 3 | |
| 21 | 2 | 2 | |
| 29 | 2 | 2 | |
| 36 | - | - | |

All dimensions in millimeters