


CONDUCTIVE CLOSED-CELL PIN-INSERTION FOAM

L2610

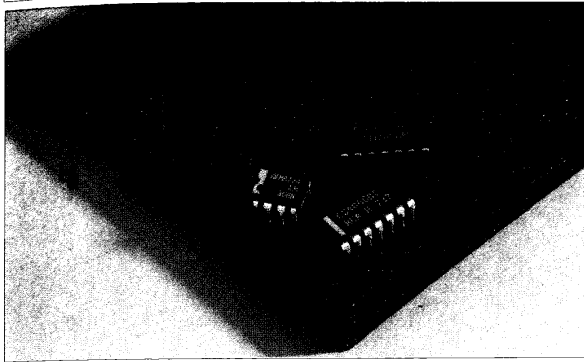

- Cross-linked, closed-cell polyethylene foam
- Excellent chemical and physical stability, good for long term storage
- Ideal pin-insertion and pin-retention characteristics
- Water absorption < 0.5% vol per ISO 2896
- $R_v, R_s = 10^3$ to $10^5 \Omega$, density 60kg/m^3
- Supplied in 7mm thick sheets as below or cut to size

EN

	CODE	UNIT	
7mm x 1.0m x 0.8m	L2610	sheet	■
7 x 305 x 305mm	L2611	piece	■


LABELS

EN100015 and IEC 1340-5-1 require all ESDS to be labelled. The latter standard, to be published in 1997, introduces an additional symbol (see page 11) which serves to label ESD packaging materials and EPA compatible equipment.

We offer self-adhesive paper labels, printed black on yellow, with either symbol in several sizes. All are supplied on rolls of 1000 labels.

EN


LABELS TO EN100 015

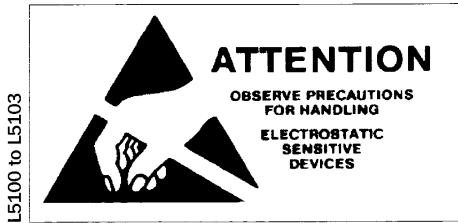

L5100 to L5103


LABEL SIZE W x H	CODE	UNIT	
16x28mm	L5100	1000	□
38x16mm	L5101	1000	■
50x25mm	L5102	1000	■
76x38mm	L5103	1000	■

L5104, L5105, L5106



LABEL SIZE W x H	CODE	UNIT	
5mm square	L5105	1000	■
12.5mm square	L5104	100	■
50mm square	L5106	1000	□

LABELS TO IEC 1340-5-1

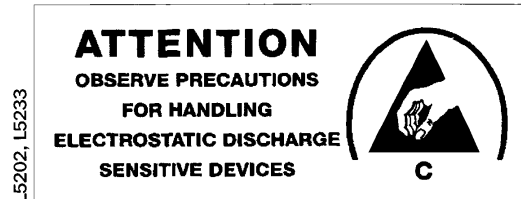

L5202, L5233

LABEL SIZE W x H	CODE	UNIT	
50x25mm	L5202	1000	■
127x50mm	L5233	1000	■

L5204, L5206



LABEL SIZE W x H	CODE	UNIT	
12.5mm square	L5204	1000	■
50mm square	L5206	1000	□

ANTISTATIC PACKING TAPE



L5411

- Does not generate electrostatic charge.
- Suitable for use in EPA.
- Printed yellow with black logo and text to EN 100 015

- Paper tape with water-based acrylic adhesive
- $T_{1000} < 2$ sec at 25% rH
- Tape width 50mm, roll length 66m

EN

	CODE	UNIT	
Antistatic tape	L5411	roll	■