



# Series 652000/653000 PLCC to DIP Adapter RoHS Compliant

## FEATURES:

- Converts PLCC packaged ICs to DIP footprints.
- Ideal for prototyping and testing/evaluation.
- Available with PLCC sockets or PLCC pads on top side.
- Consult factory for panelized form or for mounting of consigned ICs.

## SPECIFICATIONS:


- Adapter body is .062 FR406 or IS410 per IPC4101A/26 with 1 ounce minimum Copper traces both sides finished with ENIG (Immersion Gold over Electroless Nickel).
- Pins are Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- Pin plating is 10µ" Min. Gold Per MIL-G-45204 over 100µ" Min Nickel per SAE-AMS-QQ-N-290.
- Optional PLCC Surface Mount sockets are UL 94V-0 Ryton™.
- Socket contacts are Phosphor Bronze, Tin Plated (RoHS Compliant).

- Current rating=1 Amp.

- Operating temperature=221°F [105°C].

## MOUNTING CONSIDERATIONS

- Suggested PCB hole size=.028 ± .003 [.71 ± .08] dia.
- Will plug into standard IC sockets.
- See table for pad layout when mounting PLCC socket.

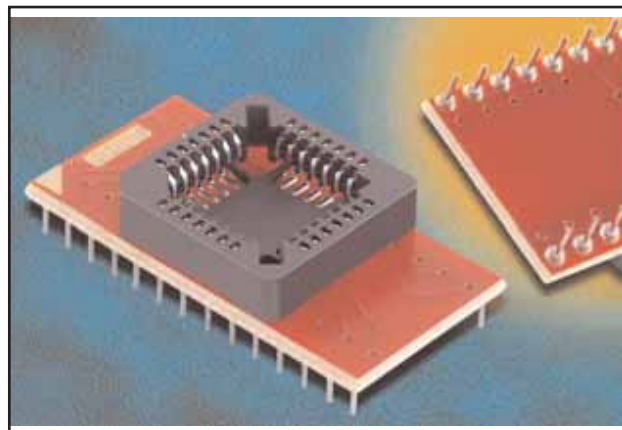

*Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.*

## ORDERING INFORMATION

**XX-65X000-11-RC**





No. of pins:  
28, 32, 44, 68, 84

Series:  
652000: without socket  
653000: with socket

Gold plated  
solder tail pin  
RoHS Compliant

**ALL DIMENSIONS: INCHES [MILLIMETERS]**

All tolerances ± .005 [.13]  
unless otherwise specified

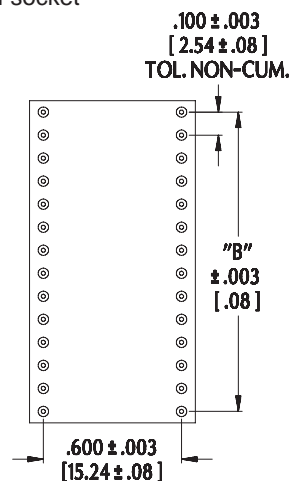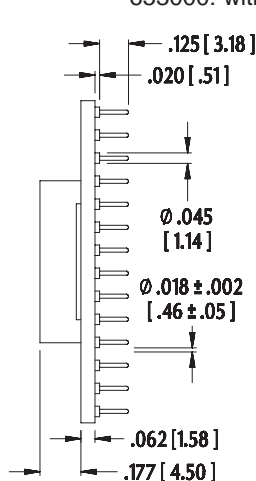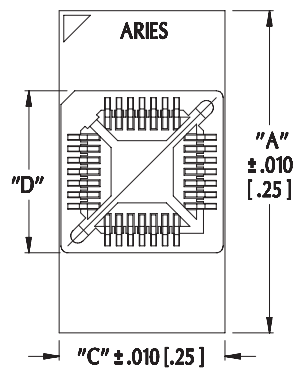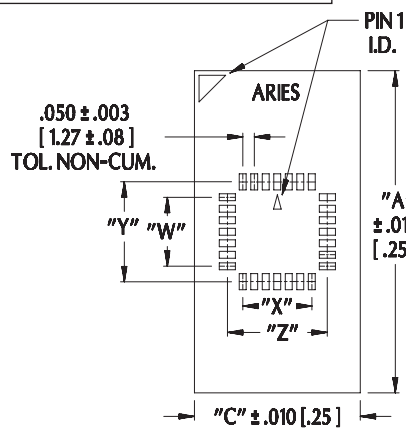

No. of Pos.	Dim "A"	Dim "B"	Dim "C"	Dim "D"	Dim. "W" ±.003 [.08] non-cumulative	Dim. "X" ±.003 [.08] non-cumulative	Dim "Y" ±.003 [.08]	Dim "Z" ±.003 [.08]	Pad Size
28	1.400 [35.56]	1.300 [33.02]	.705 [17.91]	.300 [7.62]	.300 [7.62]	.300 [7.62]	.449 [11.41]	.449 [11.41]	.024x.076 [.61 x 1.93]
32	1.600 [40.64]	1.500 [38.10]	.705 [17.91]	.805 [20.45]	.400 [10.16]	.300 [7.62]	.549 [13.95]	.448 [11.39]	.024x.076 [.61 x 1.93]
44	2.200 [55.88]	2.100 [53.34]	.910 [23.11]	.910 [23.11]	.500 [12.70]	.500 [12.70]	.670 [17.02]	.670 [17.02]	.026 x .080 [.66 x 2.03]
68	3.400 [86.36]	3.300 [83.82]	1.220 [30.99]	1.220 [30.99]	.800 [20.32]	.800 [20.32]	.945 [24.00]	.945 [24.00]	.026 x .080 [.66 x 2.03]
84	4.200 [106.68]	4.100 [104.14]	1.420 [36.07]	1.410 [25.40]	1.000 [24.40]	1.147 [29.13]	1.147 [29.13]	1.147 [29.13]	.026 x .080 [.66 x 2.03]

**ARIES**<sup>®</sup>  
ELECTRONICS, INC.  
http://www.arieselec.com • info@arieselec.com

**NORTH AMERICA**  
Frenchtown, NJ USA  
TEL: (908) 996-6841  
FAX: (908) 996-3891



**EUROPE**  
TEL: +44 870 240 0249  
FAX: +44 871 919 6033  
europe@arieselec.com



18014RC  
REV.B

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED