


# EVEREADY 493



## Industry Standard Dimensions

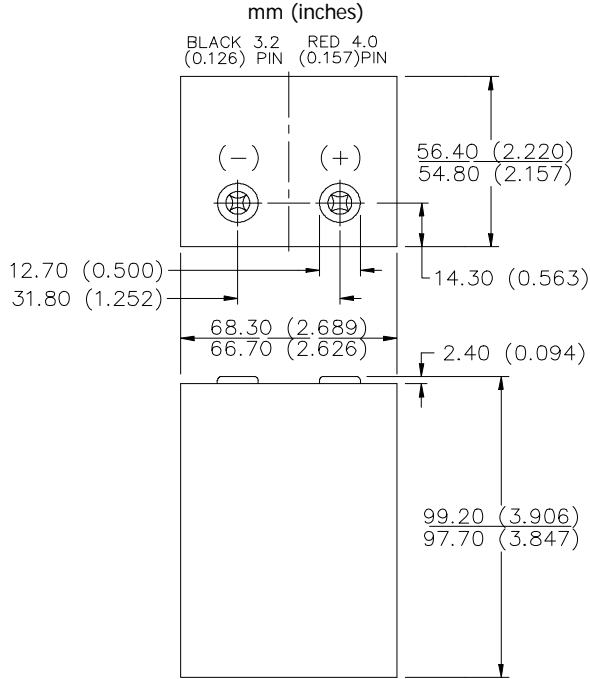

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-722

**Battery Voltage:** 300 Volts

**Average Weight:** 445 grams (15.8 oz.)

**Volume:** 360.5 cubic centimeters (22 cubic inch)


**Average Capacity:** 140 mAh to 0.8 volts/cell  
(Rated at 25 mA continuous drain at 21°C)

**Cells:** Two Hundred No. 112 in series

**Jacket:** Paper

### TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

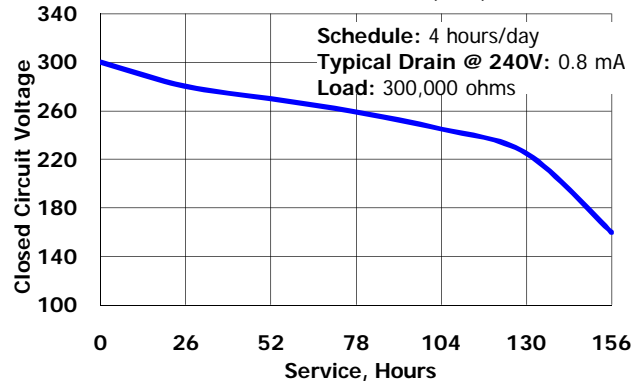

### Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 240V (milliamperes)	Load (ohms)	Cutoff Voltage					
			160V180V	200V220V	240V260V	Hours		
4 hours/day	0.8	300,000	156	147	145	135	115	75

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved