


**EVEREADY 504**



**Industry Standard Dimensions**

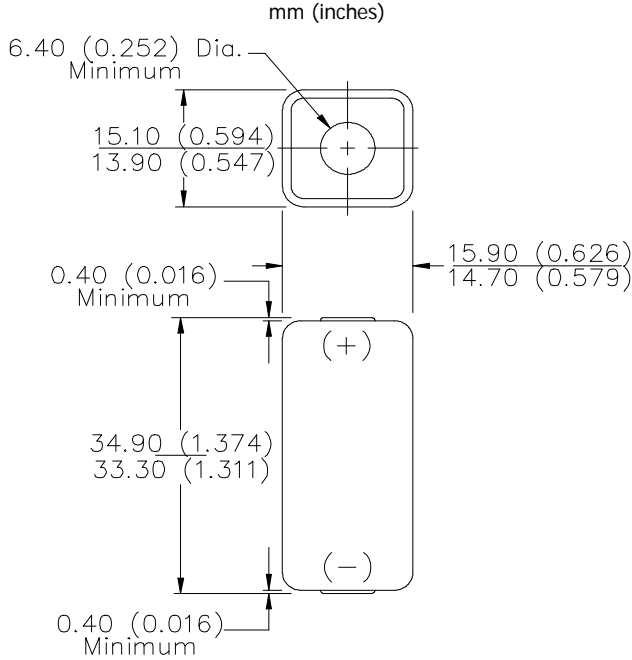

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-220, IEC-10F15

**Battery Voltage:** 15 Volts

**Average Weight:** 15.1 grams (0.5 oz.)

**Volume:** 8 cubic centimeters (0.5 cubic inch)


**Average Capacity:** 60 mAh to 0.8 volts/cell  
(Rated at 25 mA continuous drain at 21°C)

**Cells:** Ten No. 110 in series

**Jacket:** Metal

**TYPICAL DISCHARGE CURVE**

Simulated Test @ 21°C (70°F)

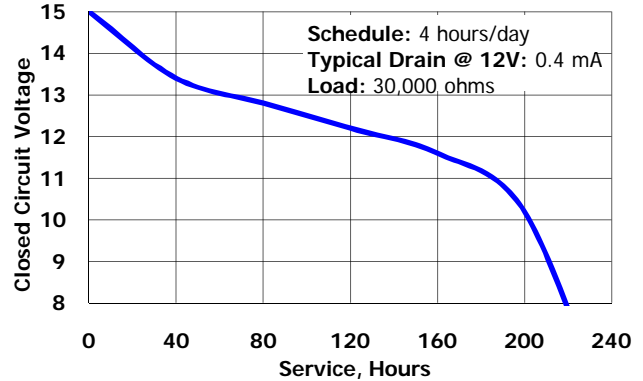

**Simulated Application Test**  
Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 12V (milliamperes)	Load (ohms)	Cutoff Voltage					
			8V	9V	10V	11V	12V	13V
4 hours/day	0.4	30,000	Hours					
			235	222	205	180	132	60
4 hours/day	0.8	15,000	110	103	95	84	63	14

**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved