


# EVEREADY 763



## Industry Standard Dimensions mm (inches)

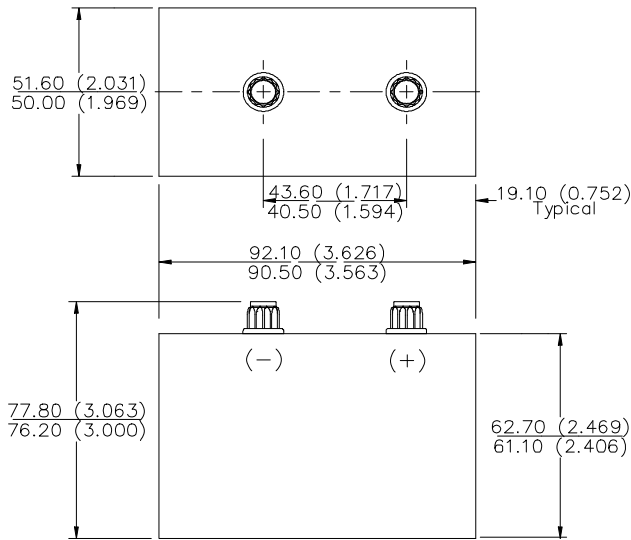

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-710

**Battery Voltage:** 22.5 Volts

**Average Weight:** 372 grams (13.2 oz.)

**Volume:** 311 cubic centimeters (19.0 cubic inch)


**Average Capacity:** 1,700 mAh to 0.8 volts/cell  
(Rated at 25 mA continuous drain at 21°C)

**Cells:** Forty Five No. 130

Three parallel strings of fifteen in series

**Jacket:** Paper

**TYPICAL DISCHARGE CURVE**  
Simulated Test @ 21°C (70°F)

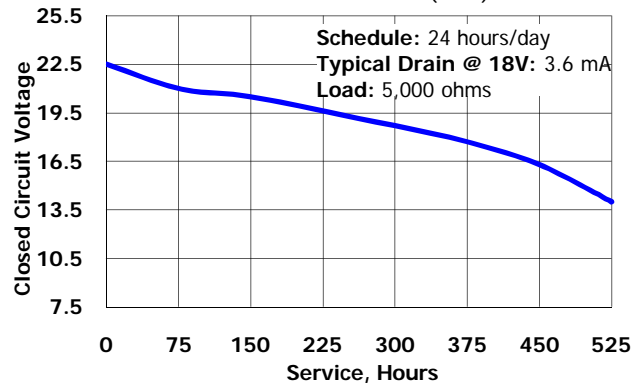

**Simulated Application Test**  
Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 18V (milliamperes)	Load (ohms)	Cutoff Voltage					
			12V	13.5V	15V	16.5V	18V	19.5V
24 hours/day	3.6	5,000	491	435	347	227		
4 hours/day	14.4	1,250	135	125	112	92	75	46

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved