




Eveready Battery Company, Inc.

533 Maryville University Drive  
 St. Louis, MO 63141  
 Telephone 1-800-383-7323  
 Internet: www.energizer.com

## Engineering Data

**AAA**  
**Alkaline 1.5V**  
 No Added Mercury or Cadmium

### ENERGIZER NO. E92

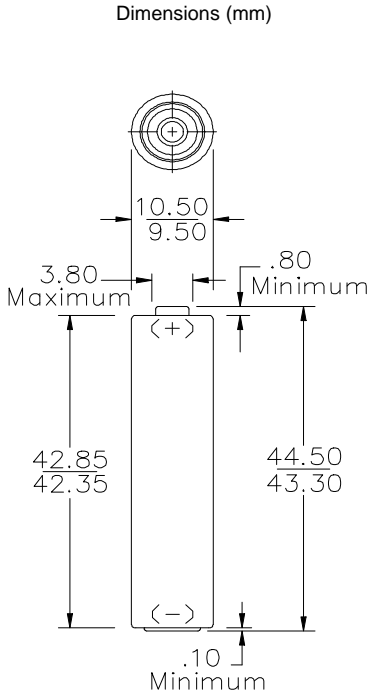

Millimeters	Inches
0.10	0.004
0.80	0.031
3.80	0.15
9.50	0.374
10.50	0.413
42.35	1.667
42.85	1.687
43.30	1.705
44.50	1.752

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI-24A, IEC-LR03

**Battery Voltage:** 1.5 Volts

**Average Weight:** 11.5 grams (0.4 oz.)

**Volume:** 3.8 cubic centimeters (0.2 cubic inch)


**Average Service capacity (to 0.8 Volts / cell):** 1250 mAh  
 (Rated Capacity at 25 mA continuous drain)

**Cell:** One No. 3-312 (size "AAA")


**Jacket:** Plastic Label

**Shelf Life:** 7 years


### Temperature Effects Typical Service to 0.8 Volts

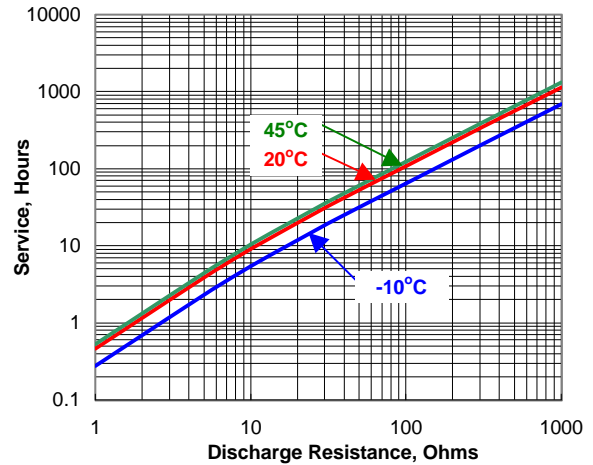


### Constant Resistance Discharge Typical Service

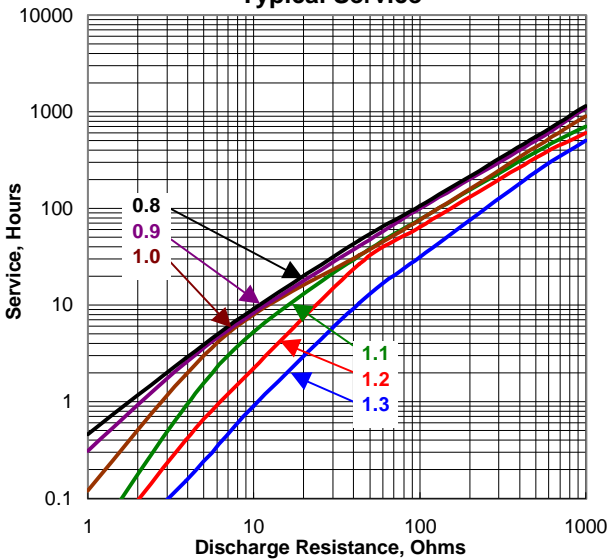







### Constant Current Discharge Typical Service

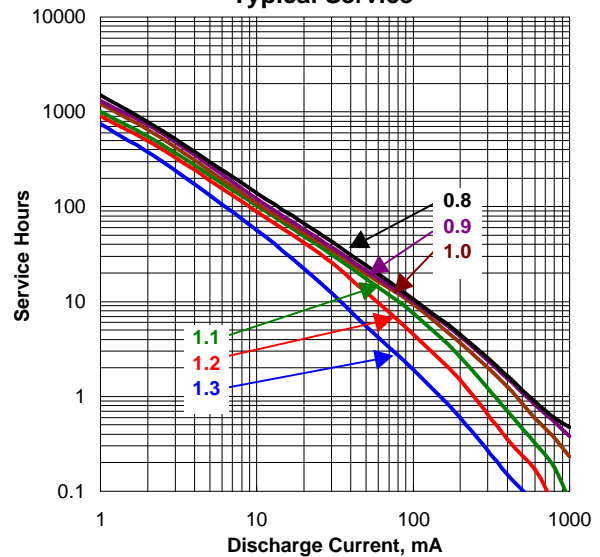

**ENERGIZER NO. E92**

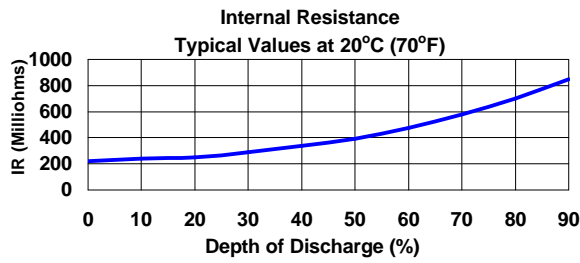

**Typical Applications**

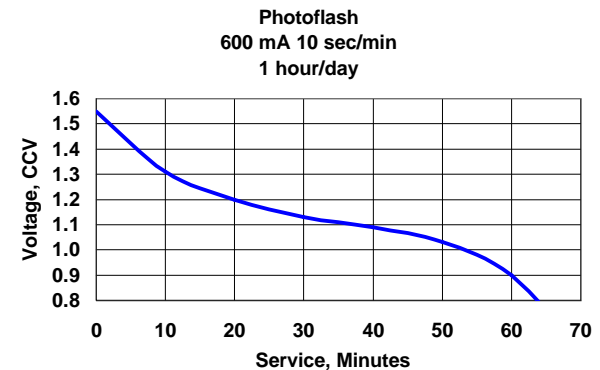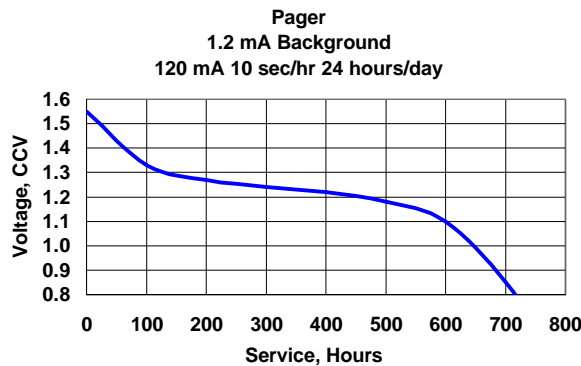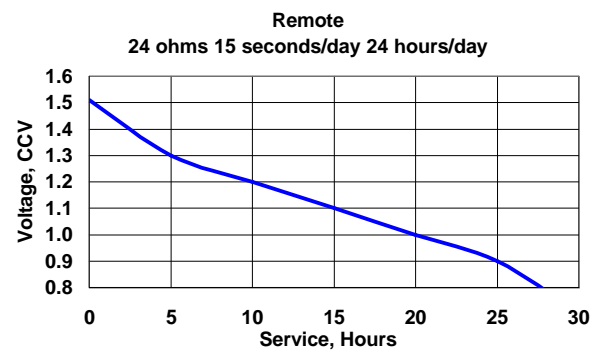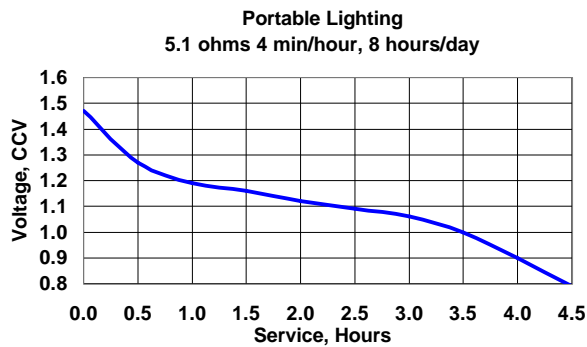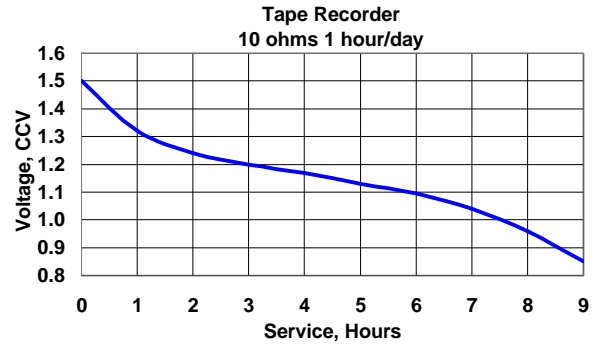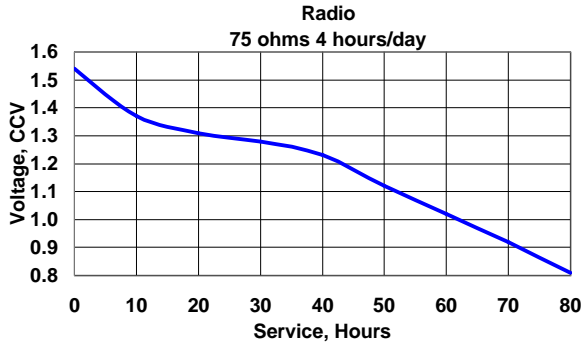

**Important Notice**

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.